



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

**SPECint®\_rate2006 = 3750**

Huawei RH5885H V3 (Intel Xeon E7-8890 v4)

**SPECint\_rate\_base2006 = 3610**

CPU2006 license: 3175


Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Dec-2015

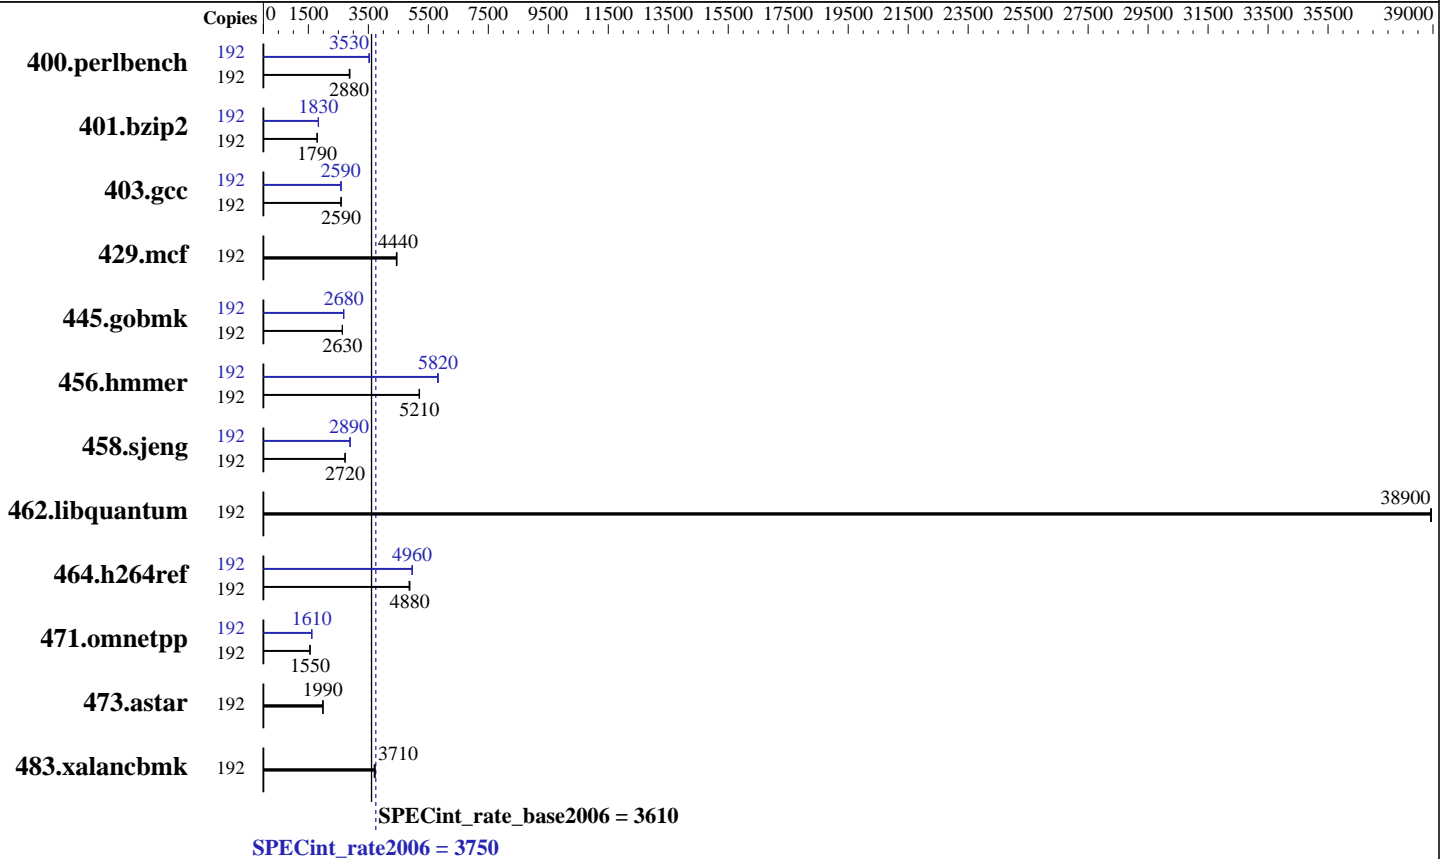

### Hardware

CPU Name: Intel Xeon E7-8890 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 96 cores, 4 chips, 24 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 60 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx8 PC4-2400T-R, running at 1600 MHz)  
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1  
 Kernel 3.12.49-11-default  
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 5 (Multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Huawei

SPECint\_rate2006 = 3750

Huawei RH5885H V3 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3610

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Dec-2016  
Hardware Availability: Jun-2016  
Software Availability: Dec-2015

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	192	655	2860	<b><u>651</u></b>	<b><u>2880</u></b>	651	2880	192	533	3520	<b><u>531</u></b>	<b><u>3530</u></b>	531	3530
401.bzip2	192	1031	1800	<b><u>1034</u></b>	<b><u>1790</u></b>	1034	1790	192	1009	1840	1011	1830	<b><u>1011</u></b>	<b><u>1830</u></b>
403.gcc	192	<b><u>596</u></b>	<b><u>2590</u></b>	596	2590	597	2590	192	<b><u>598</u></b>	<b><u>2590</u></b>	599	2580	595	2600
429.mcf	192	393	4460	395	4430	<b><u>394</u></b>	<b><u>4440</u></b>	192	393	4460	395	4430	<b><u>394</u></b>	<b><u>4440</u></b>
445.gobmk	192	765	2630	<b><u>765</u></b>	<b><u>2630</u></b>	764	2640	192	752	2680	752	2680	<b><u>752</u></b>	<b><u>2680</u></b>
456.hammer	192	345	5190	344	5210	<b><u>344</u></b>	<b><u>5210</u></b>	192	308	5810	<b><u>308</u></b>	<b><u>5820</u></b>	307	5830
458.sjeng	192	853	2720	853	2720	<b><u>853</u></b>	<b><u>2720</u></b>	192	804	2890	804	2890	<b><u>804</u></b>	<b><u>2890</u></b>
462.libquantum	192	<b><u>102</u></b>	<b><u>38900</u></b>	102	38900	102	38900	192	<b><u>102</u></b>	<b><u>38900</u></b>	102	38900	102	38900
464.h264ref	192	870	4880	875	4860	<b><u>871</u></b>	<b><u>4880</u></b>	192	857	4960	<b><u>857</u></b>	<b><u>4960</u></b>	855	4970
471.omnetpp	192	<b><u>772</u></b>	<b><u>1550</u></b>	771	1560	773	1550	192	<b><u>744</u></b>	<b><u>1610</u></b>	744	1610	744	1610
473.astar	192	678	1990	679	1980	<b><u>679</u></b>	<b><u>1990</u></b>	192	678	1990	679	1980	<b><u>679</u></b>	<b><u>1990</u></b>
483.xalancbmk	192	359	3690	355	3730	<b><u>357</u></b>	<b><u>3710</u></b>	192	359	3690	355	3730	<b><u>357</u></b>	<b><u>3710</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Turbo mode set with:  
cpupower -c all frequency-set -g performance

## Platform Notes

BIOS configuration:  
Set Power Efficiency Mode to Performance  
Set Lock\_step to disabled  
Baseboard Management Controller used to adjust the fan speed to 100%  
Set C-State to C0/C1  
Sysinfo program /home/speccpu/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on linux-z8b4 Fri Dec 16 16:44:19 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 3750

Huawei RH5885H V3 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3610

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Platform Notes (Continued)

```

4 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
cache size : 30720 KB

From /proc/meminfo
MemTotal:          529087440 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    # release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
Linux linux-z8b4 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Dec 16 14:15

SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal       xfs   457G  8.0G  449G   2% /home
Additional information from dmidecode:

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 3750

Huawei RH5885H V3 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3610

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Dec-2016  
Hardware Availability: Jun-2016  
Software Availability: Dec-2015

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 5.11 02/05/2016

Memory:

64x NO DIMM NO DIMM

32x Samsung M393A2K43BB1-CRC 16 GB 2 rank 2400 MHz, configured at 1600 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/speccpu/libs/32:/home/speccpu/libs/64:/home/speccpu/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 3750

Huawei RH5885H V3 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3610

CPU2006 license: 3175

Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Dec-2015

## Base Portability Flags (Continued)

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.aster: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmarheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 3750

Huawei RH5885H V3 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3610

CPU2006 license: 3175

Test date: Dec-2016

Test sponsor: Huawei

Hardware Availability: Jun-2016

Tested by: Huawei

Software Availability: Dec-2015

## Peak Portability Flags (Continued)

429.mcf: -D\_FILE\_OFFSET\_BITS=64  
 445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
 456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
 458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64  
 462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
 471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
 473.astar: -D\_FILE\_OFFSET\_BITS=64  
 483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
 -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
 -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
 -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
 -ansi-alias

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 3750

Huawei RH5885H V3 (Intel Xeon E7-8890 v4)

SPECint\_rate\_base2006 = 3610

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Dec-2016

Hardware Availability: Jun-2016

Software Availability: Dec-2015

## Peak Optimization Flags (Continued)

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 11 10:34:50 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 January 2017.