



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2680 v4)

**SPECint®\_rate2006 = 1320**

**SPECint\_rate\_base2006 = 1270**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jan-2017

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2016

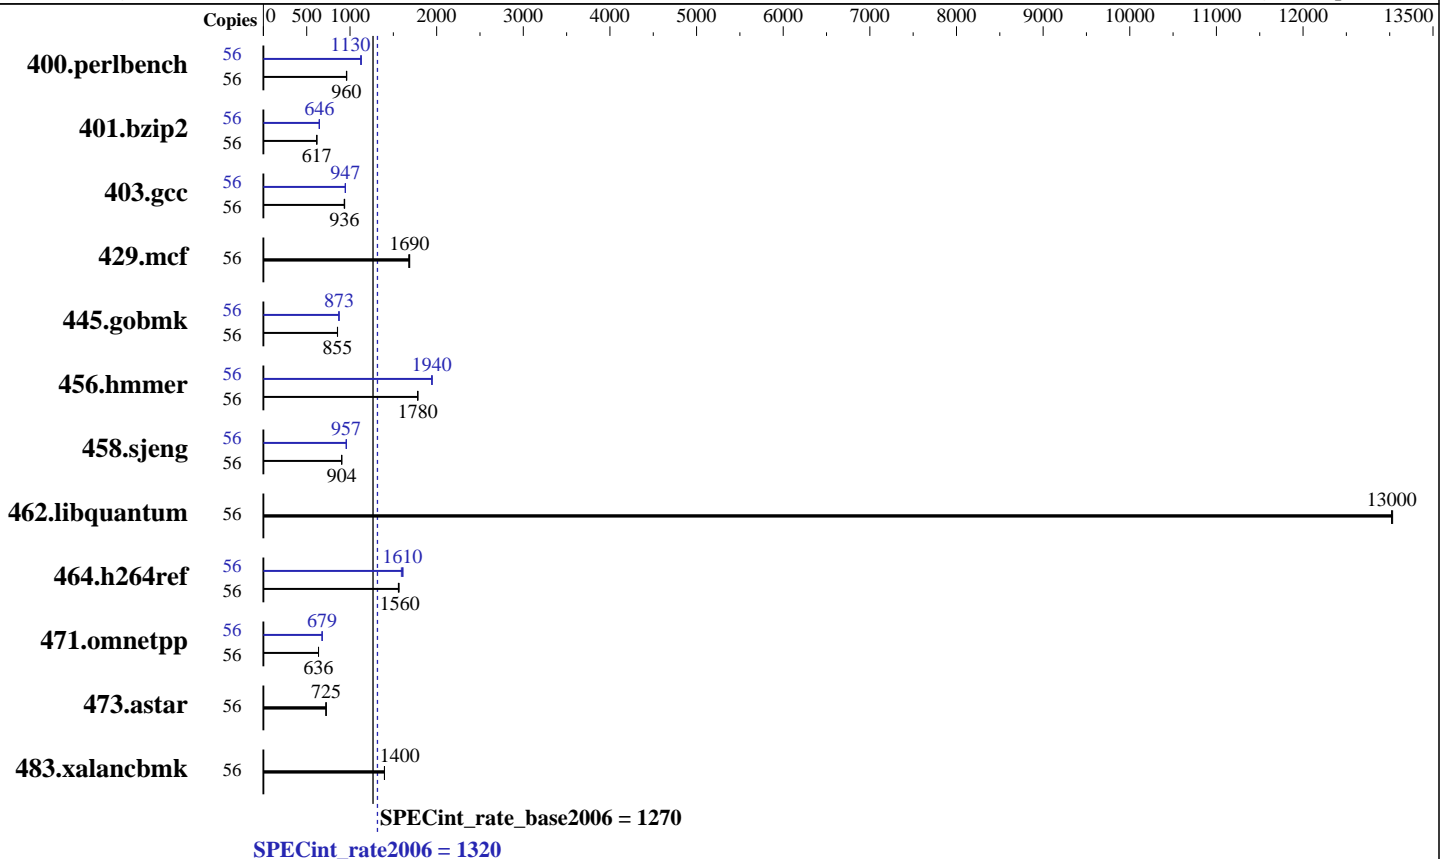

SPECint\_rate\_base2006 = 1270  
SPECint\_rate2006 = 1320

### Hardware

**CPU Name:** Intel Xeon E5-2680 v4  
**CPU Characteristics:** Intel Turbo Boost Technology up to 3.30 GHz  
**CPU MHz:** 2400  
**FPU:** Integrated  
**CPU(s) enabled:** 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
**CPU(s) orderable:** 1,2 chips  
**Primary Cache:** 32 KB I + 32 KB D on chip per core  
**Secondary Cache:** 256 KB I+D on chip per core  
**L3 Cache:** 35 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
**Disk Subsystem:** 2 x 450 GB 15K SAS, RAID 1  
**Other Hardware:** None

### Software

**Operating System:** SUSE Linux Enterprise Server 12 (x86\_64) SP1  
Kernel 3.12.49-11-default  
**Compiler:** C/C++: Version 17.0.0.098 of Intel C++ Studio XE for Linux;  
Fortran: Version 17.0.0.098 of Intel Fortran Studio XE for Linux  
**Auto Parallel:** No  
**File System:** xfs  
**System State:** Run level 3 (multi-user)  
**Base Pointers:** 32-bit  
**Peak Pointers:** 32/64-bit  
**Other Software:** Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.40 GHz, Intel Xeon E5-2680 v4)

SPECint\_rate2006 = 1320

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jan-2017

Hardware Availability: Mar-2016

Software Availability: Sep-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	571	959	<b>570</b>	<b>960</b>	569	962	56	484	1130	<b>486</b>	<b>1130</b>	486	1120
401.bzip2	56	876	617	<b>876</b>	<b>617</b>	877	616	56	838	645	836	646	<b>837</b>	<b>646</b>
403.gcc	56	<b>481</b>	<b>936</b>	483	933	480	938	56	<b>476</b>	<b>947</b>	476	947	477	945
429.mcf	56	304	1680	302	1690	<b>303</b>	<b>1690</b>	56	304	1680	302	1690	<b>303</b>	<b>1690</b>
445.gobmk	56	686	856	687	855	<b>687</b>	<b>855</b>	56	674	871	673	873	<b>673</b>	<b>873</b>
456.hammer	56	<b>293</b>	<b>1780</b>	294	1780	293	1780	56	268	1950	<b>269</b>	<b>1940</b>	269	1940
458.sjeng	56	750	903	749	904	<b>749</b>	<b>904</b>	56	<b>708</b>	<b>957</b>	708	957	708	957
462.libquantum	56	89.1	13000	<b>89.1</b>	<b>13000</b>	89.0	13000	56	89.1	13000	<b>89.1</b>	<b>13000</b>	89.0	13000
464.h264ref	56	791	1570	795	1560	<b>794</b>	<b>1560</b>	56	769	1610	<b>771</b>	<b>1610</b>	778	1590
471.omnetpp	56	550	637	550	636	<b>550</b>	<b>636</b>	56	516	679	516	678	<b>516</b>	<b>679</b>
473.astar	56	545	721	542	725	<b>542</b>	<b>725</b>	56	545	721	542	725	<b>542</b>	<b>725</b>
483.xalancbmk	56	<b>276</b>	<b>1400</b>	277	1400	276	1400	56	<b>276</b>	<b>1400</b>	277	1400	276	1400

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Platform Notes

### BIOS Configuration:

HP Power Profile set to Custom  
HP Power Regulator set to Static High Performance Mode  
Minimum Processor Idle Power Core C-State set to C6 State  
Minimum Processor Idle Power Package C-State set to No Package State  
Collaborative Power Control set to Disabled  
QPI Snoop Configuration set to Cluster on Die  
Thermal Configuration set to Maximum Cooling  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1 x Refresh  
Sysinfo program /cpu/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.40 GHz, Intel Xeon E5-2680 v4)

**SPECint\_rate2006 = 1320**

**SPECint\_rate\_base2006 = 1270**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jan-2017

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2016

## Platform Notes (Continued)

running on PL34 Thu Jan 5 14:23:15 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2680 v4@ 2.40GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 14
  siblings  : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

From /proc/meminfo

```
MemTotal:      264544156 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

uname -a:

```
Linux PL34 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015 (8d714a0)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jan 5 14:18

SPEC is set to: /cpu

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   419G   35G  385G   9% /
```

Additional information from dmidecode:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9  
(2.40 GHz, Intel Xeon E5-2680 v4)

SPECint\_rate2006 = 1320

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jan-2017

Hardware Availability: Mar-2016

Software Availability: Sep-2016

## Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP P89 02/22/2016

Memory:

16x HP 809081-081 16 GB 2 rank 2400 MHz

8x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 256 GB and the dmidecode description should have one line reading as:  
16x HP 809081-081 16 GB 2 rank 2400 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu/libs/32:/cpu/libs/64:/cpu/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalanbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.40 GHz, Intel Xeon E5-2680 v4)

SPECint\_rate2006 = 1320

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jan-2017

Hardware Availability: Mar-2016

Software Availability: Sep-2016

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen9

(2.40 GHz, Intel Xeon E5-2680 v4)

SPECint\_rate2006 = 1320

SPECint\_rate\_base2006 = 1270

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jan-2017

Hardware Availability: Mar-2016

Software Availability: Sep-2016

## Peak Portability Flags (Continued)

483.xalanbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto-ilp32  
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)  
-qopt-ra-region-strategy=block  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/sh10.2 -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380 Gen9**

(2.40 GHz, Intel Xeon E5-2680 v4)

**SPECint\_rate2006 = 1320**

**SPECint\_rate\_base2006 = 1270**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jan-2017

**Hardware Availability:** Mar-2016

**Software Availability:** Sep-2016

## Peak Optimization Flags (Continued)

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jan 25 10:54:15 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 January 2017.