



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo ThinkServer TS150  
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp<sup>®</sup>\_rate2006 = 214

SPECfp\_rate\_base2006 = 207

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Mar-2017

Hardware Availability: Apr-2017

Software Availability: Sep-2016

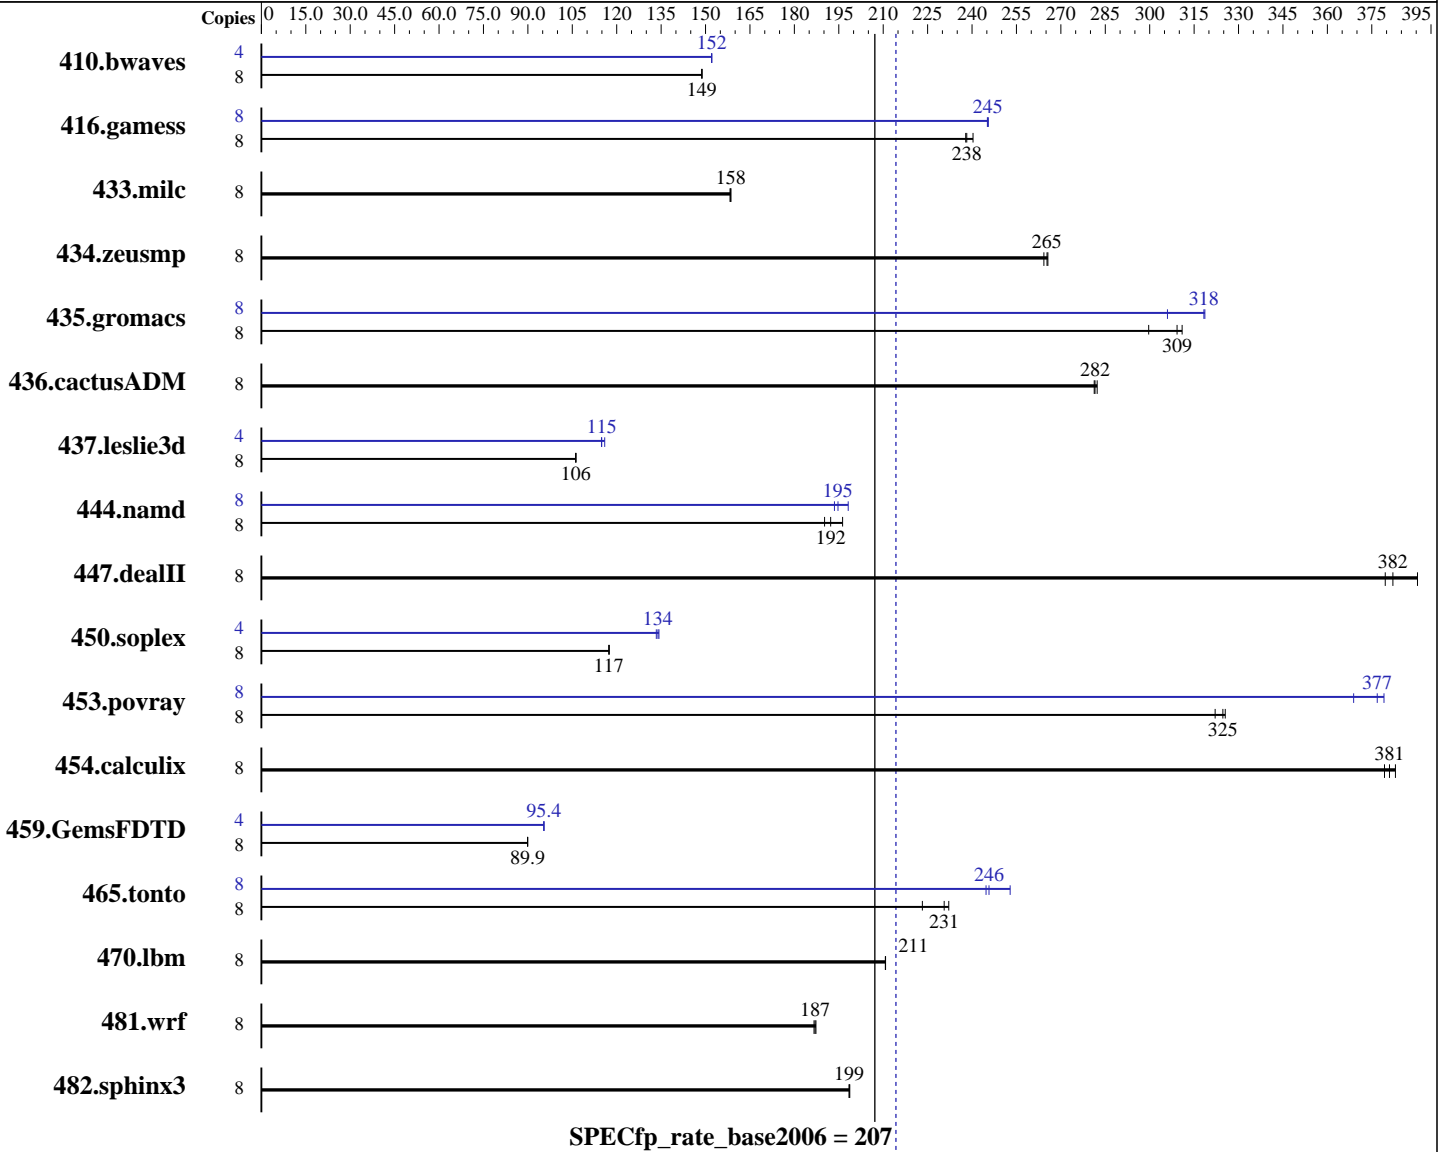

### Hardware

CPU Name: Intel Xeon E3-1280 v6  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.20 GHz  
 CPU MHz: 3900  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 214

Lenovo ThinkServer TS150  
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp\_rate\_base2006 = 207

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-U)  
Disk Subsystem: 1 x 800 GB SATA SSD  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	731	149	731	149	<u>731</u>	<u>149</u>	4	<u>357</u>	<u>152</u>	357	152	357	152
416.gamess	8	<u>658</u>	<u>238</u>	652	240	659	238	8	<u>638</u>	<u>245</u>	639	245	638	245
433.milc	8	<u>463</u>	<u>158</u>	464	158	463	159	8	<u>463</u>	<u>158</u>	464	158	463	159
434.zeusmp	8	274	266	275	264	<u>274</u>	<u>265</u>	8	274	266	275	264	<u>274</u>	<u>265</u>
435.gromacs	8	<u>185</u>	<u>309</u>	191	300	184	311	8	187	306	<u>179</u>	<u>318</u>	179	319
436.cactusADM	8	339	282	340	281	<u>340</u>	<u>282</u>	8	339	282	340	281	<u>340</u>	<u>282</u>
437.leslie3d	8	<u>708</u>	<u>106</u>	709	106	708	106	4	324	116	327	115	<u>327</u>	<u>115</u>
444.namd	8	<u>334</u>	<u>192</u>	327	196	337	190	8	<u>329</u>	<u>195</u>	332	194	324	198
447.dealII	8	241	380	234	390	<u>239</u>	<u>382</u>	8	241	380	234	390	<u>239</u>	<u>382</u>
450.soplex	8	568	117	<u>568</u>	<u>117</u>	569	117	4	250	133	<u>249</u>	<u>134</u>	248	134
453.povray	8	<u>131</u>	<u>325</u>	132	322	131	326	8	115	369	112	379	<u>113</u>	<u>377</u>
454.calculix	8	174	379	<u>173</u>	<u>381</u>	172	383	8	174	379	<u>173</u>	<u>381</u>	172	383
459.GemsFDTD	8	944	89.9	<u>944</u>	<u>89.9</u>	944	89.9	4	<u>445</u>	<u>95.4</u>	445	95.4	445	95.4
465.tonto	8	353	223	<u>341</u>	<u>231</u>	339	232	8	311	253	322	245	<u>320</u>	<u>246</u>
470.lbm	8	521	211	522	211	<u>522</u>	<u>211</u>	8	521	211	522	211	<u>522</u>	<u>211</u>
481.wrf	8	<u>478</u>	<u>187</u>	477	187	479	187	8	<u>478</u>	<u>187</u>	477	187	479	187
482.sphinx3	8	785	199	<u>785</u>	<u>199</u>	785	199	8	785	199	<u>785</u>	<u>199</u>	785	199

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 214

Lenovo ThinkServer TS150  
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp\_rate\_base2006 = 207

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

### Platform Notes

BIOS configuration:

Intel Virtualization Technology set to Enabled

VT-d set to Enabled

ICE Performance Mode set to Full Speed

Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on TS150MLK Sat Mar 18 17:34:56 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1280 v6 @ 3.90GHz

1 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 8

physical 0: cores 0 1 2 3

cache size : 8192 KB

From /proc/meminfo

MemTotal: 66040372 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 1

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION\_ID="12.1"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux TS150MLK 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015

(8d714a0) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Mar 18 10:23

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 214

Lenovo ThinkServer TS150  
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp\_rate\_base2006 = 207

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

### Platform Notes (Continued)

SPEC is set to: /home/cpu2006-1.2-ic17.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	687G	3.5G	684G	1%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS LENOVO S06KT03A 02/07/2017

Memory:

4x Samsung M378A2K43BB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
 memory using Redhat Enterprise Linux 7.2  
 runspec command invoked through numactl i.e.:  
 numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 214**

Lenovo ThinkServer TS150  
(3.90 GHz, Intel Xeon E3-1280 v6)

**SPECfp\_rate\_base2006 = 207**

**CPU2006 license:** 9017

**Test date:** Mar-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Apr-2017

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2016

## Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

Fortran benchmarks:

```

ifort -m64

```

Benchmarks using both Fortran and C:

```

icc -m64 ifort -m64

```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECfp\_rate2006 = 214

Lenovo ThinkServer TS150  
(3.90 GHz, Intel Xeon E3-1280 v6)

SPECfp\_rate\_base2006 = 207

CPU2006 license: 9017

Test date: Mar-2017

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2017

Tested by: Lenovo Group Limited

Software Availability: Sep-2016

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -fno-alias -auto-ilp32
         -qopt-mem-layout-trans=3

```

447.dealII: basepeak = yes

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -qopt-malloc-options=3
           -qopt-mem-layout-trans=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

```

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECfp\_rate2006 = 214**

Lenovo ThinkServer TS150  
(3.90 GHz, Intel Xeon E3-1280 v6)

**SPECfp\_rate\_base2006 = 207**

**CPU2006 license:** 9017

**Test date:** Mar-2017

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Apr-2017

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2016

## Peak Optimization Flags (Continued)

410.bwaves: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

416.gamess: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-`

434.zeusmp: `basepeak = yes`

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3`

Benchmarks using both Fortran and C:

435.gromacs: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Apr 4 16:57:12 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 April 2017.