



SPEC[®] CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation


Fujitsu
Fujitsu SPARC M12-2S

SPECint[®]_rate2006 = 956

SPECint_rate_base2006 = 819

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

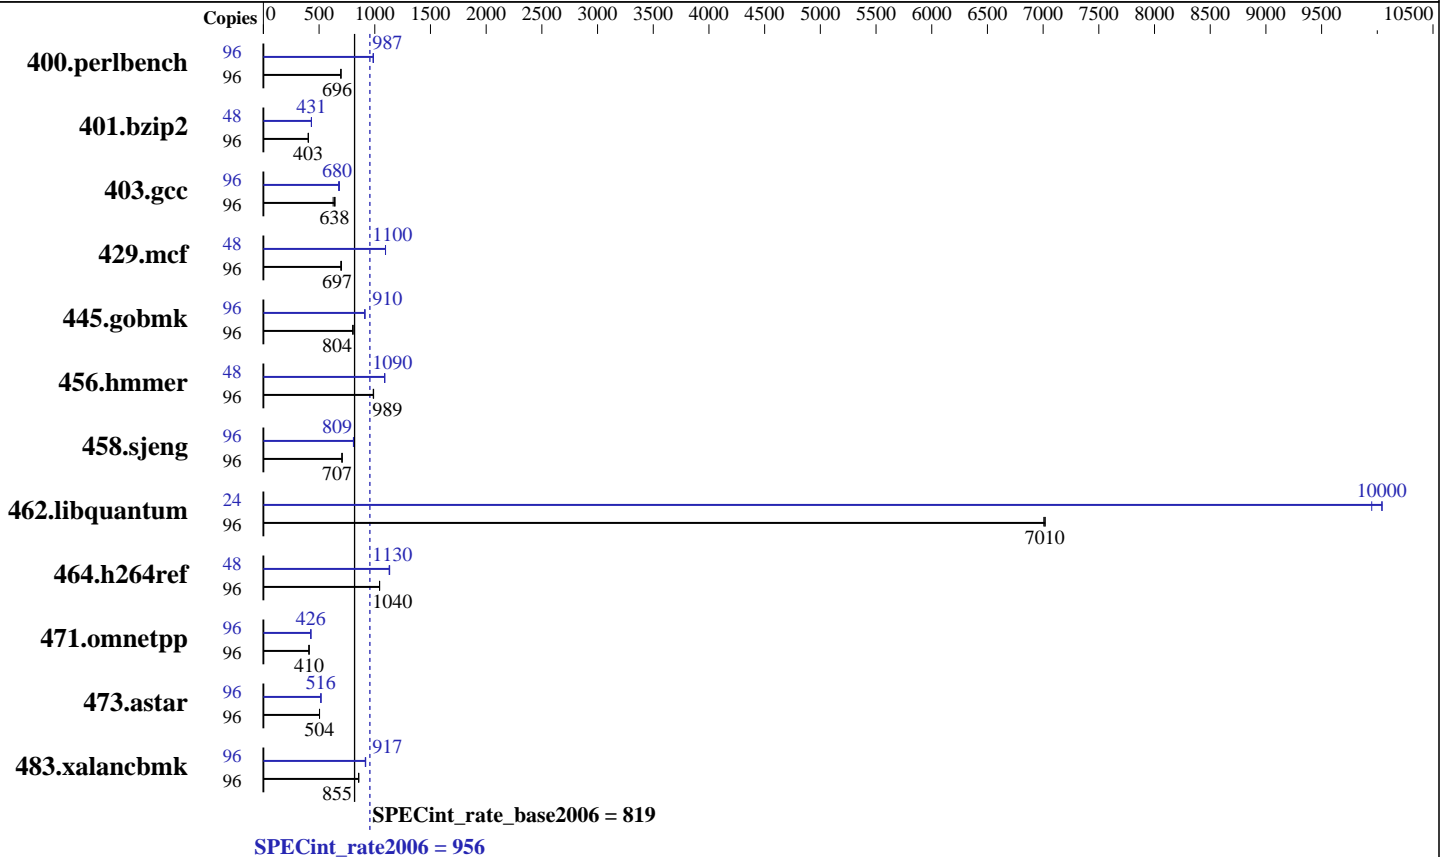

Hardware

CPU Name: SPARC64 XII
 CPU Characteristics: High Speed Mode up to 4.35 GHz
 CPU MHz: 4250
 FPU: Integrated
 CPU(s) enabled: 12 cores, 1 chip, 12 cores/chip, 8 threads/core
 CPU(s) orderable: 1 to 16 BBs; each BB contains 1 or 2 CPU chips; the number of orderable total cores is 2, 3, 4, .. 384
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 32 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 600 GB 10K RPM SAS (for system disk)
 Other Hardware: None

Software

Operating System: Oracle Solaris 11.3 (with June 2017 SRU)
 Compiler: C/C++: Version 12.6 of Oracle Developer Studio
 Auto Parallel: No
 File System: tmpfs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2S

SPECint_rate2006 = 956

SPECint_rate_base2006 = 819

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	96	1347	696	1348	696	1348	696	96	951	986	950	988	951	987		
401.bzip2	96	2296	403	2295	404	2296	403	48	1075	431	1074	431	1072	432		
403.gcc	96	1234	626	1200	644	1211	638	96	1144	676	1132	682	1137	680		
429.mcf	96	1257	697	1248	701	1257	697	48	399	1100	399	1100	399	1100		
445.gobmk	96	1253	804	1250	805	1256	802	96	1106	910	1106	910	1104	912		
456.hammer	96	906	989	908	986	905	990	48	411	1090	411	1090	412	1090		
458.sjeng	96	1648	705	1643	707	1643	707	96	1437	808	1436	809	1436	809		
462.libquantum	96	284	7010	284	7010	283	7020	24	49.5	10000	50.0	9950	49.5	10000		
464.h264ref	96	2037	1040	2037	1040	2037	1040	48	937	1130	938	1130	941	1130		
471.omnetpp	96	1464	410	1464	410	1464	410	96	1409	426	1408	426	1408	426		
473.astar	96	1337	504	1338	504	1337	504	96	1306	516	1304	517	1305	516		
483.xalancbmk	96	775	855	774	856	774	855	96	724	915	721	919	723	917		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".

System Tunables:

(/etc/system parameters)

autoup = 86400

Causes pages older than the listed number of seconds to be written by fsflush.
doiflush = 0

Controls whether file system metadata syncs will be executed during fsflush invocations.
dopageflush = 0

Controls whether memory is examined for modified pages during fsflush invocations.
zfs:zfs_arc_max=1073741824

Determines the maximum size of the ZFS Adaptive Replacement Cache (ARC).



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2S

SPECint_rate2006 = 956

SPECint_rate_base2006 = 819

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Platform Notes

Firmware Settings:
(XSCF operations)
Set High Speed Mode via XSCF command "sethsmode -s on".

Sysinfo program /export/cpu2006/config/sysinfo
Revision 6993 of 2015-11-06 (c9426fd40261140bb4c02f7d35768596)
running on H2S-253-D0 Tue Feb 28 12:28:01 2017

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /usr/sbin/psrinfo
  SPARC64-XII (chipid 0, clock 4250 MHz)
  1 chips
  96 threads
  4250 MHz
```

From kstat: 12 cores

From prtconf: 521728 Megabytes

```
/etc/release:
  Oracle Solaris 11.3 SPARC
uname -a:
  SunOS H2S-253-D0 5.11 11.3 sun4v sparcsun4v
```

SPEC is set to: /export/cpu2006

```
disk: df -h /export/cpu2006
Filesystem      Size  Used  Available Capacity  Mounted on
rpool/export    547G  9.1G    265G      4%    /export
```

(End of data from sysinfo program)

General Notes

The Building Block (BB) is just a Fujitsu SPARC M12-2S that is the basic unit to be expanded as if stacking up children's blocks.

File System:
tmpfs: output_root was used to put run directories in /tmp/cpu2006
zfs: operating system

SPEC CPU2006 benchmark:
Updated with runspec --update



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2S

SPECint_rate2006 = 956

SPECint_rate_base2006 = 819

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-std=c99 -m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=std

C++ benchmarks:
-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=compatible
-library=stlport4 -lfast

Base Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2S

SPECint_rate2006 = 956

SPECint_rate_base2006 = 819

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xtarget=sparc64xplus -xipo=1
-xalias_level=std -xrestrict -xprefetch=no%auto -xO4
-Wc,-Qiselect-funcalign=4 -xthroughput=no -lfast

401.bzip2: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xalias_level=strong -xprefetch=no%auto
-Wc,-Qiselect-funcalign=4 -Wc,-Qicache-chbab=1
-xinline_param=max_inst_hard:1000,max_inst_soft:500,max_growth:60
-lfast

403.gcc: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xO4 -xipo=2 -xprefetch=no%auto
-Wc,-Qiselect-funcalign=64
-xcache=32/128/4/4:256/128/8/4:8192/128/16/24
-xalias_level=layout

429.mcf: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xipo=2 -xalias_level=std -xprefetch=latx:0.2
-W2,-Asac -Wc,-Qiselect-funcalign=64

445.gobmk: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xO4 -xalias_level=std -xrestrict
-xprefetch=no%auto -Wc,-Qiselect-funcalign=64
-Wc,-Qgsched-T=4

456.hmmer: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xipo=1 -xunroll=8 -Wc,-Qms_pipe-pref

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 956

Fujitsu SPARC M12-2S

SPECint_rate_base2006 = 819

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Peak Optimization Flags (Continued)

456.hmmmer (continued):

-Wc,-Qiselect-funcalign=4
-xcache=32/128/4/4:256/128/8/4:8192/128/16/48

458.sjeng: -std=c99 -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xO4 -xipo=2 -xalias_level=std -xunroll=4
-Wc,-Qiselect-funcalign=4 -W2,-Afully_unroll:always=on
-xprefetch=latx:0.6 -xcheck=%none

462.libquantum: -std=c99 -m32 -fast -xtarget=sparc64xii -xpagesize=256M

-xsegment_align=256M -xthroughput -m64
-xtarget=sparc64xplus -xipo=2
-xcache=32/128/4/4:256/128/8/4:8192/128/16/24
-xinline_param=level:1 -Wc,-Qiselect-funcalign=4
-xalias_level=layout -xprefetch=latx:0.2

464.h264ref: -std=c99 -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xtarget=sparc64xplus -xipo=1
-Wc,-Qiselect-funcalign=4 -xthroughput=no
-xalias_level=layout -xprefetch=latx:0.2 -xcheck=%none

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xipo=1 -xalias_level=compatible -xunroll=2
-xprefetch_level=3 -W2,-Asac -xthroughput=no -lfast

473.astar: -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xtarget=sparc64xplus -xalias_level=compatible
-xipo=2 -xunroll=6 -xrestrict=%source
-Wc,-Qiselect-funcalign=64 -Wc,-Qgsched-T=4
-xprefetch=latx:0.3 -lfast

483.xalancbmk: -xprofile=collect:./feedback(pass 1)

-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xipo=2 -xalias_level=compatible -xdepend
-xprefetch_level=3 -xprefetch=latx:0.4 -library=stlport4
-W2,-Asac -Wc,-Qiselect-funcalign=64 -features=no%except
-lfast



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2S

SPECint_rate2006 = 956

SPECint_rate_base2006 = 819

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Feb-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Peak Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Oracle-Developer-Studio12.6.html>
<http://www.spec.org/cpu2006/flags/Fujitsu-M12-2S.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Oracle-Developer-Studio12.6.xml>
<http://www.spec.org/cpu2006/flags/Fujitsu-M12-2S.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Apr 20 09:42:32 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2017.