




SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

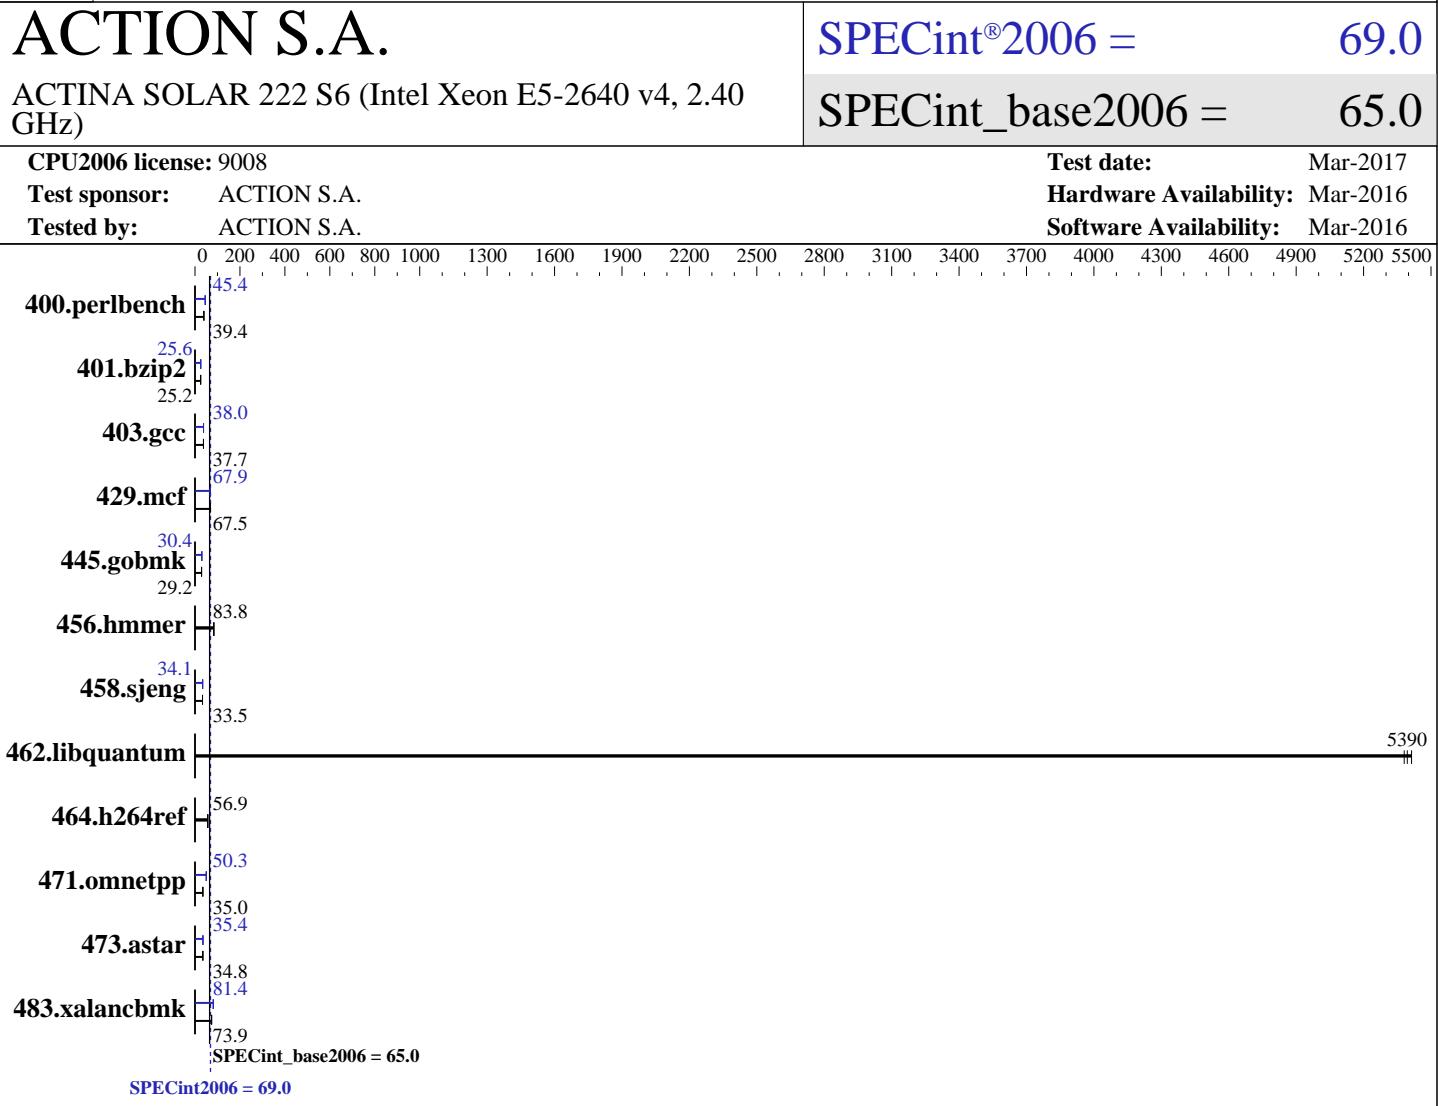

Hardware		Software
CPU Name:	Intel Xeon E5-2640 v4	Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz	3.10.0-327.18.2.el7.x86_64
CPU MHz:	2400	Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
FPU:	Integrated	Auto Parallel: Yes
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip	File System: ext4
CPU(s) orderable:	1,2 chips	System State: Run level 3 (multi-user)
Primary Cache:	32 KB I + 32 KB D on chip per core	Base Pointers: 32/64-bit
Secondary Cache:	256 KB I+D on chip per core	Peak Pointers: 32/64-bit
L3 Cache:	25 MB I+D on chip per chip	Other Software: Microquill SmartHeap V10.2
Other Cache:	None	
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)	
Disk Subsystem:	1 x 240 GB SATA II SSD	
Other Hardware:	None	



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint2006 =	69.0
ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v4, 2.40 GHz)	SPECint_base2006 =	65.0

CPU2006 license: 9008

Test date: Mar-2017

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	248	39.4	248	39.4	248	39.4	215	45.4	215	45.4	215	45.5
401.bzip2	384	25.2	384	25.1	383	25.2	378	25.6	377	25.6	378	25.5
403.gcc	214	37.7	213	37.8	214	37.7	212	38.0	212	37.9	212	38.0
429.mcf	135	67.5	135	67.6	136	67.2	135	67.8	134	67.9	134	68.2
445.gobmk	359	29.2	360	29.2	359	29.2	345	30.4	345	30.4	346	30.3
456.hmmer	112	83.6	111	83.9	111	83.8	112	83.6	111	83.9	111	83.8
458.sjeng	361	33.5	362	33.4	362	33.5	355	34.1	355	34.1	355	34.1
462.libquantum	3.83	5410	3.84	5390	3.85	5380	3.83	5410	3.84	5390	3.85	5380
464.h264ref	391	56.5	387	57.1	389	56.9	391	56.5	387	57.1	389	56.9
471.omnetpp	178	35.0	179	34.9	178	35.0	124	50.3	124	50.4	125	49.9
473.astar	201	35.0	202	34.7	202	34.8	198	35.4	198	35.4	198	35.4
483.xalancbmk	93.4	73.9	93.1	74.1	93.7	73.6	84.8	81.3	84.7	81.4	84.8	81.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Bios Settings

Hyper-Threading (All) = Disable
Power Technology = Energy Efficient
Enforce POR = Disabled
Memory Frequency = 2133
COD Enable = Disable

BMC Setting

Fan Mode = Full Speed

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on SUT Tue Mar 7 17:13:19 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECint2006 = 69.0

SPECint_base2006 = 65.0

CPU2006 license: 9008

Test date: Mar-2017

Test sponsor: ACTION S.A.

Hardware Availability: Mar-2016

Tested by: ACTION S.A.

Software Availability: Mar-2016

Platform Notes (Continued)

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2640 v4 @ 2.40GHz
        2 "physical id"s (chips)
        20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 10
    siblings   : 10
    physical 0: cores 0 1 2 3 4 8 9 10 11 12
    physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      528085180 kB
HugePages_Total:       1
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.2 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.2"
    PRETTY_NAME="Red Hat Enterprise Linux"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
os-release.rpmsave:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.0 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.0"
    PRETTY_NAME="Red Hat Enterprise Linux"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Mar 7 17:11
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda1      ext4  212G   79G  122G  40% /
Additional information from dmidecode:
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint2006 =	69.0
ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v4, 2.40 GHz)	SPECint_base2006 =	65.0
CPU2006 license: 9008	Test date:	Mar-2017
Test sponsor: ACTION S.A.	Hardware Availability:	Mar-2016
Tested by: ACTION S.A.	Software Availability:	Mar-2016

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.0 12/17/2015

Memory:

16x Hynix Semiconductor HMA84GR7AFR4N-UH 32 GB 2 rank 2400 MHz, configured at 2133 MHz

(End of data from sysinfo program)

16 modules of 32 GB were used to run the test (512 GB total)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/cpu2006.1.2/lib32:/cpu2006.1.2/lib64:/cpu2006.1.2/sh10.2"

OMP_NUM_THREADS = "20"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A. ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v4, 2.40 GHz)	SPECint2006 = 69.0 SPECint_base2006 = 65.0
CPU2006 license: 9008	Test date: Mar-2017
Test sponsor: ACTION S.A.	Hardware Availability: Mar-2016
Tested by: ACTION S.A.	Software Availability: Mar-2016

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch  
-auto-p32
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
473.astar: icpc -m64
```

Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
403.gcc: -DSPEC_CPU_LP64
```

```
429.mcf: -DSPEC_CPU_LP64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -DSPEC_CPU_LP64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint2006 =	69.0
ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v4, 2.40 GHz)	SPECint_base2006 =	65.0
CPU2006 license: 9008	Test date:	Mar-2017
Test sponsor: ACTION S.A.	Hardware Availability:	Mar-2016
Tested by: ACTION S.A.	Software Availability:	Mar-2016

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -auto-ilp32 -qopt-prefetch

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
          -qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2)

456.hmmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes
```

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
              -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -qopt-ra-region-strategy=block
              -Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
            -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
                -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint2006 =	69.0
ACTINA SOLAR 222 S6 (Intel Xeon E5-2640 v4, 2.40 GHz)	SPECint_base2006 =	65.0
CPU2006 license: 9008	Test date:	Mar-2017
Test sponsor: ACTION S.A.	Hardware Availability:	Mar-2016
Tested by: ACTION S.A.	Software Availability:	Mar-2016

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Apr 19 10:59:51 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 April 2017.