



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECfp®\_rate2006 = 207

### PowerEdge R330 (Intel Xeon E3-1240 v6, 3.70 GHz)

### SPECfp\_rate\_base2006 = 199

CPU2006 license: 55


Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

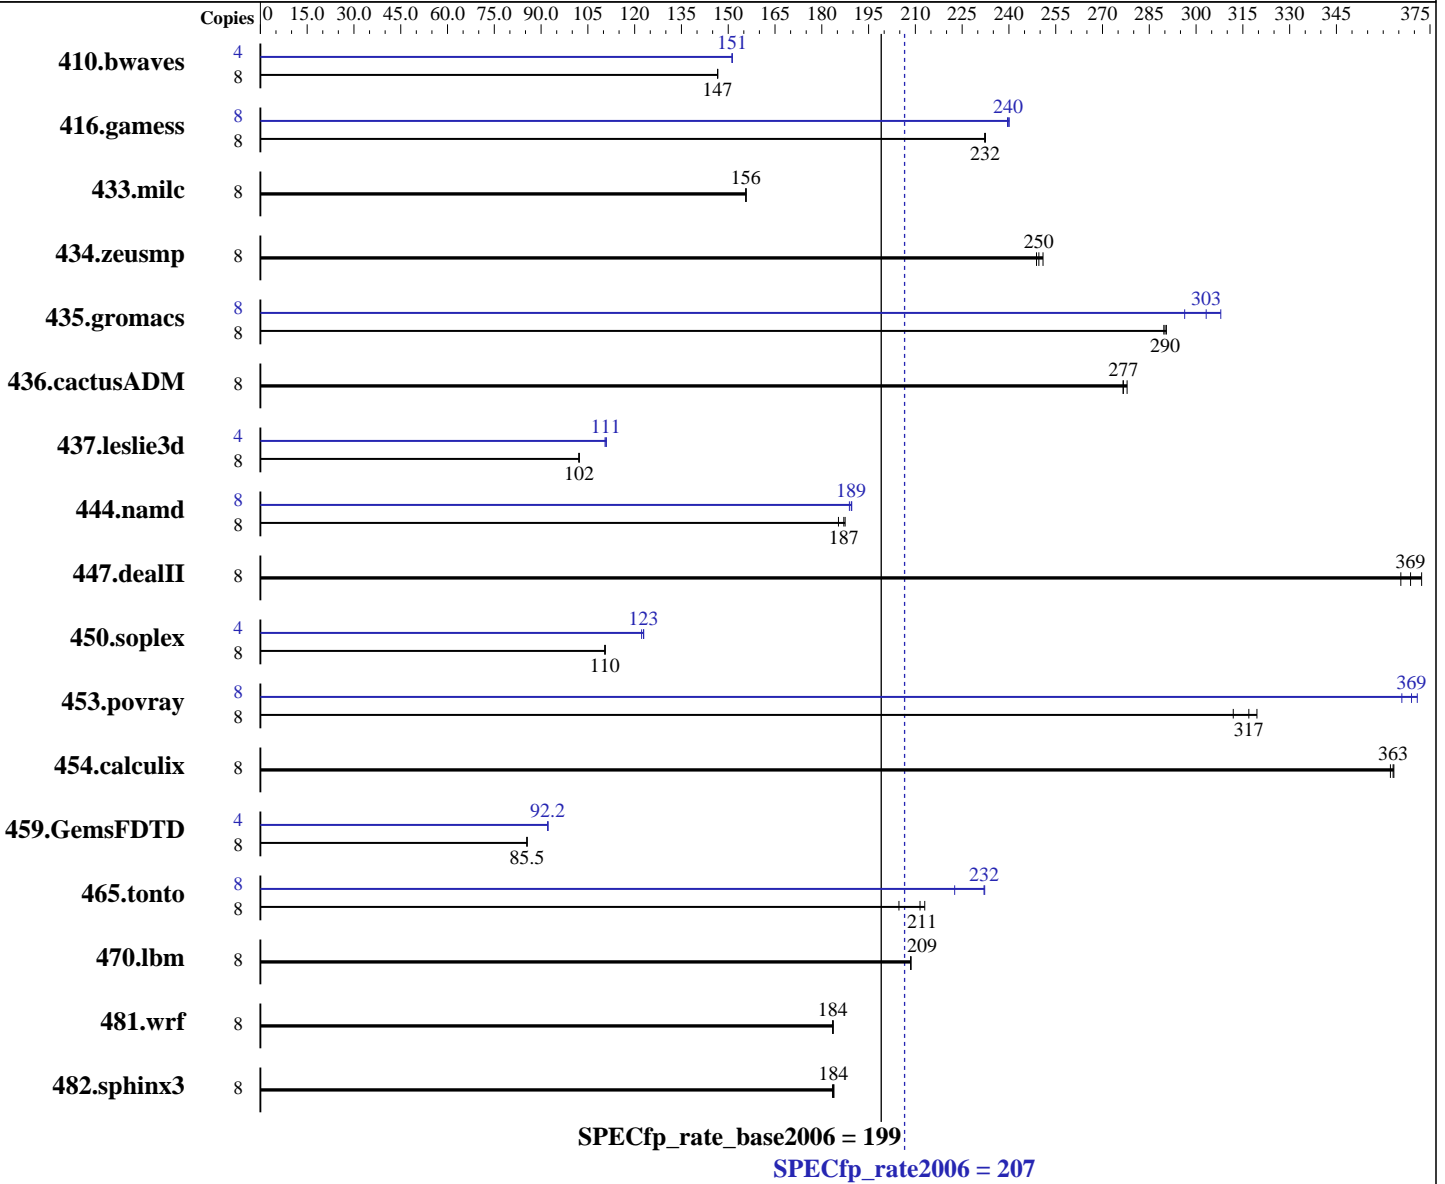

### Hardware

CPU Name: Intel Xeon E3-1240 v6  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.10 GHz  
 CPU MHz: 3700  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2  
 4.10.8-4.geb4ae7d-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran  
 Compiler for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 207

PowerEdge R330 (Intel Xeon E3-1240 v6, 3.70 GHz)

SPECfp\_rate\_base2006 = 199

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2400T-U)  
Disk Subsystem: 500 GB SATA 7200 RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	741	147	<b><u>742</u></b>	<b><u>147</u></b>	742	147	4	<b><u>359</u></b>	<b><u>151</u></b>	359	151	359	151
416.gamess	8	<b><u>674</u></b>	<b><u>232</u></b>	675	232	674	232	8	652	240	<b><u>653</u></b>	<b><u>240</u></b>	654	240
433.milc	8	<b><u>472</u></b>	<b><u>156</u></b>	471	156	472	156	8	<b><u>472</u></b>	<b><u>156</u></b>	471	156	472	156
434.zeusmp	8	<b><u>292</u></b>	<b><u>250</u></b>	293	249	290	251	8	<b><u>292</u></b>	<b><u>250</u></b>	293	249	290	251
435.gromacs	8	197	290	<b><u>197</u></b>	<b><u>290</u></b>	197	290	8	<b><u>188</u></b>	<b><u>303</u></b>	193	296	186	308
436.cactusADM	8	344	278	<b><u>346</u></b>	<b><u>277</u></b>	346	277	8	344	278	<b><u>346</u></b>	<b><u>277</u></b>	346	277
437.leslie3d	8	<b><u>736</u></b>	<b><u>102</u></b>	736	102	735	102	4	<b><u>339</u></b>	<b><u>111</u></b>	340	111	339	111
444.namd	8	346	185	342	187	<b><u>343</u></b>	<b><u>187</u></b>	8	340	189	<b><u>339</u></b>	<b><u>189</u></b>	338	190
447.dealII	8	250	366	246	372	<b><u>248</u></b>	<b><u>369</u></b>	8	250	366	246	372	<b><u>248</u></b>	<b><u>369</u></b>
450.soplex	8	603	111	<b><u>604</u></b>	<b><u>110</u></b>	604	110	4	<b><u>272</u></b>	<b><u>123</u></b>	271	123	273	122
453.povray	8	133	320	136	312	<b><u>134</u></b>	<b><u>317</u></b>	8	116	366	115	371	<b><u>115</u></b>	<b><u>369</u></b>
454.calculix	8	182	362	182	363	<b><u>182</u></b>	<b><u>363</u></b>	8	182	362	182	363	<b><u>182</u></b>	<b><u>363</u></b>
459.GemsFDTD	8	993	85.5	<b><u>993</u></b>	<b><u>85.5</u></b>	993	85.5	4	460	92.2	<b><u>461</u></b>	<b><u>92.2</u></b>	461	92.1
465.tonto	8	385	205	370	213	<b><u>372</u></b>	<b><u>211</u></b>	8	<b><u>339</u></b>	<b><u>232</u></b>	354	223	339	232
470.lbm	8	<b><u>527</u></b>	<b><u>209</u></b>	527	209	527	209	8	<b><u>527</u></b>	<b><u>209</u></b>	527	209	527	209
481.wrf	8	487	183	<b><u>487</u></b>	<b><u>184</u></b>	486	184	8	487	183	<b><u>487</u></b>	<b><u>184</u></b>	486	184
482.sphinx3	8	848	184	850	183	<b><u>848</u></b>	<b><u>184</u></b>	8	848	184	850	183	<b><u>848</u></b>	<b><u>184</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Virtualization Technology disabled  
System Profile set to Performance

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 207

PowerEdge R330 (Intel Xeon E3-1240 v6, 3.70 GHz)

SPECfp\_rate\_base2006 = 199

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

## Platform Notes (Continued)

Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-rlzd Thu Apr 13 12:54:10 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1240 v6 @ 3.70GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 4
  siblings  : 8
  physical 0: cores 0 1 2 3
  cache size : 6144 KB
```

```
From /proc/meminfo
MemTotal:      65934740 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-rlzd 4.10.8-4.geb4ae7d-default #1 SMP PREEMPT Tue Apr 4 10:46:31 UTC 2017 (eb4ae7d) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 13 05:00
```

SPEC is set to: /root/cpu2006-1.2 Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 207

PowerEdge R330 (Intel Xeon E3-1240 v6, 3.70 GHz)

SPECfp\_rate\_base2006 = 199

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	458G	13G	446G	3%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.1.3 04/07/2017

Memory:

4x 002C0000002C 18ASF2G72AZ-2G3B1 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 207

PowerEdge R330 (Intel Xeon E3-1240 v6, 3.70 GHz)

SPECfp\_rate\_base2006 = 199

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

## Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 207

PowerEdge R330 (Intel Xeon E3-1240 v6, 3.70 GHz)

SPECfp\_rate\_base2006 = 199

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
          -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
          -no-prec-div(pass 2) -fno-alias -auto-ilp32
          -qopt-mem-layout-trans=3

```

447.dealII: basepeak = yes

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -qopt-malloc-options=3
            -qopt-mem-layout-trans=3

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 207

PowerEdge R330 (Intel Xeon E3-1240 v6, 3.70 GHz)

SPECfp\_rate\_base2006 = 199

CPU2006 license: 55

Test date: Apr-2017

Test sponsor: Dell Inc.

Hardware Availability: Apr-2017

Tested by: Dell Inc.

Software Availability: Sep-2016

## Peak Optimization Flags (Continued)

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge13G-revE.xml>



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 207

PowerEdge R330 (Intel Xeon E3-1240 v6, 3.70 GHz)

SPECfp\_rate\_base2006 = 199

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Apr-2017

Hardware Availability: Apr-2017

Software Availability: Sep-2016

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue May 2 14:04:54 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 May 2017.