



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(2.50 GHz, Intel Xeon Platinum 8180)

SPECfp®_rate2006 = 1820

SPECfp_rate_base2006 = 1770

CPU2006 license: 9017


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: May-2017

Hardware Availability: Aug-2017

Software Availability: Apr-2017

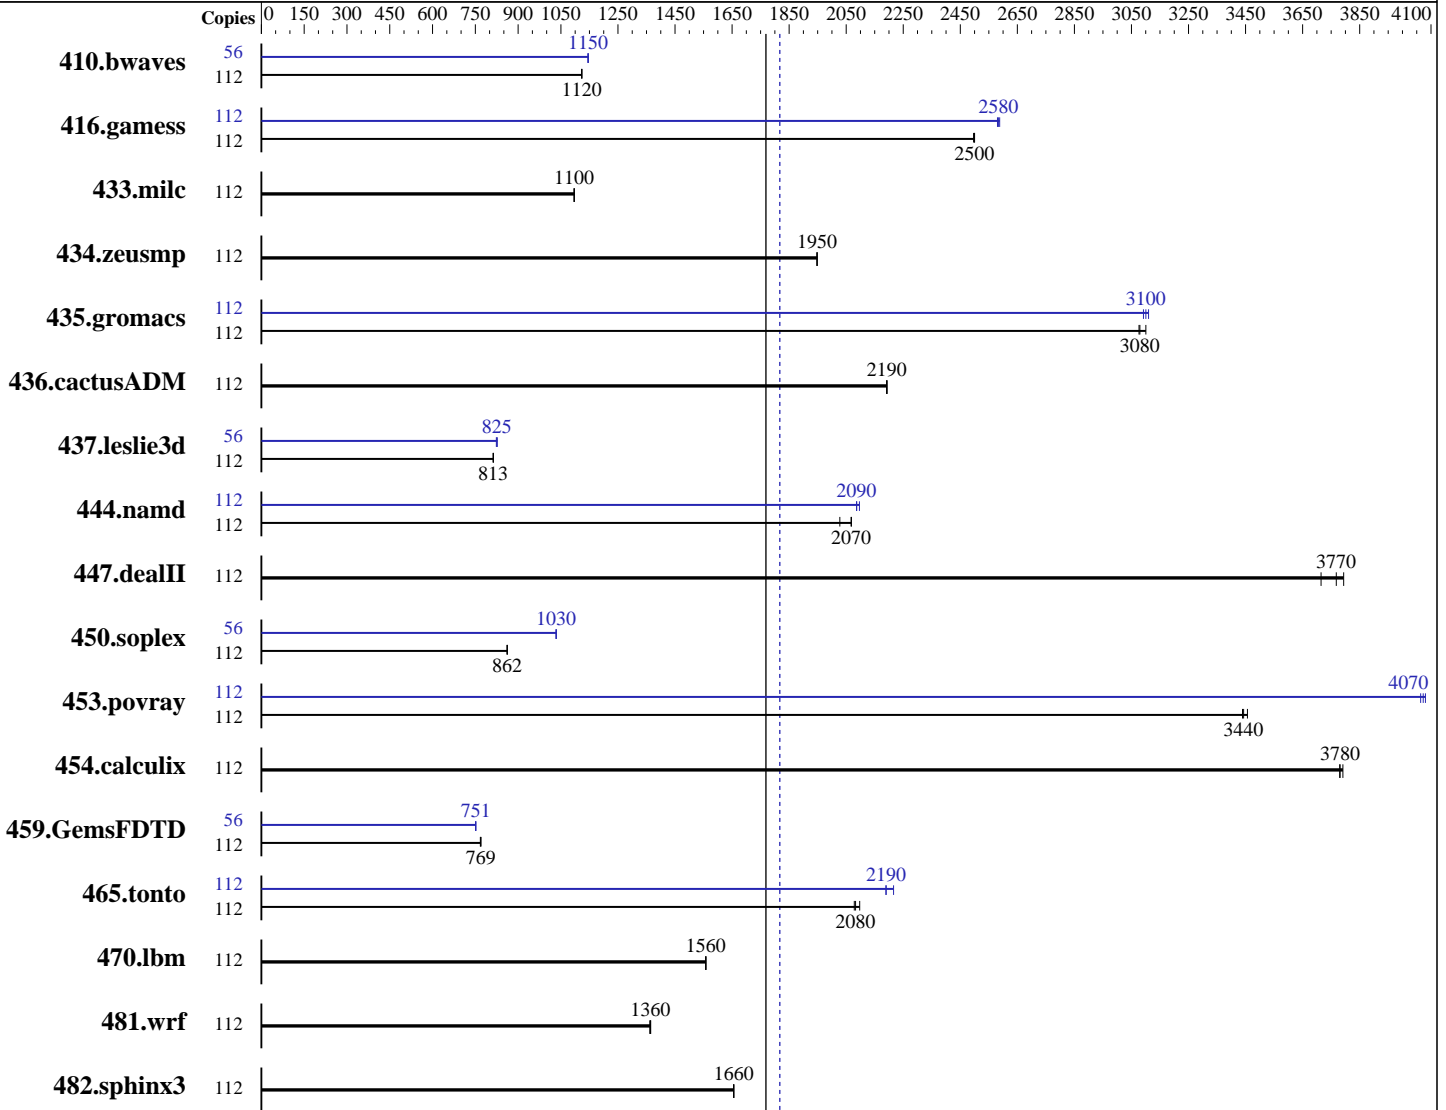

SPECfp_rate_base2006 = 1770

SPECfp_rate2006 = 1820

Hardware

CPU Name: Intel Xeon Platinum 8180
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
 Auto Parallel: Yes
 File System: btrfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1820

ThinkSystem SR650
(2.50 GHz, Intel Xeon Platinum 8180)

SPECfp_rate_base2006 = 1770

CPU2006 license: 9017

Test date: May-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 800 GB SAS SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	<u>1355</u>	<u>1120</u>	1356	1120	1355	1120	56	<u>665</u>	<u>1150</u>	664	1150	665	1150
416.gamess	112	<u>877</u>	<u>2500</u>	878	2500	877	2500	112	847	2590	850	2580	<u>849</u>	<u>2580</u>
433.milc	112	938	1100	<u>937</u>	<u>1100</u>	937	1100	112	938	1100	<u>937</u>	<u>1100</u>	937	1100
434.zeusmp	112	<u>523</u>	<u>1950</u>	523	1950	523	1950	112	<u>523</u>	<u>1950</u>	523	1950	523	1950
435.gromacs	112	<u>260</u>	<u>3080</u>	260	3080	258	3100	112	259	3090	<u>258</u>	<u>3100</u>	257	3110
436.cactusADM	112	611	2190	610	2190	<u>610</u>	<u>2190</u>	112	611	2190	610	2190	<u>610</u>	<u>2190</u>
437.leslie3d	112	1296	813	<u>1295</u>	<u>813</u>	1294	814	56	<u>638</u>	<u>825</u>	637	827	639	824
444.namd	112	434	2070	443	2030	<u>435</u>	<u>2070</u>	112	431	2090	428	2100	<u>430</u>	<u>2090</u>
447.dealII	112	<u>340</u>	<u>3770</u>	345	3710	338	3790	112	<u>340</u>	<u>3770</u>	345	3710	338	3790
450.soplex	112	1084	861	<u>1084</u>	<u>862</u>	1083	862	56	<u>452</u>	<u>1030</u>	452	1030	452	1030
453.povray	112	173	3440	172	3460	<u>173</u>	<u>3440</u>	112	147	4060	<u>146</u>	<u>4070</u>	146	4080
454.calculix	112	244	3780	244	3790	<u>244</u>	<u>3780</u>	112	244	3780	244	3790	<u>244</u>	<u>3780</u>
459.GemsFDTD	112	1548	768	1544	769	<u>1545</u>	<u>769</u>	56	<u>791</u>	<u>751</u>	790	752	791	751
465.tonto	112	525	2100	<u>529</u>	<u>2080</u>	530	2080	112	<u>503</u>	<u>2190</u>	503	2190	497	2220
470.lbm	112	<u>988</u>	<u>1560</u>	988	1560	987	1560	112	<u>988</u>	<u>1560</u>	988	1560	987	1560
481.wrf	112	919	1360	917	1360	<u>917</u>	<u>1360</u>	112	919	1360	917	1360	<u>917</u>	<u>1360</u>
482.sphinx3	112	1319	1660	<u>1318</u>	<u>1660</u>	1318	1660	112	1319	1660	<u>1318</u>	<u>1660</u>	1318	1660

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
Operating Mode set to Maximum Performance
SNC set to Enable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1820

ThinkSystem SR650
(2.50 GHz, Intel Xeon Platinum 8180)

SPECfp_rate_base2006 = 1770

CPU2006 license: 9017

Test date: May-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Platform Notes (Continued)

DCU Streamer Prefetcher set to Disable

Stale AtoS set to Enable

LLC dead line alloc set to Disable

Sysinfo program /home/cpu2006-1.2-ic17.0u3/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on Cyborg-SPECcpu2017-SUSE12SP2 Sat Jun 2 04:40:48 2018

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz

2 "physical id"s (chips)

112 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24

25 26 27 28 29 30

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24

25 26 27 28 29 30

cache size : 39424 KB

From /proc/meminfo

MemTotal: 395881264 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION_ID="12.2"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux Cyborg-SPECcpu2017-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25

10:58:20 UTC 2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 1 05:42

SPEC is set to: /home/cpu2006-1.2-ic17.0u3

Filesystem Type Size Used Avail Use% Mounted on

/dev/sdb2 btrfs 744G 96G 645G 13% /home

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1820

ThinkSystem SR650
(2.50 GHz, Intel Xeon Platinum 8180)

SPECfp_rate_base2006 = 1770

CPU2006 license: 9017

Test date: May-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE109B-1.00]- 05/05/2017

Memory:

24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0u3/lib/ia32:/home/cpu2006-1.2-ic17.0u3/lib/intel64:/home/cpu2006-1.2-ic17.0u3/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1820

ThinkSystem SR650
(2.50 GHz, Intel Xeon Platinum 8180)

SPECfp_rate_base2006 = 1770

CPU2006 license: 9017

Test date: May-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Base Portability Flags (Continued)

```

437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deall: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1820

ThinkSystem SR650
(2.50 GHz, Intel Xeon Platinum 8180)

SPECfp_rate_base2006 = 1770

CPU2006 license: 9017

Test date: May-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
         -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
         -no-prec-div(pass 2) -fno-alias -auto-ilp32
         -qopt-mem-layout-trans=3

```

447.dealII: basepeak = yes

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -qopt-malloc-options=3
           -qopt-mem-layout-trans=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
           -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECfp_rate2006 = 1820

ThinkSystem SR650
(2.50 GHz, Intel Xeon Platinum 8180)

SPECfp_rate_base2006 = 1770

CPU2006 license: 9017

Test date: May-2017

Test sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>
<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 13 12:51:01 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 July 2017.