



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECint®2006 =

78.6

SPECint_base2006 =

75.7

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

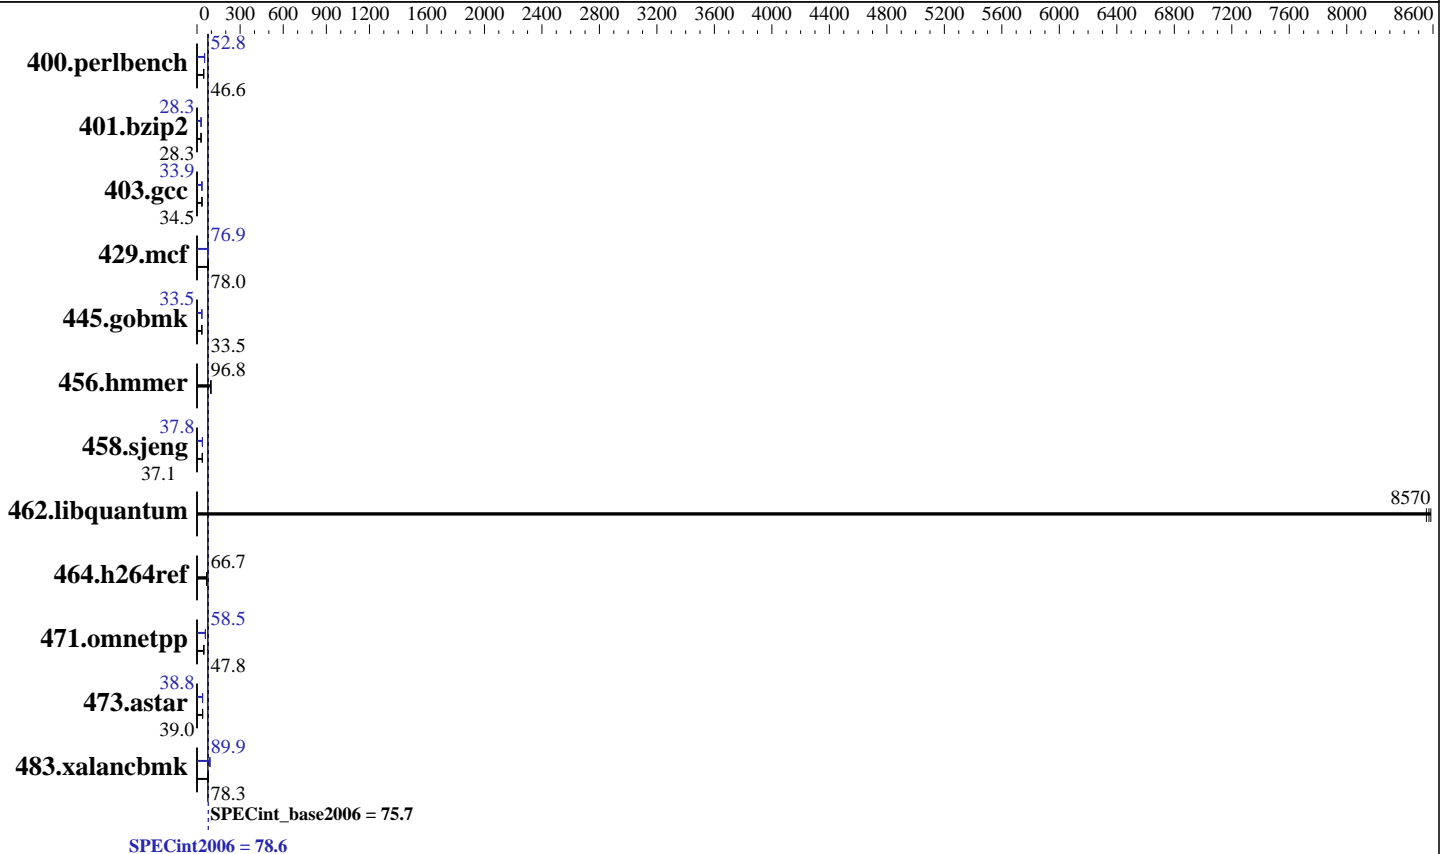

Hardware

CPU Name: Intel Xeon Platinum 8164
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 2000
FPU: Integrated
CPU(s) enabled: 52 cores, 2 chips, 26 cores/chip
CPU(s) orderable: 1,2 chip(s)
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 35.75 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem: 1 x 450 GB SATA SSD, RAID0
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
 Kernel 4.4.21-69-default
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECint2006 = 78.6

SPECint_base2006 = 75.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|--------------------|--------------------|-------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | <u>210</u> | <u>46.6</u> | 209 | 46.6 | 210 | 46.6 | 186 | 52.6 | <u>185</u> | <u>52.8</u> | 185 | 52.9 |
| 401.bzip2 | <u>341</u> | <u>28.3</u> | 342 | 28.2 | 341 | 28.3 | 342 | 28.2 | 341 | 28.3 | <u>341</u> | <u>28.3</u> |
| 403.gcc | 233 | 34.5 | 233 | 34.5 | <u>233</u> | <u>34.5</u> | 232 | 34.7 | 239 | 33.7 | <u>237</u> | <u>33.9</u> |
| 429.mcf | <u>117</u> | <u>78.0</u> | 119 | 76.6 | 117 | 78.1 | 118 | 77.3 | 120 | 76.0 | <u>119</u> | <u>76.9</u> |
| 445.gobmk | 313 | 33.5 | <u>313</u> | <u>33.5</u> | 313 | 33.5 | <u>313</u> | <u>33.5</u> | 313 | 33.6 | 313 | 33.5 |
| 456.hammer | <u>96.4</u> | <u>96.8</u> | 96.3 | 96.9 | 97.7 | 95.5 | <u>96.4</u> | <u>96.8</u> | 96.3 | 96.9 | 97.7 | 95.5 |
| 458.sjeng | 326 | 37.1 | 327 | 37.1 | <u>326</u> | <u>37.1</u> | 320 | 37.8 | <u>320</u> | <u>37.8</u> | 321 | 37.7 |
| 462.libquantum | 2.41 | 8590 | 2.42 | 8550 | <u>2.42</u> | <u>8570</u> | 2.41 | 8590 | 2.42 | 8550 | <u>2.42</u> | <u>8570</u> |
| 464.h264ref | <u>332</u> | <u>66.7</u> | 331 | 66.8 | 335 | 66.0 | <u>332</u> | <u>66.7</u> | 331 | 66.8 | 335 | 66.0 |
| 471.omnetpp | <u>131</u> | <u>47.8</u> | 135 | 46.4 | 131 | 47.8 | <u>107</u> | <u>58.5</u> | 106 | 58.7 | 107 | 58.2 |
| 473.astar | <u>180</u> | <u>39.0</u> | 180 | 39.0 | 180 | 39.1 | 181 | 38.8 | 180 | 38.9 | <u>181</u> | <u>38.8</u> |
| 483.xalancbmk | 86.7 | 79.6 | 89.8 | 76.8 | <u>88.2</u> | <u>78.3</u> | 77.3 | 89.3 | <u>76.7</u> | <u>89.9</u> | 76.6 | 90.1 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default.
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

Platform Notes

BIOS Configuration:
Hyper Threading set to Disabled
Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
XPT Prefetch set to Disabled
LLC Dead Line Allocation set to Disabled
Workload Profile set to General Peak Frequency Compute
Workload Profile set to Custom
Minimum Processor Idle Power Package C-state set to No Package State
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-kzrr Fri Jun 23 08:24:30 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10
(2.00 GHz, Intel Xeon Platinum 8164)

SPECint2006 = 78.6

SPECint_base2006 = 75.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Platform Notes (Continued)

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8164 CPU @ 2.00GHz
 2 "physical id"s (chips)
 52 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 26
  siblings  : 26
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
 26 27 28 29
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25
 26 27 28 29
cache size : 36608 KB

```

```

From /proc/meminfo
MemTotal:      197744608 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

```

uname -a:
Linux linux-kzzr 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Jun 23 08:20

```

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   331G  8.0G  323G   3% /home
Additional information from dmidecode:

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10
(2.00 GHz, Intel Xeon Platinum 8164)

SPECint2006 = 78.6

SPECint_base2006 = 75.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE I41 06/08/2017

Memory:

4x UNKNOWN NOT AVAILABLE

12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 192 GB and the dmidecode description should have one line reading as:
12x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

OMP_NUM_THREADS = "52"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -DSPEC_CPU_LP64

456.hmmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

464.h264ref: -DSPEC_CPU_LP64

471.omnetpp: -DSPEC_CPU_LP64

473.astar: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10
(2.00 GHz, Intel Xeon Platinum 8164)

SPECint2006 = 78.6

SPECint_base2006 = 75.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

C++ benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECint2006 =

78.6

SPECint_base2006 =

75.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div -auto-ilp32 -qopt-prefetch

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
 -qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
 -qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2)

456.hmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-ra-region-strategy=block
 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
 -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant BL460c Gen10

(2.00 GHz, Intel Xeon Platinum 8164)

SPECint2006 =

78.6

SPECint_base2006 =

75.7

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Sep-2017

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

483.xalanbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Fri Aug 11 13:23:32 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 August 2017.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7