



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

Synergy 680 Gen9
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3540

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

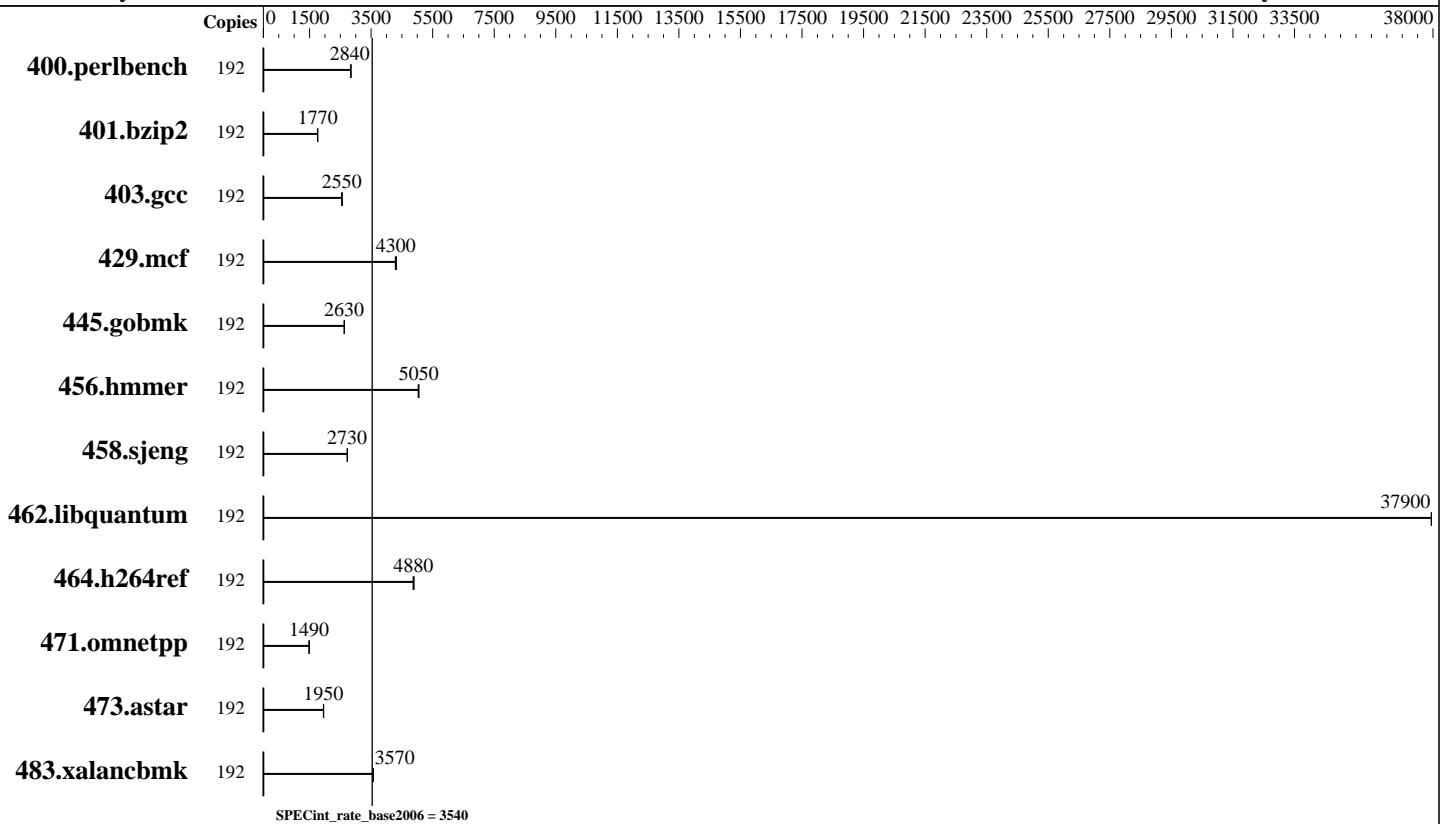

Hardware

CPU Name: Intel Xeon E7-8890 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz: 2200
FPU: Integrated
CPU(s) enabled: 96 cores, 4 chips, 24 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 60 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)
Disk Subsystem: 1 x 300 GB 15 K RPM SAS, RAID 0
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
Kernel 4.4.21-68-default
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

Synergy 680 Gen9
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3540

CPU2006 license: 3

Test date: Jun-2017

Test sponsor: HPE

Hardware Availability: Apr-2017

Tested by: HPE

Software Availability: Jul-2017

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|------------|--------------|-------------|-------------|------------|-------------|--------|---------|-------|---------|-------|---------|-------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 192 | 660 | 2840 | 660 | 2840 | 659 | 2840 | | | | | | | |
| 401.bzip2 | 192 | 1053 | 1760 | 1050 | 1770 | 1049 | 1770 | | | | | | | |
| 403.gcc | 192 | 603 | 2560 | 607 | 2550 | 607 | 2550 | | | | | | | |
| 429.mcf | 192 | 405 | 4320 | 408 | 4290 | 407 | 4300 | | | | | | | |
| 445.gobmk | 192 | 766 | 2630 | 766 | 2630 | 766 | 2630 | | | | | | | |
| 456.hmmer | 192 | 355 | 5050 | 355 | 5050 | 356 | 5030 | | | | | | | |
| 458.sjeng | 192 | 852 | 2730 | 852 | 2730 | 851 | 2730 | | | | | | | |
| 462.libquantum | 192 | 105 | 37900 | 105 | 38000 | 105 | 37900 | | | | | | | |
| 464.h264ref | 192 | 871 | 4880 | 868 | 4900 | 874 | 4860 | | | | | | | |
| 471.omnetpp | 192 | 804 | 1490 | 807 | 1490 | 809 | 1480 | | | | | | | |
| 473.astar | 192 | 691 | 1950 | 690 | 1950 | 688 | 1960 | | | | | | | |
| 483.xalancbmk | 192 | 372 | 3560 | 371 | 3570 | 372 | 3570 | | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 3 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Platform Notes

BIOS Configuration:

Power Profile set to Custom

Power Regulator to Static High Performance Mode

Minimum Processor Idle Power Core C-State set to C6 State

Minimum Processor Idle Power Package C-State set to No Package State

Energy/Performance Bias set to Maximum Performance

Collaborative Power Control set to Disabled

QPI Snoop Configuration set to Cluster on Die

Thermal Configuration set to Maximum Cooling

Processor Power and Utilization Monitoring set to Disabled

Memory Refresh Rate set to 1x Refresh

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 680 Gen9

(2.20 GHz, Intel Xeon E7-8890 v4)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3540

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Platform Notes (Continued)

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-x20e Fri Jun 16 21:02:17 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
        4 "physical id"s (chips)
        192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 24
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      528247788 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 680 Gen9

(2.20 GHz, Intel Xeon E7-8890 v4)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3540

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Platform Notes (Continued)

```
uname -a:
Linux linux-x20e 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016
(63cf368) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 16 20:53
```

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   238G   93G  145G  40% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP I40 04/05/2017

Memory:

```
64x UNKNOWN NOT AVAILABLE
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1600 MHz
```

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as: 32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1600 MHz

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

NOTE: Although compliant with all of the SPEC runrules restrictions, this result has not been formally submitted to SPEC and should therefore be considered as an estimate.

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

Synergy 680 Gen9
(2.20 GHz, Intel Xeon E7-8890 v4)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3540

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
 401.bzip2: -D_FILE_OFFSET_BITS=64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hammer: -D_FILE_OFFSET_BITS=64
 458.sjeng: -D_FILE_OFFSET_BITS=64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-HSW-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-HSW-revG.xml>



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 680 Gen9

(2.20 GHz, Intel Xeon E7-8890 v4)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 3540

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jun-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Jul 12 12:12:57 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 July 2017.