



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540M4, Intel Xeon Platinum 8180,  
2.50GHz

**SPECfp®\_rate2006 = 1820**  
**SPECfp\_rate\_base2006 = 1790**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

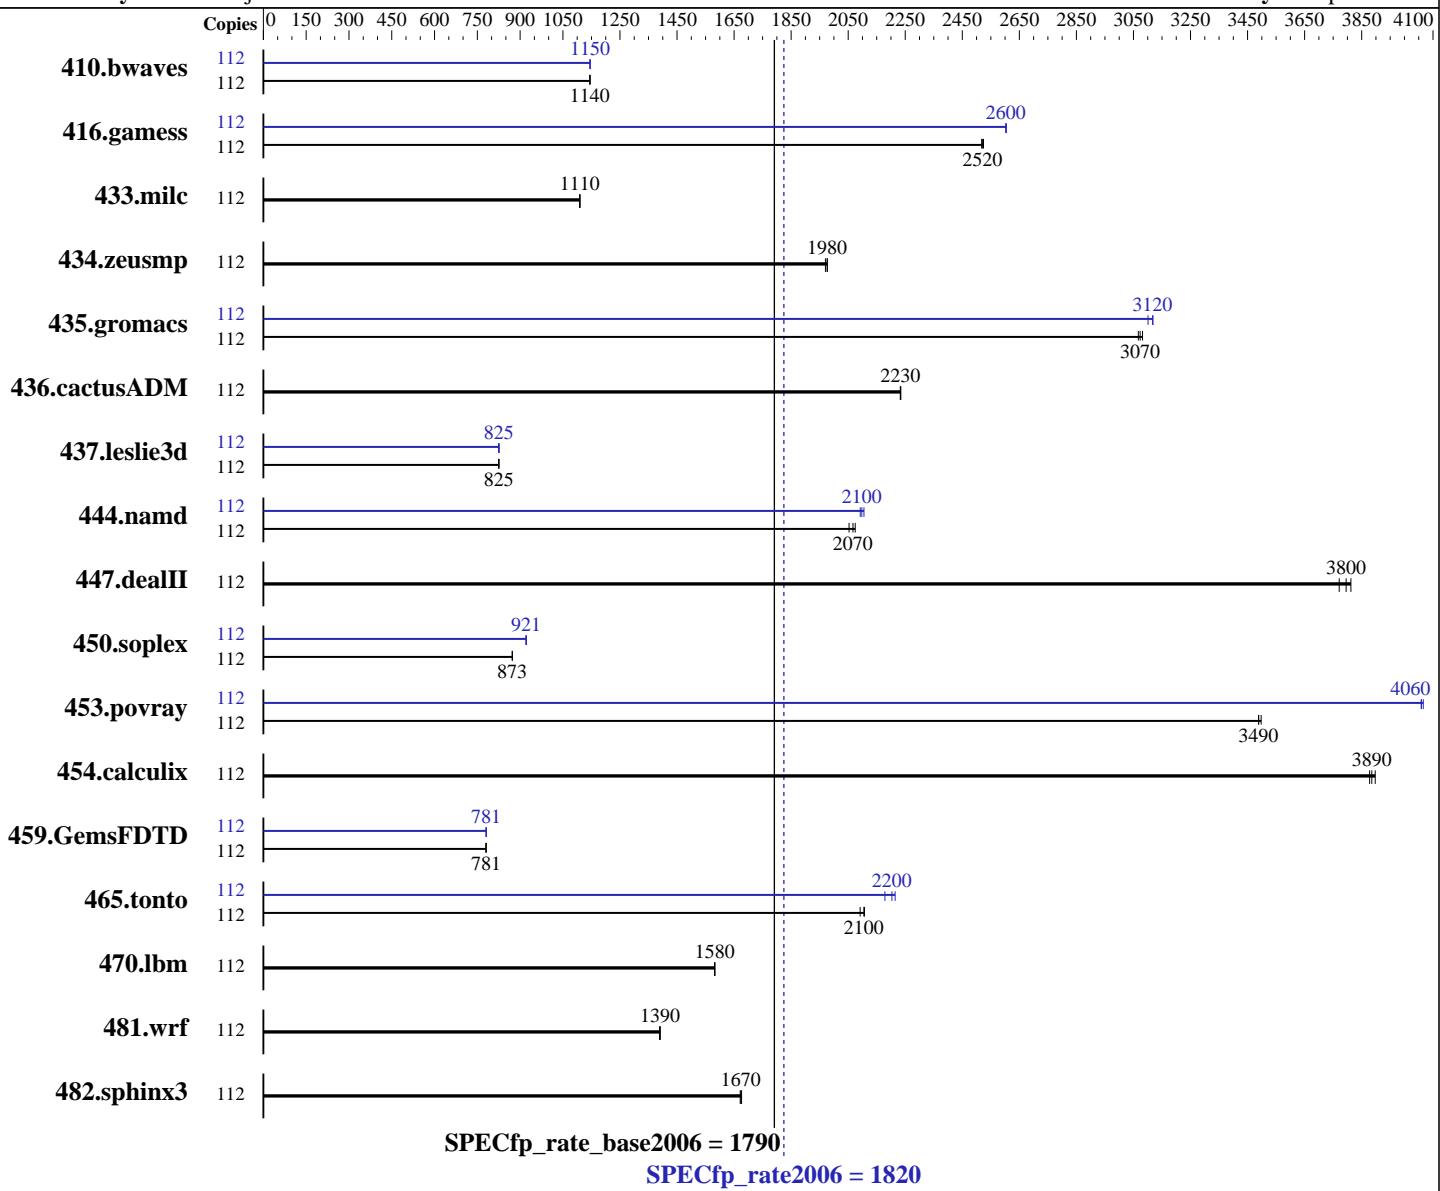

### Hardware

CPU Name: Intel Xeon Platinum 8180  
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
CPU MHz: 2500  
FPU: Integrated  
CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip, 2 threads/core  
CPU(s) orderable: 2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel:  
File System:  
System State: Yes  
tmpfs  
Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540M4, Intel Xeon Platinum 8180,  
2.50GHz

**SPECfp\_rate2006 = 1820**

**SPECfp\_rate\_base2006 = 1790**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)  
 Disk Subsystem: 752 GB tmpfs  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	<b>1330</b>	<b>1140</b>	1330	1140	1329	1150	112	1329	1150	<b>1329</b>	<b>1150</b>	1329	1150
416.gamess	112	869	2520	871	2520	<b>870</b>	<b>2520</b>	112	<b>843</b>	<b>2600</b>	842	2600	843	2600
433.milc	112	927	1110	<b>927</b>	<b>1110</b>	927	1110	112	927	1110	<b>927</b>	<b>1110</b>	927	1110
434.zeusmp	112	<b>516</b>	<b>1980</b>	516	1980	517	1970	112	<b>516</b>	<b>1980</b>	516	1980	517	1970
435.gromacs	112	<b>260</b>	<b>3070</b>	259	3080	261	3070	112	<b>257</b>	<b>3120</b>	256	3120	258	3100
436.cactusADM	112	<b>599</b>	<b>2230</b>	599	2230	599	2230	112	<b>599</b>	<b>2230</b>	599	2230	599	2230
437.leslie3d	112	1274	826	1277	824	<b>1276</b>	<b>825</b>	112	1277	824	<b>1275</b>	<b>825</b>	1274	827
444.namd	112	433	2070	<b>435</b>	<b>2070</b>	438	2050	112	427	2110	<b>428</b>	<b>2100</b>	429	2090
447.dealII	112	340	3770	<b>338</b>	<b>3800</b>	336	3810	112	340	3770	<b>338</b>	<b>3800</b>	336	3810
450.soplex	112	<b>1070</b>	<b>873</b>	1071	872	1070	873	112	1014	921	1014	921	<b>1014</b>	<b>921</b>
453.povray	112	171	3490	<b>171</b>	<b>3490</b>	170	3500	112	147	4070	147	4060	<b>147</b>	<b>4060</b>
454.calculix	112	<b>238</b>	<b>3890</b>	238	3880	237	3900	112	<b>238</b>	<b>3890</b>	238	3880	237	3900
459.GemsFDTD	112	1522	781	1523	780	<b>1522</b>	<b>781</b>	112	1522	781	<b>1522</b>	<b>781</b>	1521	781
465.tonto	112	523	2110	<b>524</b>	<b>2100</b>	527	2090	112	498	2210	<b>500</b>	<b>2200</b>	506	2180
470.lbm	112	973	1580	972	1580	<b>973</b>	<b>1580</b>	112	973	1580	972	1580	<b>973</b>	<b>1580</b>
481.wrf	112	901	1390	<b>900</b>	<b>1390</b>	899	1390	112	901	1390	<b>900</b>	<b>1390</b>	899	1390
482.sphinx3	112	<b>1304</b>	<b>1670</b>	1302	1680	1306	1670	112	<b>1304</b>	<b>1670</b>	1302	1680	1306	1670

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Kernel Boot Parameter set with : nohz\_full=1-111  
 Turbo mode set with :  
 cpupower -c all frequency-set -g performance  
 Tmpfs filesystem can be set with:  
 mkdir /home/memory  
 mount -t tmpfs -o size=752g,rw tmpfs /home/memory  
 Process tunning setting:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540M4, Intel Xeon Platinum 8180,  
2.50GHz

**SPECfp\_rate2006 = 1820**

**SPECfp\_rate\_base2006 = 1790**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Operating System Notes (Continued)

```
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

## Platform Notes

BIOS configuration:

```
Link Frequency Select = 10.4 GT/s
HWPM Support = Disabled
Intel Virtualization Technology = Disabled
Sub NUMA Clustering = Enabled
IMC Interleaving = 1-way
LLC Dead Line Alloc = Disabled
Stale AtoS = Enabled
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-11d6 Wed Jun 21 17:53:27 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
        2 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 28
        siblings : 56
        physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
        25 26 27 28 29 30
        physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
        25 26 27 28 29 30
cache size : 39424 KB
```

```
From /proc/meminfo
MemTotal:      394406240 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540M4, Intel Xeon Platinum 8180,  
2.50GHz

**SPECfp\_rate2006 = 1820**

**SPECfp\_rate\_base2006 = 1790**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
release.
# Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-11d6 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jun 21 07:12
```

```
SPEC is set to: /home/memory/speccpu
Filesystem      Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  752G  4.1G  748G  1% /home/memory
Additional information from dmidecode:
```

```
Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.4.1 for D3384-Alx
06/19/2017
Memory:
 24x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64:/home/memory/speccpu/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540M4, Intel Xeon Platinum 8180,  
2.50GHz

**SPECfp\_rate2006 = 1820**

**SPECfp\_rate\_base2006 = 1790**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Base Compiler Invocation

C benchmarks:  
`icc -m64`

C++ benchmarks:  
`icpc -m64`

Fortran benchmarks:  
`ifort -m64`

Benchmarks using both Fortran and C:  
`icc -m64 ifort -m64`

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3`

C++ benchmarks:  
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3`

Fortran benchmarks:  
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540M4, Intel Xeon Platinum 8180,  
2.50GHz

**SPECfp\_rate2006 = 1820**

**SPECfp\_rate\_base2006 = 1790**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540M4, Intel Xeon Platinum 8180,  
2.50GHz

**SPECfp\_rate2006 = 1820**

**SPECfp\_rate\_base2006 = 1790**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2540M4, Intel Xeon Platinum 8180,  
2.50GHz

**SPECfp\_rate2006 = 1820**

**SPECfp\_rate\_base2006 = 1790**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Oct 2 17:05:14 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 July 2017.