



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECint\_rate2006 = 2090**

**SPECint\_rate\_base2006 = 1990**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

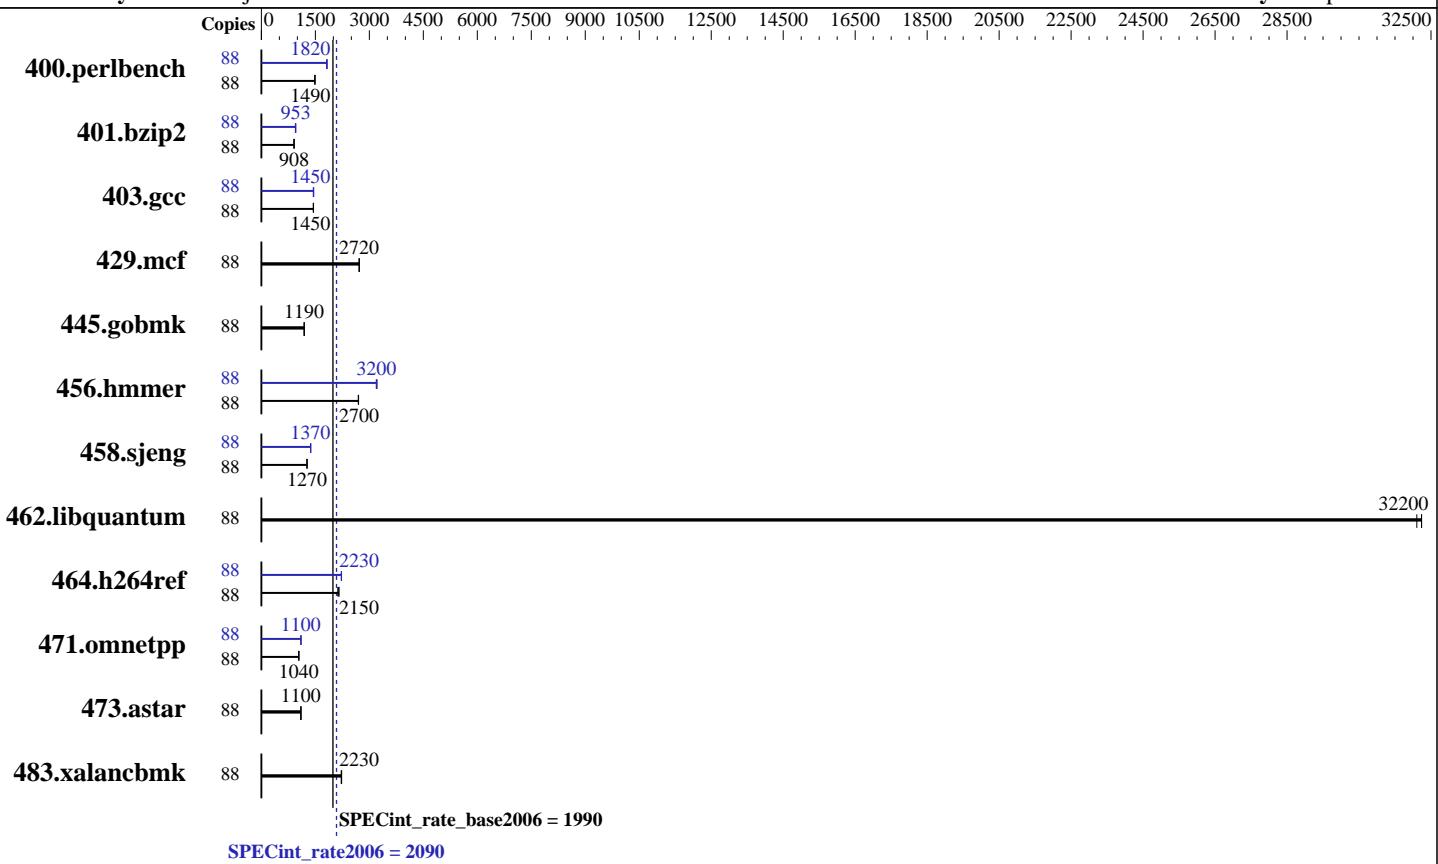

## Hardware

CPU Name:	Intel Xeon Gold 6152
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	44 cores, 2 chips, 22 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	30.25 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem:	752 GB tmpfs
Other Hardware:	None

## Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel:	Yes
File System:	tmpfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	Not Applicable
Other Software:	Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECint\_rate2006 = 2090**

**SPECint\_rate\_base2006 = 1990**

CPU2006 license: 19

Test date: Aug-2017

Test sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Apr-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	88	579	1490	577	1490	<b>578</b>	<b>1490</b>	88	475	1810	<b>471</b>	<b>1820</b>	471	1830
401.bzip2	88	932	911	940	904	<b>935</b>	<b>908</b>	88	899	944	888	956	<b>891</b>	<b>953</b>
403.gcc	88	492	1440	<b>489</b>	<b>1450</b>	489	1450	88	<b>490</b>	<b>1450</b>	490	1440	487	1460
429.mcf	88	<b>295</b>	<b>2720</b>	295	2720	295	2720	88	<b>295</b>	<b>2720</b>	295	2720	295	2720
445.gobmk	88	775	1190	<b>775</b>	<b>1190</b>	776	1190	88	775	1190	<b>775</b>	<b>1190</b>	776	1190
456.hammer	88	<b>305</b>	<b>2700</b>	305	2690	304	2700	88	257	3190	<b>257</b>	<b>3200</b>	255	3220
458.sjeng	88	<b>839</b>	<b>1270</b>	839	1270	841	1270	88	777	1370	<b>777</b>	<b>1370</b>	777	1370
462.libquantum	88	<b>56.6</b>	<b>32200</b>	56.6	32200	56.8	32100	88	<b>56.6</b>	<b>32200</b>	56.6	32200	56.8	32100
464.h264ref	88	<b>906</b>	<b>2150</b>	903	2160	917	2120	88	874	2230	<b>875</b>	<b>2230</b>	878	2220
471.omnetpp	88	530	1040	528	1040	<b>528</b>	<b>1040</b>	88	500	1100	501	1100	<b>500</b>	<b>1100</b>
473.astar	88	<b>563</b>	<b>1100</b>	563	1100	562	1100	88	<b>563</b>	<b>1100</b>	563	1100	562	1100
483.xalancbmk	88	<b>273</b>	<b>2230</b>	274	2220	272	2230	88	<b>273</b>	<b>2230</b>	274	2220	272	2230

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with : nohz\_full=1-87

Turbo mode set with :

cpupower -c all frequency-set -g performance

Tmpfs filesystem can be set with:

mkdir /home/memory

mount -t tmpfs -o size=752g,rw tmpfs /home/memory

Process tunning setting:

echo 10000000 > /proc/sys/kernel/sched\_min\_granularity\_ns

echo 15000000 > /proc/sys/kernel/sched\_wakeup\_granularity\_ns

echo 0 > /proc/sys/kernel/numa\_balancing

cpu idle state set with:

cpupower idle-set -d 1

cpupower idle-set -d 2

## Platform Notes

BIOS configuration:

Link Frequency Select = 10.4 GT/s

HWP Support = Disabled

Intel Virtualization Technology = Disabled

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECint\_rate2006 = 2090**

**SPECint\_rate\_base2006 = 1990**

**CPU2006 license:** 19

**Test date:** Aug-2017

**Test sponsor:** Fujitsu

**Hardware Availability:** Jul-2017

**Tested by:** Fujitsu

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
Sub NUMA Clustering = Enabled
IMC Interleaving = 1-way
LLC Dead Line Alloc = Disabled
Stale AtoS = Enabled
Sysinfo program /home/memory/speccpu/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-zz9i Thu Aug 3 00:58:09 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6152 CPU @ 2.10GHz
        2 "physical id"s (chips)
        88 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 22
siblings : 44
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
cache size : 30976 KB
```

```
From /proc/meminfo
MemTotal:      394407124 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECint\_rate2006 = 2090**

**SPECint\_rate\_base2006 = 1990**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
uname -a:  
Linux linux-zz9i 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016  
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Aug 3 00:04
```

```
SPEC is set to: /home/memory/speccpu  
Filesystem      Type   Size  Used Avail Use% Mounted on  
tmpfs          tmpfs   752G   4.1G  748G   1% /home/memory
```

Additional information from dmidecode:

```
Warning: Use caution when you interpret this section. The 'dmidecode' program  
reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to  
hardware, firmware, and the "DMTF SMBIOS" standard.
```

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.4.1 for D3383-A1x  
06/19/2017
```

Memory:

```
24x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64:/home/memory/speccpu/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECint\_rate2006 = 2090**

**SPECint\_rate\_base2006 = 1990**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
 401.bzip2: -D_FILE_OFFSET_BITS=64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hammer: -D_FILE_OFFSET_BITS=64
 458.sjeng: -D_FILE_OFFSET_BITS=64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hammer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECint\_rate2006 = 2090**

**SPECint\_rate\_base2006 = 1990**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Aug-2017

**Hardware Availability:** Jul-2017

**Software Availability:** Apr-2017

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
               -qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div
               -qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: basepeak = yes

456.hmmer: -xCORE-AVX512 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
               -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -unroll14 -auto-ilp32
               -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -unroll12 -qopt-mem-layout-trans=3

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX2530 M4, Intel Xeon Gold 6152,  
2.10GHz

**SPECint\_rate2006 = 2090**

**SPECint\_rate\_base2006 = 1990**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2017

Hardware Availability: Jul-2017

Software Availability: Apr-2017

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
             -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2)
             -qopt-ra-region-strategy=block
             -qopt-mem-layout-trans=3 -Wl,-z,muldefs
             -L/sh10.2 -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 13:42:47 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 September 2017.