



SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8176,
2.10GHz)

SPECfp®_rate2006 = 1700

SPECfp_rate_base2006 = 1670

CPU2006 license: 9019


Test date: Aug-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

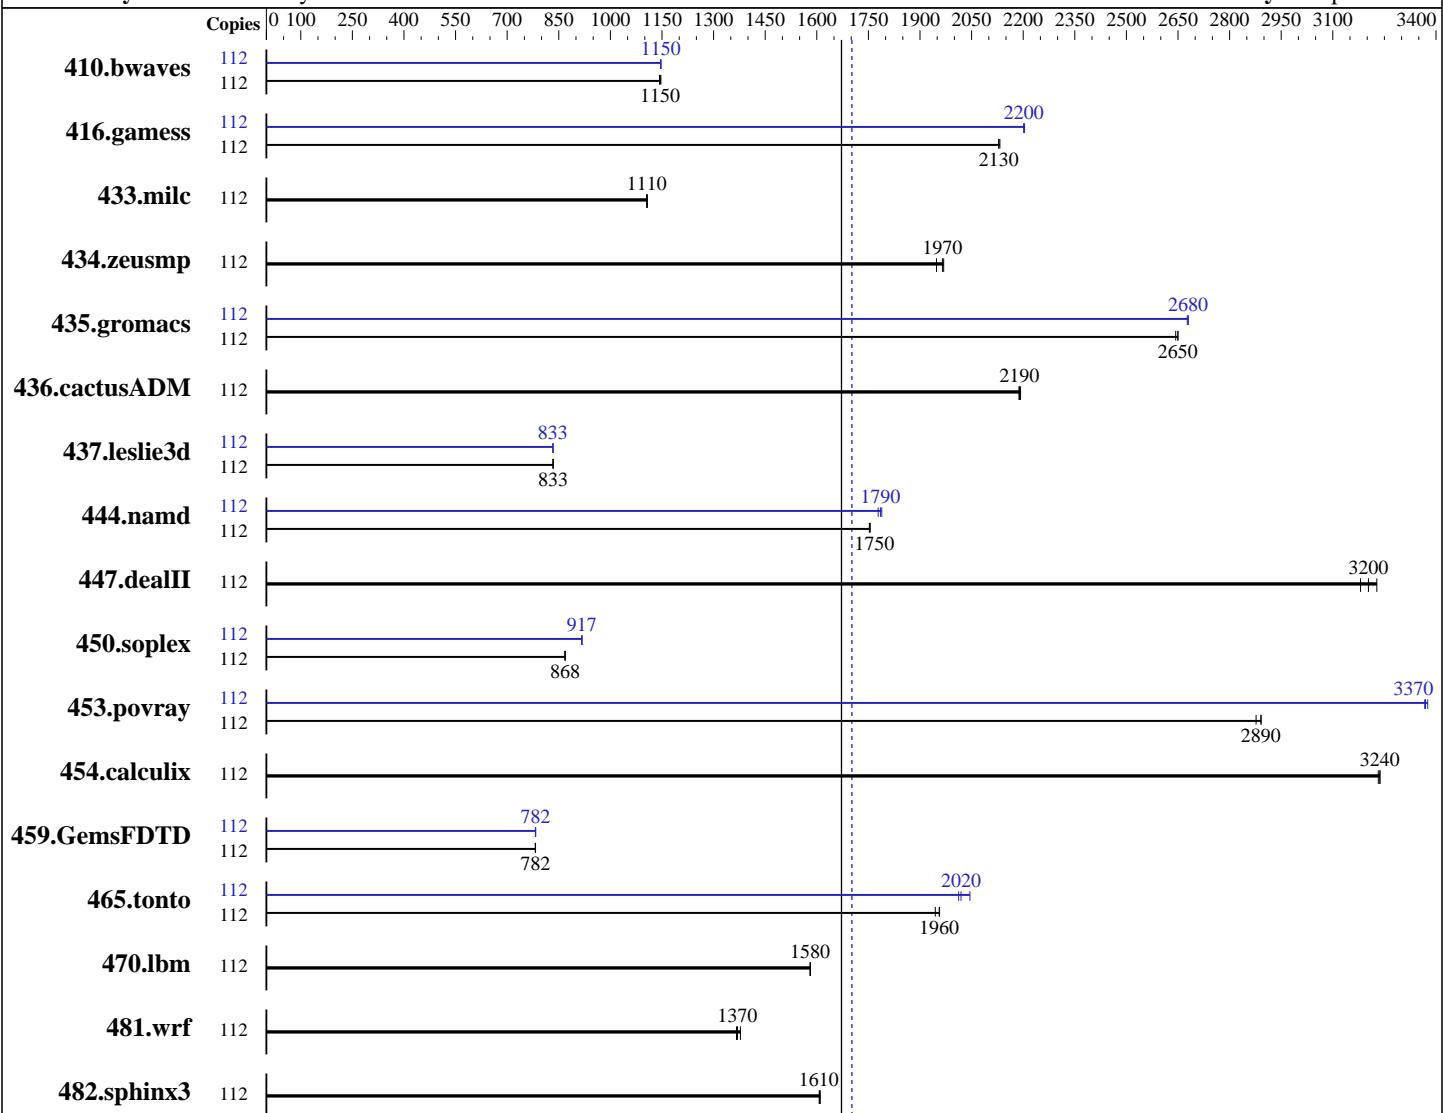

SPECfp_rate_base2006 = 1670

SPECfp_rate2006 = 1700

Hardware

CPU Name: Intel Xeon Platinum 8176
CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz: 2100
FPU: Integrated
CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 12 SP2 (x86_64)
4.4.21-69-default
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;
Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8176,
2.10GHz)

SPECfp_rate2006 = 1700

SPECfp_rate_base2006 = 1670

CPU2006 license: 9019

Test date: Aug-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
 Disk Subsystem: 1 x 600 GB SAS 10K RPM
 Other Hardware: None

Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	112	1329	1150	1332	1140	1327	1150	112	1328	1150	1327	1150	1327	1150
416.gamess	112	1028	2130	1030	2130	1030	2130	112	995	2200	996	2200	996	2200
433.milc	112	930	1110	930	1110	928	1110	112	930	1110	930	1110	928	1110
434.zeusmp	112	523	1950	518	1970	519	1970	112	523	1950	518	1970	519	1970
435.gromacs	112	303	2640	302	2650	302	2650	112	299	2680	298	2680	298	2680
436.cactusADM	112	611	2190	610	2190	612	2190	112	611	2190	610	2190	612	2190
437.leslie3d	112	1263	833	1263	833	1263	833	112	1264	833	1264	833	1263	833
444.namd	112	512	1750	512	1760	512	1750	112	502	1790	503	1790	505	1780
447.dealII	112	403	3180	400	3200	397	3230	112	403	3180	400	3200	397	3230
450.soplex	112	1077	868	1076	868	1075	869	112	1018	918	1019	917	1019	917
453.povray	112	207	2880	206	2890	206	2890	112	177	3370	177	3370	176	3380
454.calculix	112	285	3240	285	3240	286	3230	112	285	3240	285	3240	286	3230
459.GemsFDTD	112	1519	782	1520	782	1519	782	112	1520	782	1519	782	1518	783
465.tonto	112	563	1960	564	1960	567	1940	112	548	2010	546	2020	539	2050
470.lbm	112	973	1580	974	1580	973	1580	112	973	1580	974	1580	973	1580
481.wrf	112	908	1380	915	1370	914	1370	112	908	1380	915	1370	914	1370
482.sphinx3	112	1358	1610	1356	1610	1358	1610	112	1358	1610	1356	1610	1358	1610

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 Intel HyperThreading Technology set to Enabled
 CPU performance set to Enterprise

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8176,
2.10GHz)

SPECfp_rate2006 = 1700

SPECfp_rate_base2006 = 1670

CPU2006 license: 9019

Test date: Aug-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

Platform Notes (Continued)

Power Performance Tuning set to OS

SNC set to Enabled

IMC Interleaving set to 1-way Interleave

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-djj4 Fri Jan 1 22:12:09 2010

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
        2 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 28
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
25 26 27 28 29 30
cache size : 39424 KB
```

```
From /proc/meminfo
MemTotal:      394666684 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-djj4 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
Continued on next page
```



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8176,
2.10GHz)

SPECfp_rate2006 = 1700

SPECfp_rate_base2006 = 1670

CPU2006 license: 9019

Test date: Aug-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

Platform Notes (Continued)

run-level 3 Dec 31 19:05

```
SPEC is set to: /home/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        xfs   559G  32G  528G   6% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Cisco Systems, Inc. B200M5.3.2.1d.5.0727171353 07/27/2017
Memory:
 24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8176,
2.10GHz)

SPECfp_rate2006 = 1700

SPECfp_rate_base2006 = 1670

CPU2006 license: 9019

Test date: Aug-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-qopt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8176,
2.10GHz)

SPECfp_rate2006 = 1700

SPECfp_rate_base2006 = 1670

CPU2006 license: 9019

Test date: Aug-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
    450.soplex: -D_FILE_OFFSET_BITS=64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
    -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
    -no-prec-div(pass 2) -fno-alias -auto-ilp32
    -qopt-mem-layout-trans=3

```

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8176,
2.10GHz)

SPECfp_rate2006 = 1700

SPECfp_rate_base2006 = 1670

CPU2006 license: 9019

Test date: Aug-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-malloc-options=3
 -qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll4 -auto -inline-calloc
 -qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32
 -qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Platinum 8176,
2.10GHz)

SPECfp_rate2006 = 1700

SPECfp_rate_base2006 = 1670

CPU2006 license: 9019

Test date: Aug-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Apr-2017

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Sep 20 11:06:44 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2017.