



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint®_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8870 v4)

SPECint_rate_base2006 = 5880

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2017

Hardware Availability: Jan-2016

Software Availability: Dec-2015

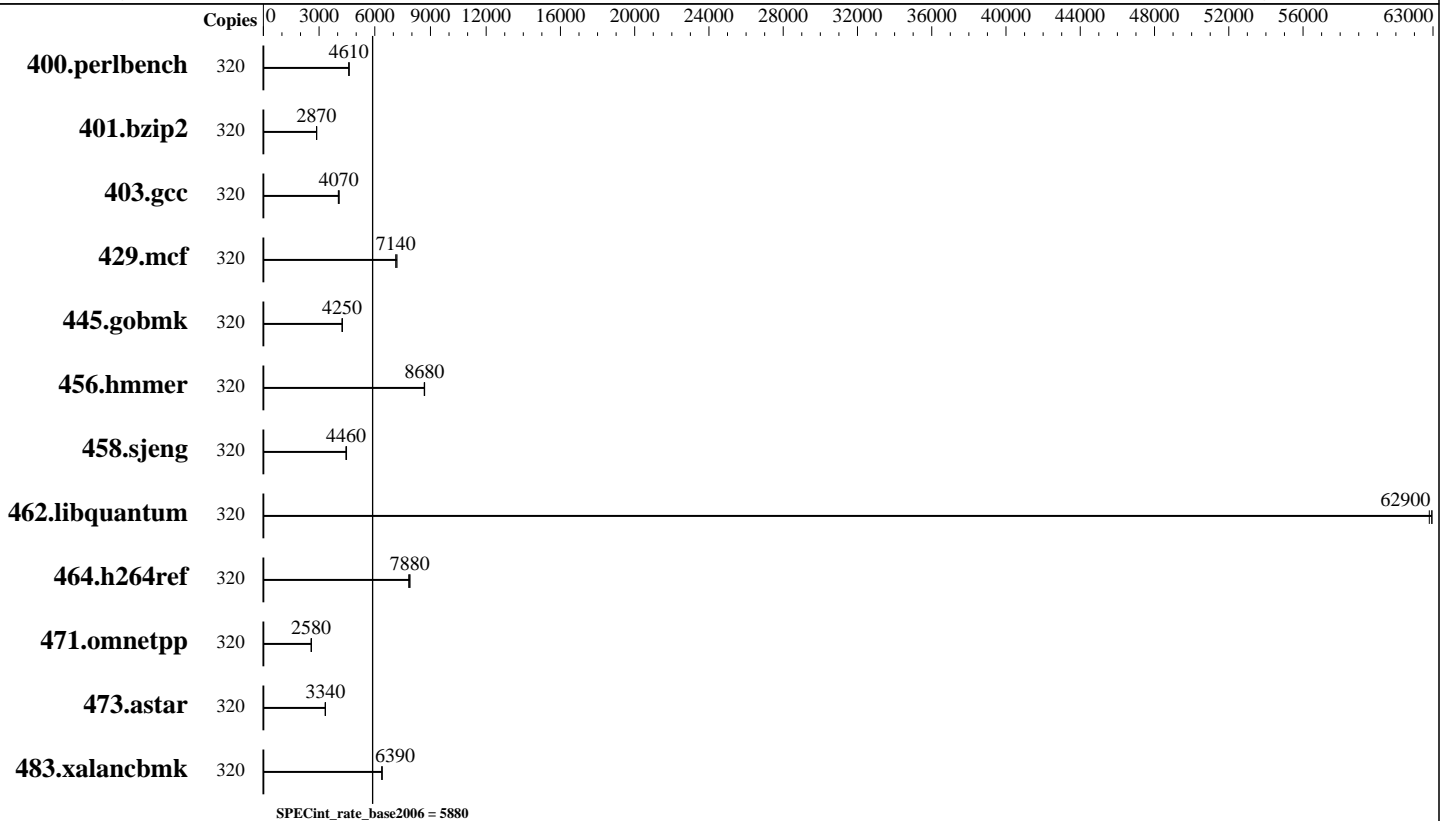

Hardware

CPU Name: Intel Xeon E7-8870 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 160 cores, 8 chips, 20 cores/chip, 2 threads/core
 CPU(s) orderable: 4,8 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 50 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1
 Kernel 3.12.49-11-default
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8870 v4)

SPECint_rate_base2006 = 5880

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2017

Hardware Availability: Jan-2016

Software Availability: Dec-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	320	678	4610	678	4610	678	4610							
401.bzip2	320	1077	2870	1078	2860	1076	2870							
403.gcc	320	634	4070	632	4080	638	4040							
429.mcf	320	409	7140	405	7200	409	7140							
445.gobmk	320	788	4260	792	4240	790	4250							
456.hammer	320	344	8680	345	8660	344	8680							
458.sjeng	320	864	4480	870	4450	868	4460							
462.libquantum	320	106	62800	105	62900	105	62900							
464.h264ref	320	905	7830	899	7880	897	7890							
471.omnetpp	320	775	2580	775	2580	774	2590							
473.astar	320	674	3330	673	3340	672	3340							
483.xalancbmk	320	346	6390	345	6390	346	6380							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Turbo mode set with:
cpupower -c all frequency-set -g performance

Platform Notes

BIOS configuration:
Set Power Efficiency Mode to Performance
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /home/spec/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 # \$ e3fbb8667b5a285932ceab81e28219e1
running on linux-v9m3 Fri Mar 31 19:31:57 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7-8870 v4 @ 2.10GHz
8 "physical id"s (chips)
320 "processors"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8870 v4)

SPECint_rate_base2006 = 5880

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2017

Hardware Availability: Jan-2016

Software Availability: Dec-2015

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 20
siblings  : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 4: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 5: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 6: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 7: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
cache size : 51200 KB

```

From /proc/meminfo

```

MemTotal:      1058283148 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.

```

os-release:

```

NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"

```

```

sgi-accelerate-release: SGI Accelerate 1.12, Build
714r18.sles12sp1-1604041900

```

uname -a:

```

Linux linux-v9m3 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 5 Mar 31 19:24

SPEC is set to: /home/spec

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   1.1T  562G  512G  53% /home

```

Additional information from dmidecode:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8870 v4)

SPECint_rate_base2006 = 5880

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2017

Hardware Availability: Jan-2016

Software Availability: Dec-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 5.11 02/21/2017

Memory:

128x NO DIMM NO DIMM

64x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/spec/libs/32:/home/spec/libs/64:/home/spec/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32

401.bzip2: -D_FILE_OFFSET_BITS=64

403.gcc: -D_FILE_OFFSET_BITS=64

429.mcf: -D_FILE_OFFSET_BITS=64

445.gobmk: -D_FILE_OFFSET_BITS=64

456.hmmer: -D_FILE_OFFSET_BITS=64

458.sjeng: -D_FILE_OFFSET_BITS=64

462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

464.h264ref: -D_FILE_OFFSET_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8870 v4)

SPECint_rate_base2006 = 5880

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Apr-2017

Hardware Availability: Jan-2016

Software Availability: Dec-2015

Base Portability Flags (Continued)

471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.20170404.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.20170404.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 4 12:40:03 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 October 2017.