SPEC® CINT2006 Result

Huawei

SPECint®_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8891 v4)

SPECint_rate_base2006 = 4170

CPU2006 license:	3175	**Test date:**	Apr-2017
Test sponsor:	Huawei	**Hardware Availability:**	Jan-2016
Tested by:	Huawei	**Software Availability:**	Dec-2015

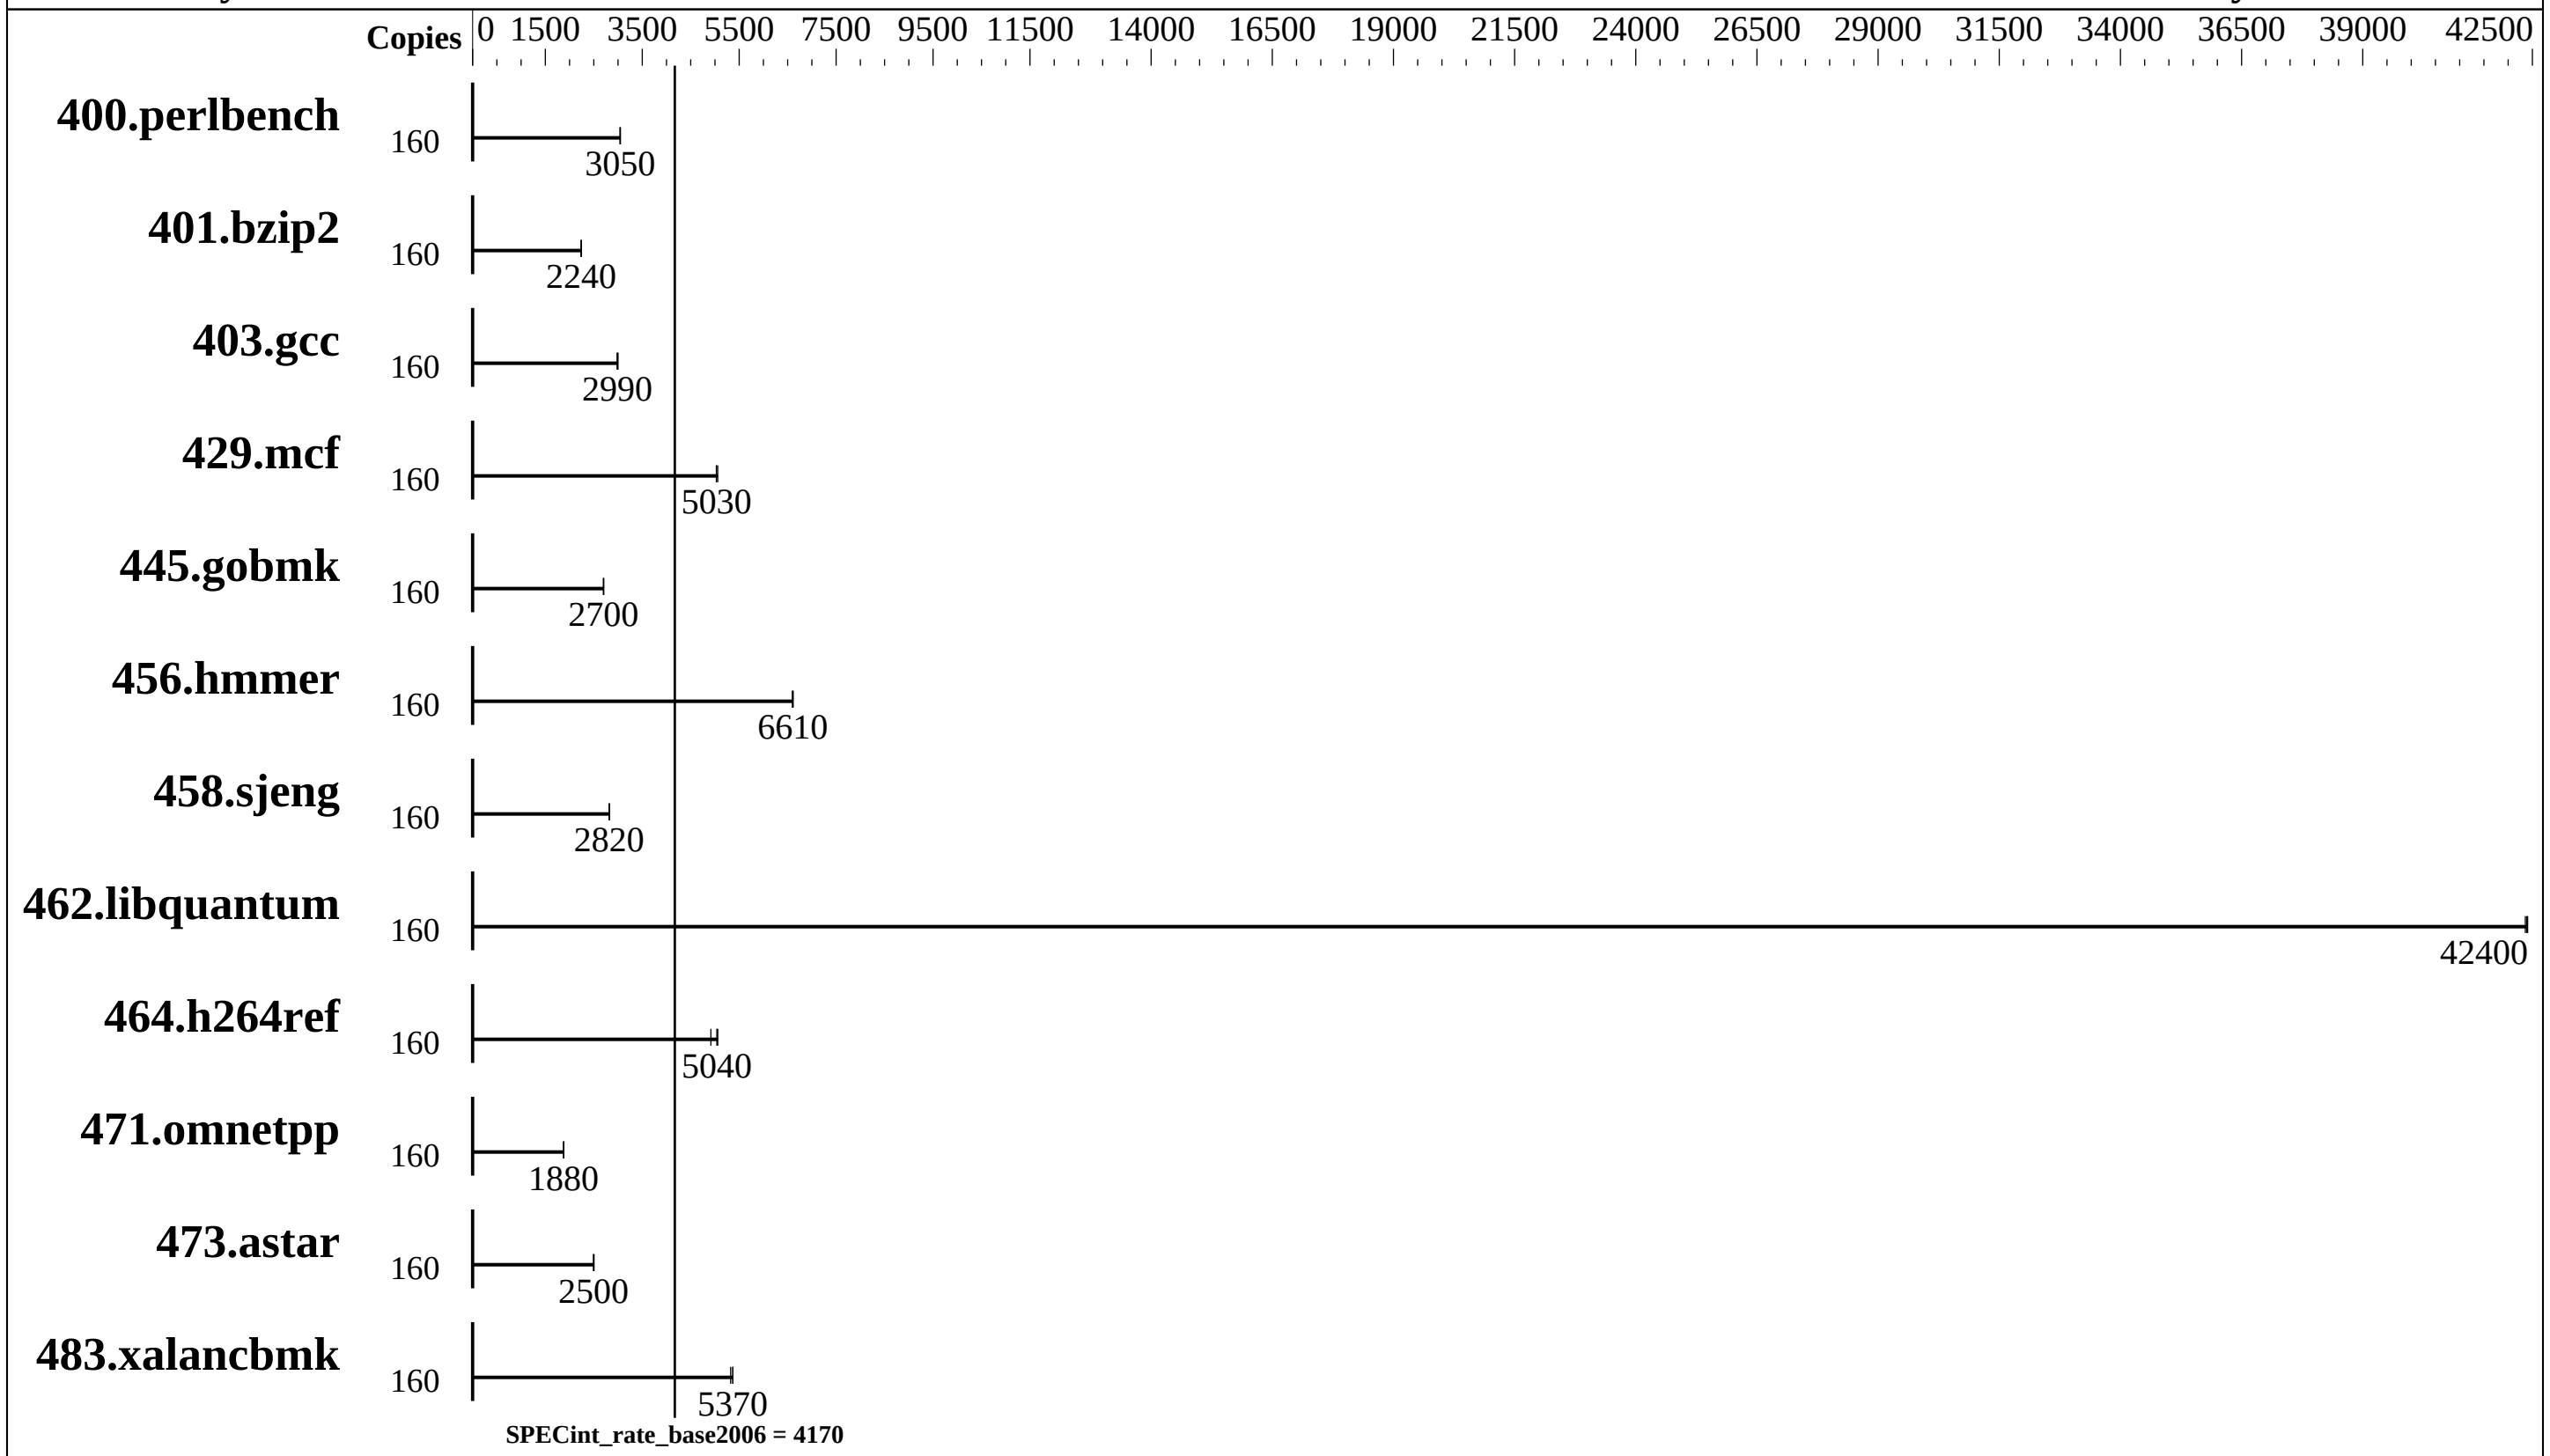

Hardware

CPU Name:	Intel Xeon E7-8891 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	80 cores, 8 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	4,8 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	60 MB I+D on chip per chip
Other Cache:	None
Memory:	1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem:	2 x 600 GB SAS, 10K RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP1 Kernel 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Huawei

Kunlun 9008 (Intel Xeon E7-8891 v4)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 4170

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Apr-2017
Hardware Availability: Jan-2016
Software Availability: Dec-2015

Results Table

	Base							Peak						
Benchmark	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	160	514	3040	**513**	**3050**	513	3050							
401.bzip2	160	**689**	**2240**	690	2240	688	2240							
403.gcc	160	429	3000	432	2980	**431**	**2990**							
429.mcf	160	**290**	**5030**	289	5060	290	5030							
445.gobmk	160	**621**	**2700**	621	2700	622	2700							
456.hmmer	160	**226**	**6610**	226	6600	226	6610							
458.sjeng	160	687	2820	687	2820	**687**	**2820**							
462.libquantum	160	78.2	42400	78.3	42400	**78.2**	**42400**							
464.h264ref	160	**703**	**5040**	700	5060	720	4920							
471.omnetpp	160	532	1880	532	1880	**532**	**1880**							
473.astar	160	**450**	**2500**	448	2500	450	2500							
483.xalancbmk	160	206	5370	207	5320	**206**	**5370**							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Turbo mode set with:
 cpupower -c all frequency-set -g performance
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-ew80 Thu Mar 30 22:03:11 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-8891 v4 @ 2.80GHz
      8 "physical id"s (chips)
      160 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 10
         siblings  : 20
         physical 0: cores 5 9 10 11 13 18 24 26 28 29
         physical 1: cores 5 9 10 11 13 18 24 26 28 29
         physical 2: cores 5 9 10 11 13 18 24 26 28 29
         physical 3: cores 5 9 10 11 13 18 24 26 28 29
         physical 4: cores 5 9 10 11 13 18 24 26 28 29
         physical 5: cores 5 9 10 11 13 18 24 26 28 29
         physical 6: cores 5 9 10 11 13 18 24 26 28 29
         physical 7: cores 5 9 10 11 13 18 24 26 28 29
      cache size : 61440 KB

   From /proc/meminfo
      MemTotal:       1058050152 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      SUSE Linux Enterprise Server 12 SP1

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 12 (x86_64)
         VERSION = 12
         PATCHLEVEL = 1
         # This file is deprecated and will be removed in a future service pack or
         release.
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12-SP1"
         VERSION_ID="12.1"
         PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12:sp1"

   uname -a:
      Linux linux-ew80 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
      (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

   run-level 5 Mar 30 22:01

   SPEC is set to: /spec
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda3      ext4  1.1T   27G  1.1T   3% /
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
```

Continued on next page

Platform Notes (Continued)

```
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. 5.11 02/21/2017
    Memory:
     64x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1600 MHz
     128x NO DIMM NO DIMM

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64

Continued on next page

Base Portability Flags (Continued)

483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.20170404.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.20170404.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Oct 4 12:40:03 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 October 2017.