



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8893 v4)

SPECint_rate_base2006 = 1880

CPU2006 license: 3175


Test date: Apr-2017

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Dec-2015

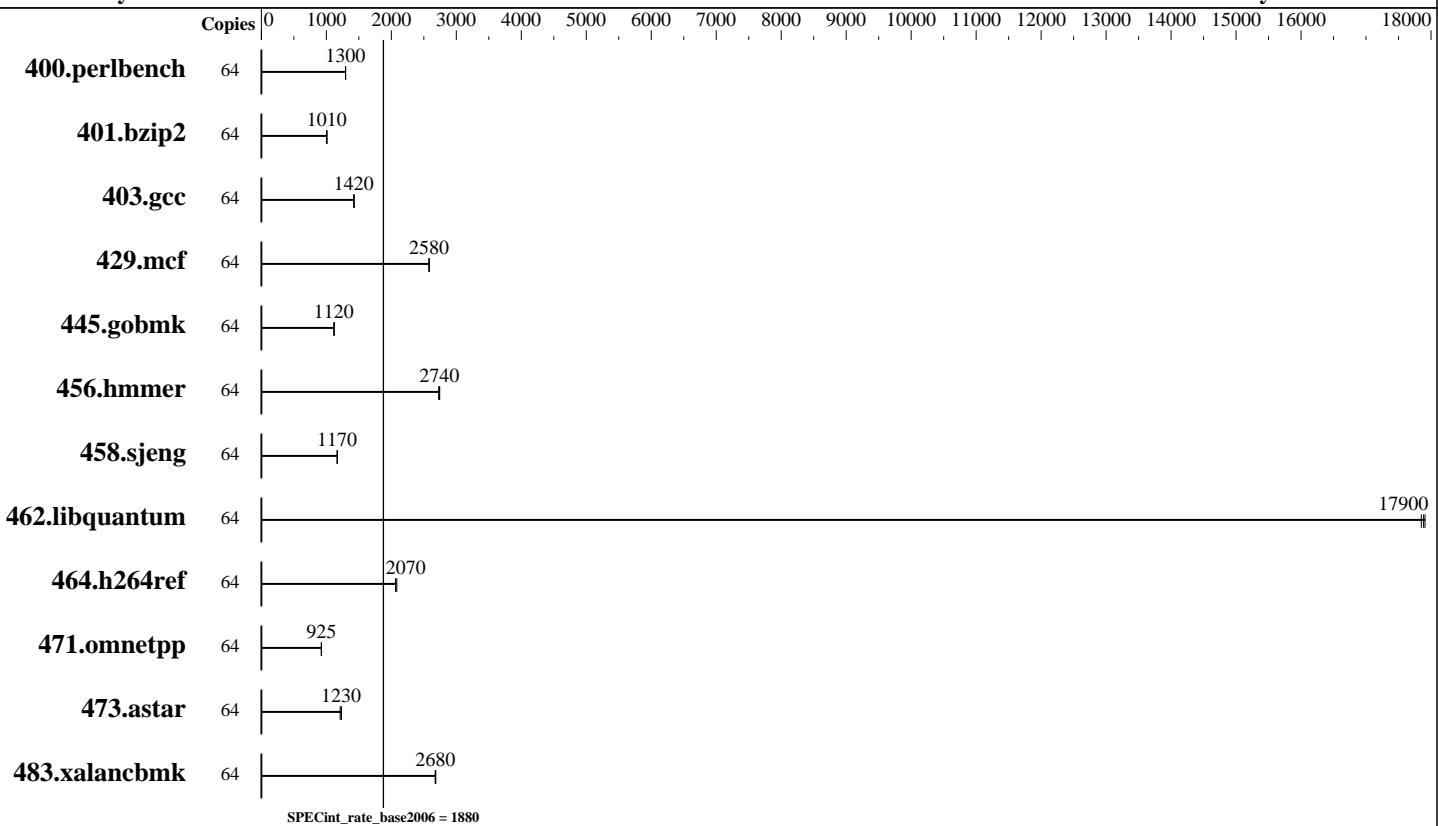

Hardware

CPU Name: Intel Xeon E7-8893 v4
CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
CPU MHz: 3200
FPU: Integrated
CPU(s) enabled: 32 cores, 8 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 4,8 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 60 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (64 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
Disk Subsystem: 2 x 600 GB SAS, 10K RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1
Kernel 3.12.49-11-default
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 5 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8893 v4)

SPECint_rate_base2006 = 1880

CPU2006 license: 3175

Test date: Apr-2017

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Dec-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	483	1290	483	1300	482	1300							
401.bzip2	64	615	1000	614	1010	611	1010							
403.gcc	64	363	1420	362	1420	360	1430							
429.mcf	64	226	2580	226	2580	226	2580							
445.gobmk	64	601	1120	601	1120	599	1120							
456.hmmer	64	218	2740	218	2740	219	2730							
458.sjeng	64	663	1170	664	1170	663	1170							
462.libquantum	64	74.3	17900	74.1	17900	74.0	17900							
464.h264ref	64	686	2060	685	2070	680	2080							
471.omnetpp	64	432	926	432	925	434	921							
473.astar	64	365	1230	371	1210	366	1230							
483.xalancbmk	64	164	2680	165	2680	165	2680							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Turbo mode set with:

cpupower -c all frequency-set -g performance

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /home/spec/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on linux-v9m3 Sat Apr 1 20:23:31 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E7-8893 v4 @ 3.20GHz
  8 "physical id"s (chips)
  64 "processors"
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8893 v4)

SPECint_rate_base2006 = 1880

CPU2006 license: 3175

Test date: Apr-2017

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Dec-2015

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
siblings  : 8
physical 0: cores 12 13 25 26
physical 1: cores 12 13 25 26
physical 2: cores 12 13 25 26
physical 3: cores 12 13 25 26
physical 4: cores 12 13 25 26
physical 5: cores 12 13 25 26
physical 6: cores 12 13 25 26
physical 7: cores 12 13 25 26
cache size : 61440 KB
```

```
From /proc/meminfo
MemTotal:      1058286256 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 1
    # This file is deprecated and will be removed in a future service pack or
    release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP1"
    VERSION_ID="12.1"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp1"
sgi-accelerate-release: SGI Accelerate 1.12, Build
714r18.sles12sp1-1604041900
```

```
uname -a:
Linux linux-v9m3 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 5 Apr 1 20:20
```

```
SPEC is set to: /home/spec
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   1.1T  456G  618G  43%  /home
Additional information from dmidecode:
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8893 v4)

SPECint_rate_base2006 = 1880

CPU2006 license: 3175

Test date: Apr-2017

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Dec-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 5.11 02/21/2017

Memory:

64x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1600 MHz
128x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/spec/libs/32:/home/spec/libs/64:/home/spec/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hammer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9008 (Intel Xeon E7-8893 v4)

SPECint_rate_base2006 = 1880

CPU2006 license: 3175

Test date: Apr-2017

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Dec-2015

Base Portability Flags (Continued)

471.omnetpp: -D_FILE_OFFSET_BITS=64

473.astar: -D_FILE_OFFSET_BITS=64

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.20170404.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.20170404.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 4 12:40:03 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 October 2017.