



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9016(Intel Xeon E7-8855 v4)

SPECint_rate_base2006 = 8000

CPU2006 license: 3175


Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Sep-2016

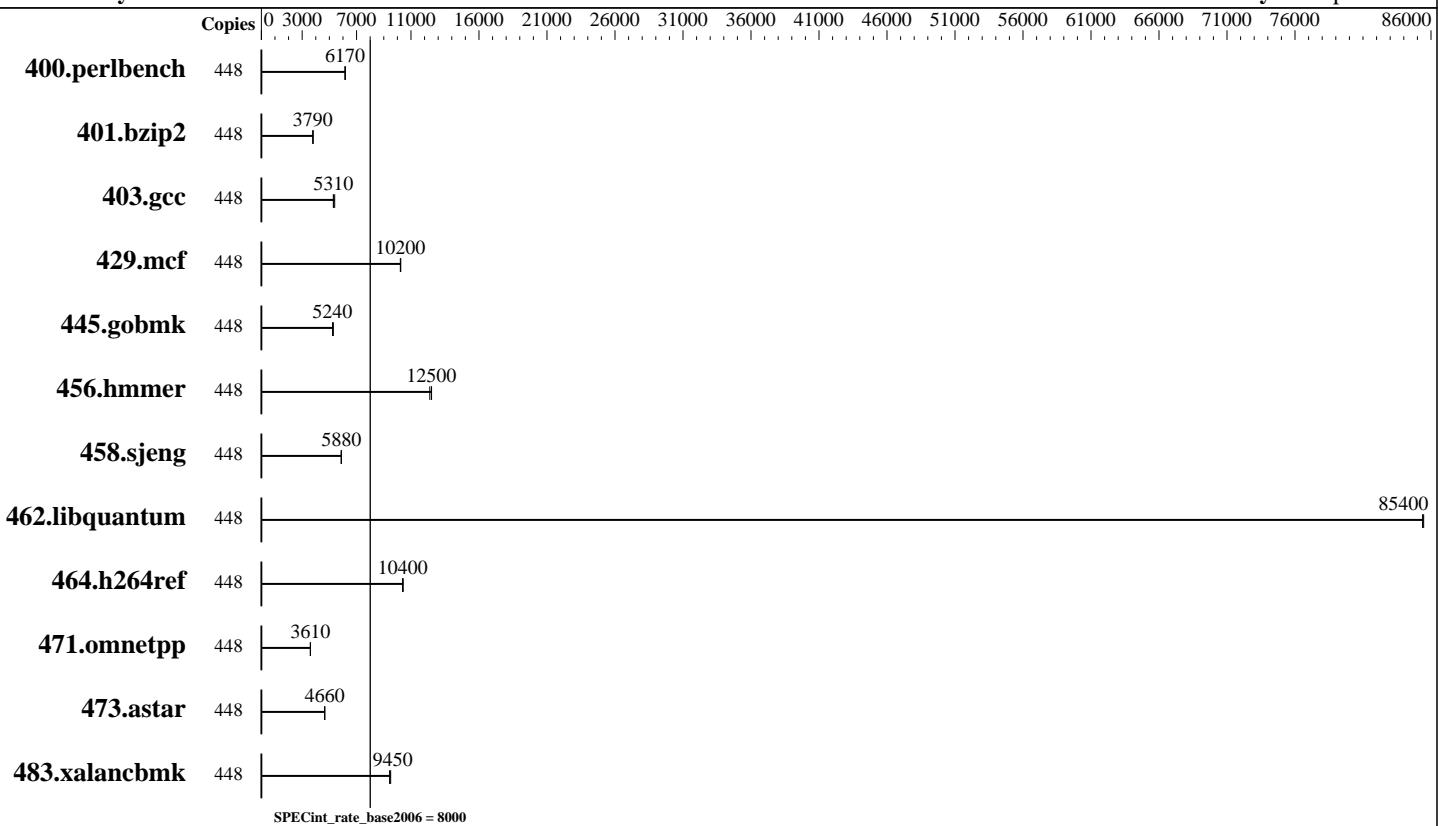

Hardware

CPU Name: Intel Xeon E7-8855 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 224 cores, 16 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 4,8,16 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 35 MB I+D on chip per chip
 Other Cache: None
 Memory: 2 TB (128 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
 Disk Subsystem: 2 x 600 GB SAS, 10K RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP1 3.12.49-11-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9016(Intel Xeon E7-8855 v4)

SPECint_rate_base2006 = 8000

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Sep-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	448	712	6150	710	6170	710	6170							
401.bzip2	448	1140	3790	1142	3790	1138	3800							
403.gcc	448	682	5290	669	5390	679	5310							
429.mcf	448	400	10200	399	10200	399	10200							
445.gobmk	448	897	5240	897	5240	888	5290							
456.hammer	448	338	12400	334	12500	334	12500							
458.sjeng	448	922	5880	922	5880	923	5870							
462.libquantum	448	109	85500	109	85400	109	85400							
464.h264ref	448	951	10400	953	10400	955	10400							
471.omnetpp	448	776	3610	777	3600	776	3610							
473.astar	448	676	4650	675	4660	675	4660							
483.xalancbmk	448	327	9450	325	9510	328	9430							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Turbo mode set with:

cpupower -c all frequency-set -g performance

Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Performance

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-ew80 Mon May 22 08:20:49 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E7-8855 v4 @ 2.10GHz
  16 "physical id"s (chips)
  448 "processors"
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9016(Intel Xeon E7-8855 v4)

SPECint_rate_base2006 = 8000

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Sep-2016

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 14
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 8: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 9: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 10: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 11: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 12: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 13: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 14: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 15: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 35840 KB
```

From /proc/meminfo

```
MemTotal:      2117105068 kB
HugePages_Total:   153600
Hugepagesize:    2048 kB
```

/usr/bin/lsb_release -d

```
SUSE Linux Enterprise Server 12 SP1
```

From /etc/*release* /etc/*version*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 1
  # This file is deprecated and will be removed in a future service pack or
  release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP1"
  VERSION_ID="12.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

uname -a:

```
Linux linux-ew80 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9016(Intel Xeon E7-8855 v4)

SPECint_rate_base2006 = 8000

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Sep-2016

Platform Notes (Continued)

run-level 5 May 22 08:18

```
SPEC is set to: /spec
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda3        ext4  1.1T  95G   961G   9% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLXSV207 04/17/2017

Memory:

128x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1333 MHz
256x NO DIMM NO DIMM

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECint_rate2006 = Not Run

Kunlun 9016(Intel Xeon E7-8855 v4)

SPECint_rate_base2006 = 8000

CPU2006 license: 3175

Test date: May-2017

Test sponsor: Huawei

Hardware Availability: Jan-2016

Tested by: Huawei

Software Availability: Sep-2016

Base Portability Flags (Continued)

```
445.gobmk: -D_FILE_OFFSET_BITS=64  
456.hmmer: -D_FILE_OFFSET_BITS=64  
458.sjeng: -D_FILE_OFFSET_BITS=64  
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX  
464.h264ref: -D_FILE_OFFSET_BITS=64  
471.omnetpp: -D_FILE_OFFSET_BITS=64  
473.astar: -D_FILE_OFFSET_BITS=64  
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.20170404.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.2-BDW-RevG.20170404.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Oct 9 12:04:15 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 October 2017.