



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8176)

SPECint®2006 =

Not Run

SPECint_base2006 =

80.8

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Sep-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

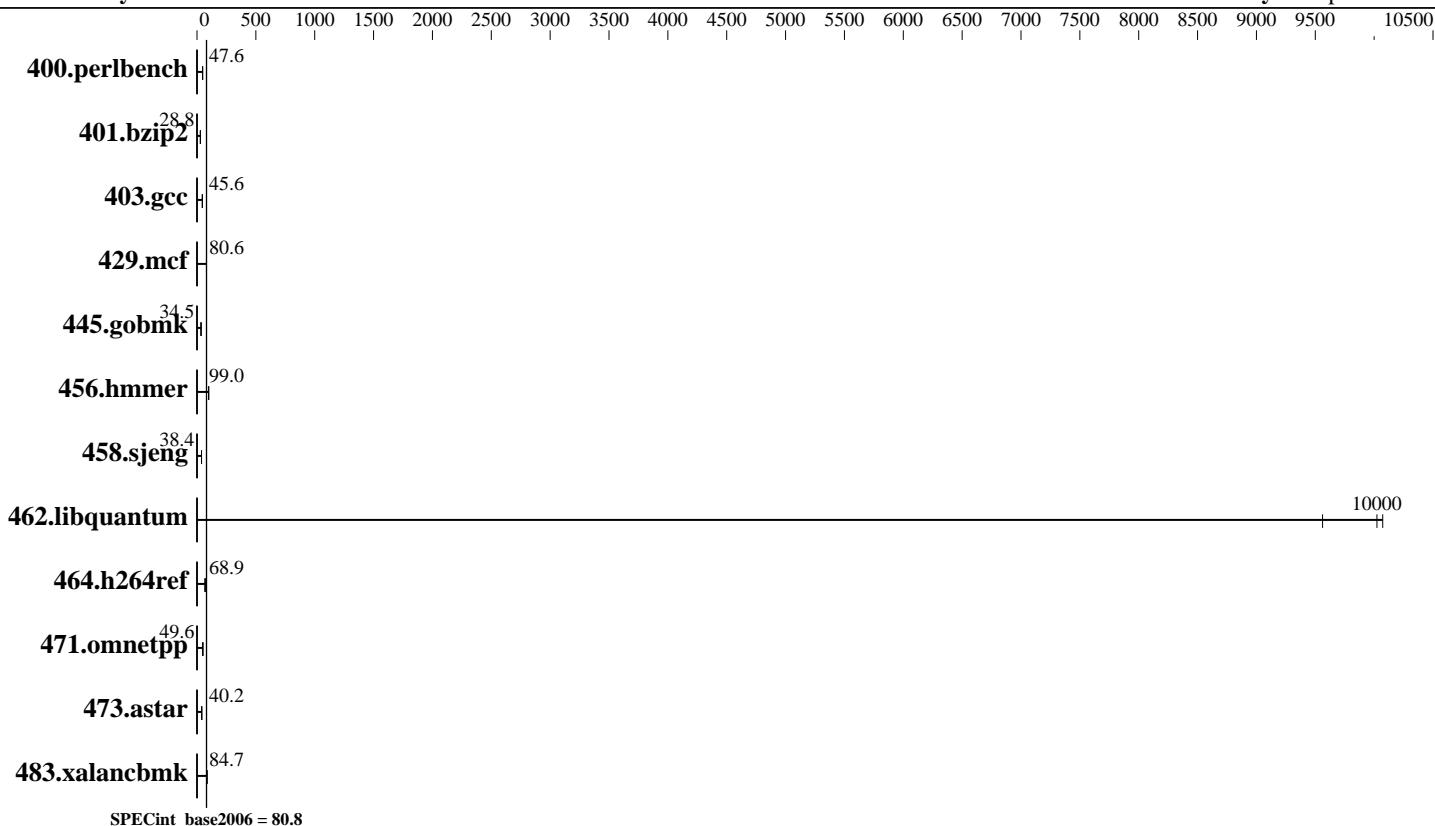

Hardware

CPU Name: Intel Xeon Platinum 8176
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip
 CPU(s) orderable: 1, 2 chip(s)
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 38.5 MB I+D on chip per chip
 Other Cache: None
 Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)
 Disk Subsystem: 1 x 960 GB SATA SSD, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server 7.3 (Maipo), Kernel 3.10.0-514.6.1.el7.x86_64
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: Not Applicable
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8176)

SPECint2006 =

Not Run

SPECint_base2006 =

80.8

CPU2006 license: 3

Test date: Sep-2017

Test sponsor: HPE

Hardware Availability: Oct-2017

Tested by: HPE

Software Availability: Apr-2017

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|-------------|-------------|-------------|--------------|------------|-------------|---------|-------|---------|-------|---------|-------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 205 | 47.6 | 205 | 47.6 | 205 | 47.7 | | | | | | |
| 401.bzip2 | 335 | 28.8 | 334 | 28.9 | 335 | 28.8 | | | | | | |
| 403.gcc | 176 | 45.7 | 176 | 45.6 | 176 | 45.6 | | | | | | |
| 429.mcf | 113 | 80.6 | 113 | 80.4 | 113 | 80.7 | | | | | | |
| 445.gobmk | 304 | 34.5 | 304 | 34.5 | 304 | 34.5 | | | | | | |
| 456.hmmer | 94.1 | 99.1 | 94.2 | 99.0 | 94.5 | 98.7 | | | | | | |
| 458.sjeng | 315 | 38.4 | 315 | 38.4 | 315 | 38.4 | | | | | | |
| 462.libquantum | 2.06 | 10100 | 2.07 | 10000 | 2.17 | 9560 | | | | | | |
| 464.h264ref | 321 | 68.9 | 321 | 68.9 | 320 | 69.1 | | | | | | |
| 471.omnetpp | 126 | 49.6 | 127 | 49.1 | 126 | 49.7 | | | | | | |
| 473.astar | 175 | 40.2 | 175 | 40.2 | 175 | 40.2 | | | | | | |
| 483.xalancbmk | 81.5 | 84.7 | 81.5 | 84.7 | 81.4 | 84.7 | | | | | | |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run

irqbalance disabled with "systemctl stop irqbalance"

tuned profile set with "tuned-adm profile throughput-performance"

Platform Notes

BIOS Configuration:

Intel Hyperthreading set to Disabled

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetcher set to Enabled

LLC Dead Line Allocation set to Disabled

Workload Pofile set to General Peak Frequency Compute

Energy/Performance Bias set to Maximum Performance

Uncore Frequency Scaling set to Auto

Workload Pofile set to Custom

NUMA Group Size Optimization set to Flat

Sysinfo program /cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on s1-8176-RHEL73U Thu Sep 28 14:32:14 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8176)

SPECint2006 =

Not Run

SPECint_base2006 =

80.8

CPU2006 license: 3

Test date: Sep-2017

Test sponsor: HPE

Hardware Availability: Oct-2017

Tested by: HPE

Software Availability: Apr-2017

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
  2 "physical id"s (chips)
  56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 28
  siblings : 28
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
  25 26 27 28 29 30
  physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
  25 26 27 28 29 30
  cache size : 39424 KB
```

```
From /proc/meminfo
MemTotal:      197569016 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.3 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.3"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

```
uname -a:
Linux s1-8176-RHEL73U 3.10.0-514.6.1.el7.x86_64 #1 SMP Sat Dec 10 11:15:38
EST 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Sep 28 13:52

```
SPEC is set to: /cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sdb4        xfs   889G   28G   862G   4% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8176)

SPECint2006 =

Not Run

SPECint_base2006 =

80.8

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Sep-2017

Hardware Availability:

Oct-2017

Software Availability:

Apr-2017

Platform Notes (Continued)

BIOS HPE U30 09/29/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/cpu2006/lib/ia32:/cpu2006/lib/intel64:/cpu2006/sh10.2"

OMP_NUM_THREADS = "56"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.10 GHz, Intel Xeon Platinum 8176)

SPECint2006 =

Not Run

SPECint_base2006 =

80.8

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date:

Sep-2017

Hardware Availability:

Oct-2017

Software Availability:

Apr-2017

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Oct 19 11:34:48 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 October 2017.