



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise  
(Test Sponsor: HPE)

ProLiant DL380 Gen10  
(2.60 GHz, Intel Xeon Gold 6142)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1690**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

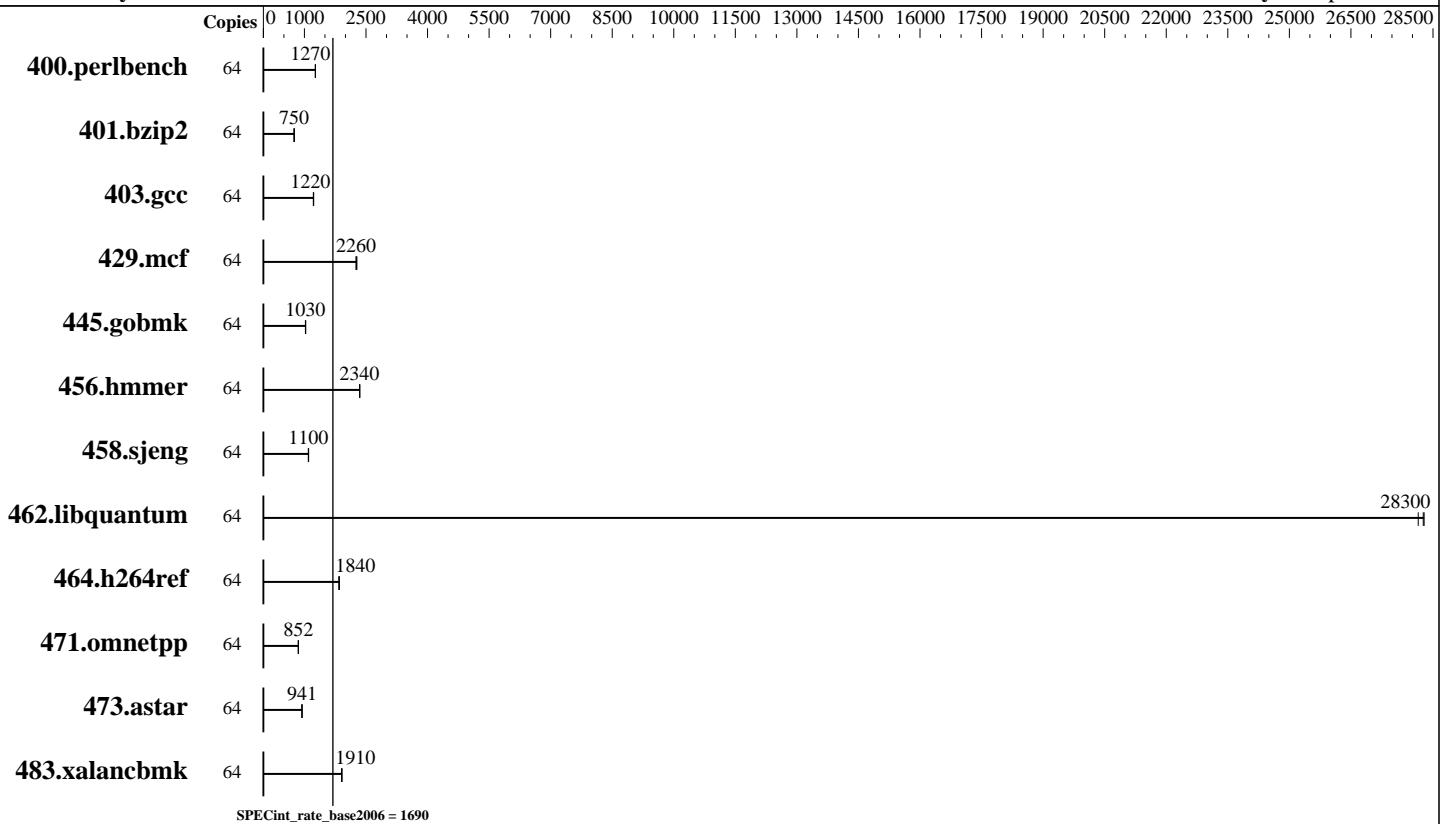

## Hardware

CPU Name: Intel Xeon Gold 6142  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 2600  
FPU: Integrated  
CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core  
CPU(s) orderable: 1, 2 chip(s)  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: 22 MB I+D on chip per chip  
Other Cache: None  
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 960 GB SSD SATA, RAID 0  
Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP2  
Kernel 4.4.21-69-default  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
Auto Parallel: No  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: Not Applicable  
Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.60 GHz, Intel Xeon Gold 6142)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1690**

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	<b>493</b>	<b>1270</b>	492	1270	494	1270							
401.bzip2	64	820	753	826	748	<b>824</b>	<b>750</b>							
403.gcc	64	423	1220	<b>421</b>	<b>1220</b>	421	1220							
429.mcf	64	258	2260	256	2280	<b>258</b>	<b>2260</b>							
445.gobmk	64	651	1030	<b>652</b>	<b>1030</b>	656	1020							
456.hammer	64	255	2340	<b>255</b>	<b>2340</b>	254	2350							
458.sjeng	64	708	1090	<b>703</b>	<b>1100</b>	703	1100							
462.libquantum	64	47.1	28100	46.9	28300	<b>46.9</b>	<b>28300</b>							
464.h264ref	64	<b>768</b>	<b>1840</b>	769	1840	765	1850							
471.omnetpp	64	<b>469</b>	<b>852</b>	470	851	469	853							
473.astar	64	<b>477</b>	<b>941</b>	477	941	477	942							
483.xalancbmk	64	<b>231</b>	<b>1910</b>	232	1910	231	1910							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

irqbalance disabled with "service irqbalance stop"

tuned profile set with "tuned-adm profile throughput-performance"

VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"

Numa balancing was disabled using "echo 0 > /proc/sys/kernel numa\_balancing"

## Platform Notes

### BIOS Configuration:

Thermal Configuration set to Maximum Cooling

Memory Patrol Scrubbing set to Disabled

LLC Prefetcher set to Enabled

LLC Dead Line Allocation set to Disabled

Stale A to S set to Disabled

Workload Pofile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C1E

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.60 GHz, Intel Xeon Gold 6142)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1690**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on dl380gen10-2 Wed Oct 25 07:12:18 2017
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz
        2 "physical id"s (chips)
        64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 16
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
cache size : 22528 KB
```

```
From /proc/meminfo
MemTotal:      197550452 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux dl380gen10-2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Oct 25 07:11
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.60 GHz, Intel Xeon Gold 6142)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1690**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Oct-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   517G  141G  376G  28%  /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 09/29/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmr: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.60 GHz, Intel Xeon Gold 6142)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 1690**

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

## Base Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 15 10:59:13 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 November 2017.