



SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10
(2.10 GHz, Intel Xeon Silver 4116)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 1020

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

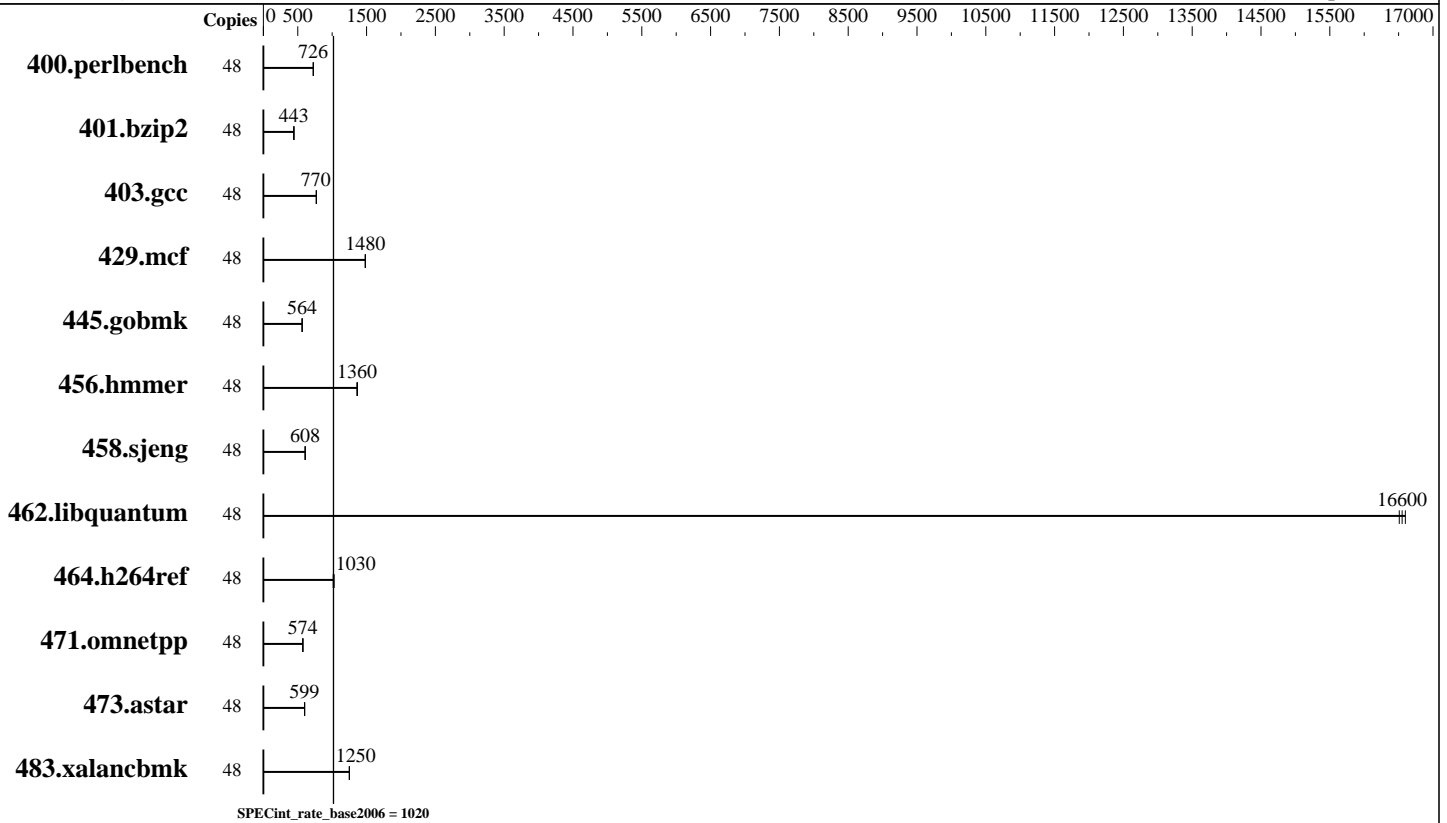

Hardware

CPU Name: Intel Xeon Silver 4116
CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz: 2100
FPU: Integrated
CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chip(s)
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 16.5 MB I+D on chip per chip
Other Cache: None
Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2400)
Disk Subsystem: 1 x 600 GB SATA SSD, RAID 0
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
 Kernel 4.4.21-68-default
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: Not Applicable
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10
(2.10 GHz, Intel Xeon Silver 4116)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 1020

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	645	727	647	725	<u>646</u>	<u>726</u>							
401.bzip2	48	1039	446	1051	441	<u>1045</u>	<u>443</u>							
403.gcc	48	<u>502</u>	<u>770</u>	503	769	501	771							
429.mcf	48	295	1480	<u>295</u>	<u>1480</u>	296	1480							
445.gobmk	48	894	563	893	564	<u>893</u>	<u>564</u>							
456.hammer	48	327	1370	<u>329</u>	<u>1360</u>	329	1360							
458.sjeng	48	956	608	956	608	<u>956</u>	<u>608</u>							
462.libquantum	48	60.2	16500	59.9	16600	<u>60.1</u>	<u>16600</u>							
464.h264ref	48	1047	1010	<u>1036</u>	<u>1030</u>	1036	1030							
471.omnetpp	48	<u>522</u>	<u>574</u>	522	574	524	573							
473.astar	48	561	601	563	598	<u>563</u>	<u>599</u>							
483.xalancbmk	48	265	1250	<u>265</u>	<u>1250</u>	265	1250							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
  shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
irqbalance disabled with "service irqbalance stop"
tuned profile set with "tuned-adm profile throughput-performance"
VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty_ratio"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"
```

Platform Notes

```
BIOS Configuration:
Thermal Configuration set to Maximum Cooling
LLC Prefetcher set to Enabled
LLC Dead Line Allocation set to Disabled
State A to S set to Disabled
Memory Patrol Scrubbing set to disabled
Workload Profile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C1E
Continued on next page
```



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10
(2.10 GHz, Intel Xeon Silver 4116)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 1020

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

Sysinfo program /home/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on linux-perm Sun Oct 15 05:55:22 2017

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Silver 4116 CPU @ 2.10GHz
 2 "physical id"s (chips)
 48 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 12
siblings   : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 16896 KB
```

From /proc/meminfo

```
MemTotal:      197745864 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
```

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

```
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-perm 4.4.21-68-default #1 SMP Tue Oct 18 18:19:37 UTC 2016
(63cf368) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 12 14:05

SPEC is set to: /home/cpu2006

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   517G  119G  398G  23% /home
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10
(2.10 GHz, Intel Xeon Silver 4116)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 1020

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Platform Notes (Continued)

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U32 09/29/2017

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz, configured at 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10
(2.10 GHz, Intel Xeon Silver 4116)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 1020

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Oct-2017

Hardware Availability: Oct-2017

Software Availability: Apr-2017

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revD.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Nov 15 10:59:26 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 November 2017.