



# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECint®\_rate2006 = 5540

SPECint\_rate\_base2006 = 5310

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Nov-2017

Hardware Availability: Jul-2017

Software Availability: Nov-2016

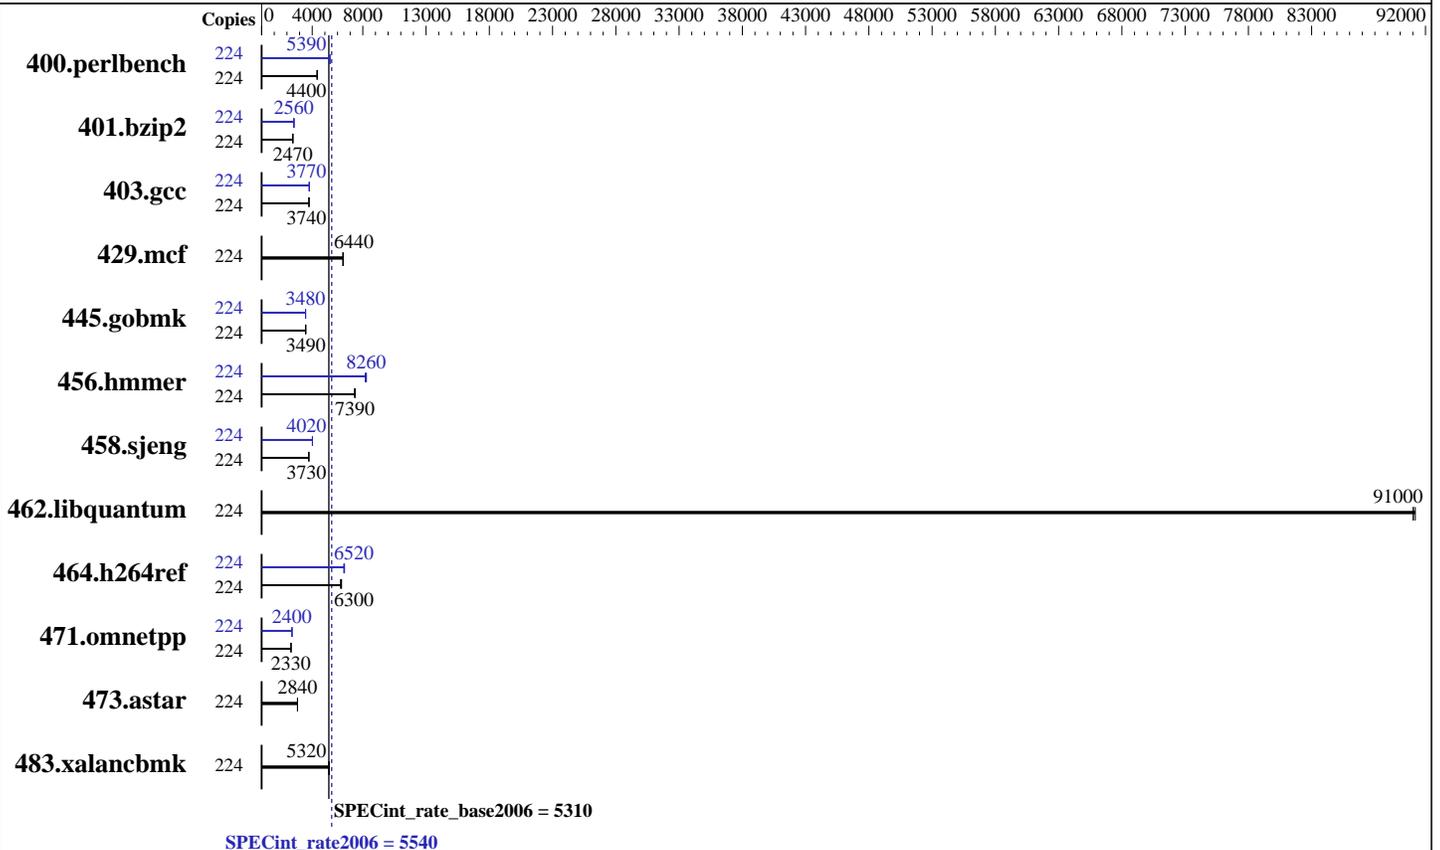

### Hardware

CPU Name: Intel Xeon Platinum 8180  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 112 cores, 4 chips, 28 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 38.5 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
 Disk Subsystem: 1 x 240 GB M.2 SATA SSD  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2  
 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++  
 Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 5540

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

SPECint\_rate\_base2006 = 5310

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Nov-2017  
Hardware Availability: Jul-2017  
Software Availability: Nov-2016

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	224	498	4400	<b>498</b>	<b>4400</b>	499	4380	224	406	5380	405	5410	<b>406</b>	<b>5390</b>
401.bzip2	224	873	2480	878	2460	<b>874</b>	<b>2470</b>	224	851	2540	841	2570	<b>843</b>	<b>2560</b>
403.gcc	224	<b>482</b>	<b>3740</b>	483	3740	480	3760	224	478	3780	<b>478</b>	<b>3770</b>	480	3760
429.mcf	224	317	6440	<b>317</b>	<b>6440</b>	317	6440	224	317	6440	<b>317</b>	<b>6440</b>	317	6440
445.gobmk	224	675	3480	674	3490	<b>674</b>	<b>3490</b>	224	676	3470	676	3480	<b>676</b>	<b>3480</b>
456.hammer	224	285	7340	<b>283</b>	<b>7390</b>	282	7400	224	255	8190	<b>253</b>	<b>8260</b>	252	8290
458.sjeng	224	<b>727</b>	<b>3730</b>	727	3730	725	3740	224	675	4020	675	4020	<b>675</b>	<b>4020</b>
462.libquantum	224	51.0	91000	50.9	91200	<b>51.0</b>	<b>91000</b>	224	51.0	91000	50.9	91200	<b>51.0</b>	<b>91000</b>
464.h264ref	224	795	6240	784	6320	<b>787</b>	<b>6300</b>	224	761	6510	756	6560	<b>761</b>	<b>6520</b>
471.omnetpp	224	603	2320	<b>602</b>	<b>2330</b>	602	2330	224	583	2400	<b>583</b>	<b>2400</b>	584	2400
473.astar	224	554	2840	555	2830	<b>554</b>	<b>2840</b>	224	554	2840	555	2830	<b>554</b>	<b>2840</b>
483.xalancbmk	224	291	5320	289	5350	<b>290</b>	<b>5320</b>	224	291	5320	289	5350	<b>290</b>	<b>5320</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /home/cpu2006-1.2\_ic17u3/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on linux-wyju Fri Nov 17 16:20:56 2017

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 5540**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

**SPECint\_rate\_base2006 = 5310**

**CPU2006 license:** 55

**Test date:** Nov-2017

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jul-2017

**Tested by:** Dell Inc.

**Software Availability:** Nov-2016

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 4 "physical id"s (chips)
 224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores      : 28
siblings       : 56
physical 0:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
                25 26 27 28 29 30
physical 1:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
                25 26 27 28 29 30
physical 2:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
                25 26 27 28 29 30
physical 3:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
                25 26 27 28 29 30
cache size     : 39424 KB

```

From /proc/meminfo

```

MemTotal:      791224256 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

/usr/bin/lsc\_release -d

SUSE Linux Enterprise Server 12 SP2

From /etc/\*release\* /etc/\*version\*

```

SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

```

Linux linux-wyju 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 5540**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

**SPECint\_rate\_base2006 = 5310**

**CPU2006 license:** 55

**Test date:** Nov-2017

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jul-2017

**Tested by:** Dell Inc.

**Software Availability:** Nov-2016

## Platform Notes (Continued)

run-level 3 Nov 17 16:17

SPEC is set to: /home/cpu2006-1.2\_ic17u3

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb1	xfs	224G	3.8G	220G	2%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.7 08/10/2017

Memory:

4x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz  
 22x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666 MHz  
 22x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006-1.2\_ic17u3/lib/ia32:/home/cpu2006-1.2\_ic17u3/lib/intel64:/home/cpu2006-1.2\_ic17u3/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -D\_FILE\_OFFSET\_BITS=64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 5540**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

**SPECint\_rate\_base2006 = 5310**

**CPU2006 license:** 55

**Test date:** Nov-2017

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jul-2017

**Tested by:** Dell Inc.

**Software Availability:** Nov-2016

## Base Portability Flags (Continued)

```

429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

```

## Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

```

400.perlbench: icc -m64

```

```

401.bzip2: icc -m64

```

```

456.hmmer: icc -m64

```

```

458.sjeng: icc -m64

```

C++ benchmarks:

```

icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 5540**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

**SPECint\_rate\_base2006 = 5310**

**CPU2006 license:** 55

**Test date:** Nov-2017

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jul-2017

**Tested by:** Dell Inc.

**Software Availability:** Nov-2016

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
            -qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div
          -qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX512 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
            -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll4 -auto-ilp32
            -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
              -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECint\_rate2006 = 5540**

PowerEdge R940 (Intel Xeon Platinum 8180, 2.50 GHz)

**SPECint\_rate\_base2006 = 5310**

**CPU2006 license:** 55

**Test date:** Nov-2017

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jul-2017

**Tested by:** Dell Inc.

**Software Availability:** Nov-2016

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
             -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2)
             -qopt-ra-region-strategy=block
             -qopt-mem-layout-trans=3 -Wl,-z,muldefs
             -L/sh10.2 -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Dec 27 12:04:31 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 December 2017.