



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp[®]_rate2006 = 1630

Sugon A420-G30 (AMD EPYC 7401)

SPECfp_rate_base2006 = 1440

CPU2006 license: 9046


Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

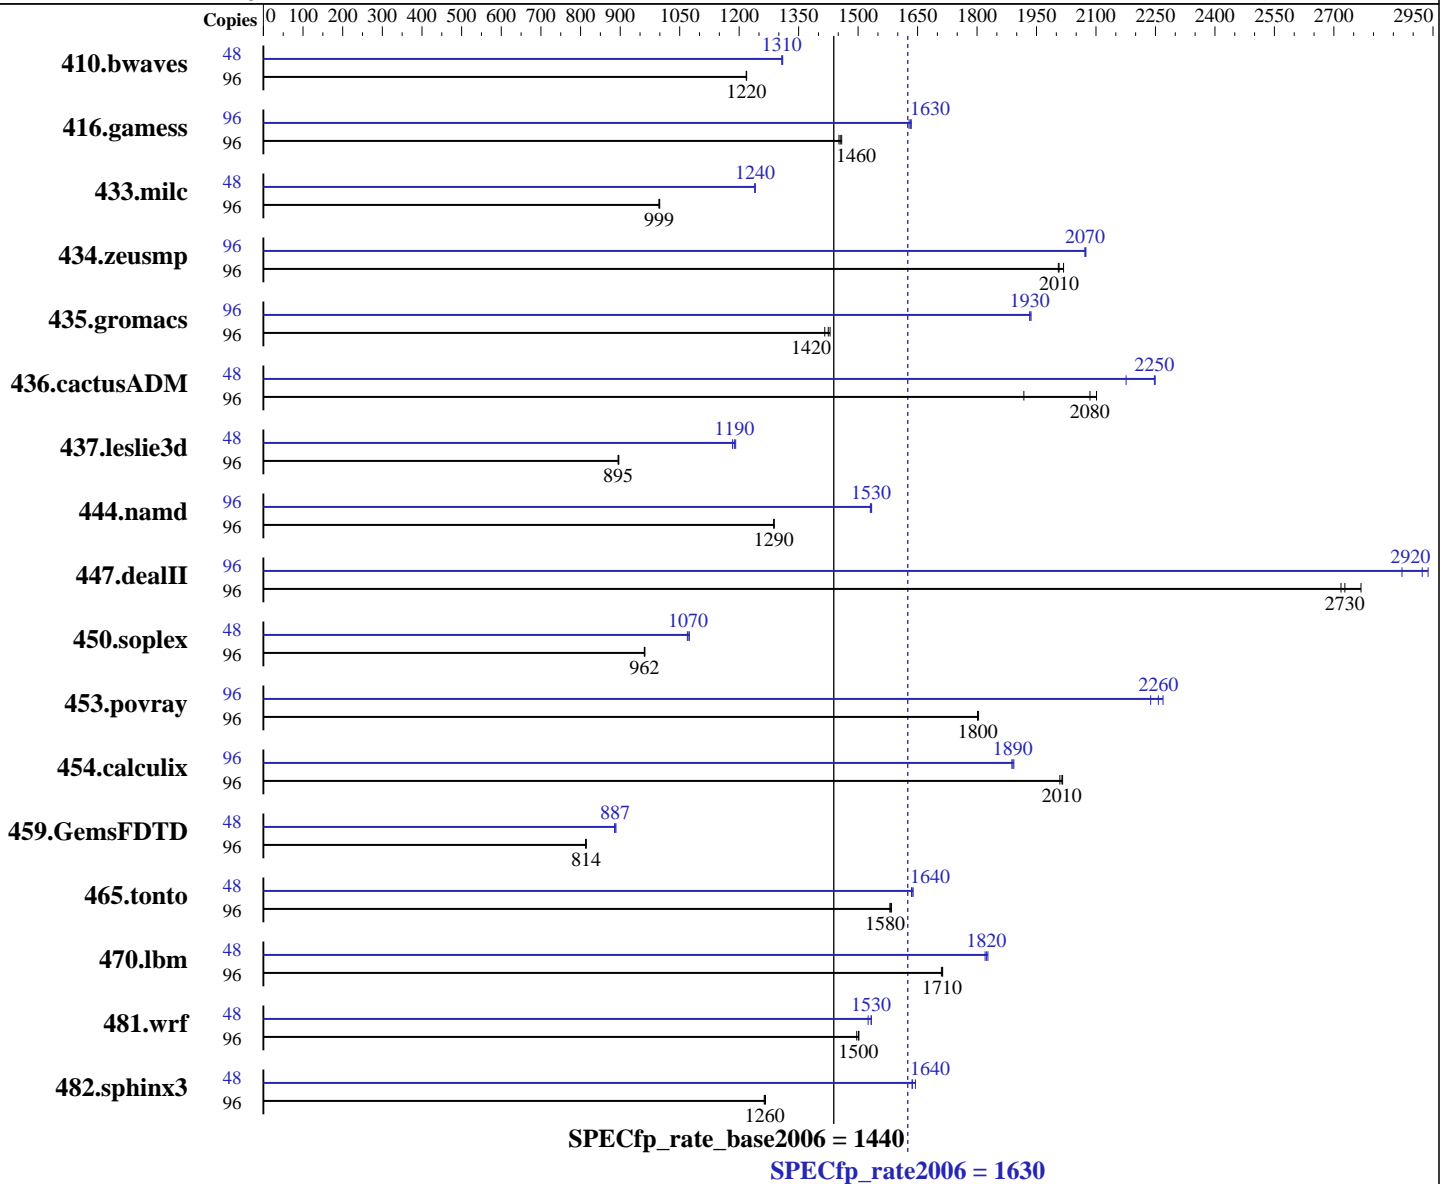

Hardware

CPU Name: AMD EPYC 7401
 CPU Characteristics: AMD Turbo CORE technology up to 3.00 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 48 cores, 2 chips, 24 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 32 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server 7.4
 Kernel 3.10.0-693.2.2
 Compiler: C/C++/Fortran: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (Multi User)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 1630

Sugon A420-G30 (AMD EPYC 7401)

SPECfp_rate_base2006 = 1440

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

L3 Cache: 64 MB I+D on chip per chip, 8 MB shared / 3 cores
Other Cache: None
Memory: 1 TB (16 x 64 GB 2S2Rx4 PC4-2667V-R, running at 2400)
Disk Subsystem: 1 x 2000 GB SATA, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	96	1070	1220	1071	1220	1071	1220	48	499	1310	498	1310	499	1310		
416.gamess	96	1289	1460	1292	1460	1295	1450	96	1154	1630	1152	1630	1150	1630		
433.milc	96	882	1000	883	998	883	999	48	355	1240	355	1240	355	1240		
434.zeusmp	96	433	2020	436	2000	435	2010	96	421	2070	421	2070	422	2070		
435.gromacs	96	481	1420	484	1420	480	1430	96	355	1930	354	1940	355	1930		
436.cactusADM	96	550	2080	598	1920	546	2100	48	264	2180	255	2250	255	2250		
437.leslie3d	96	1007	897	1008	895	1008	895	48	379	1190	381	1180	380	1190		
444.namd	96	598	1290	598	1290	598	1290	96	502	1530	502	1530	503	1530		
447.dealII	96	404	2720	403	2730	397	2770	96	376	2920	374	2940	382	2870		
450.soplex	96	832	962	833	962	833	961	48	373	1070	374	1070	374	1070		
453.povray	96	283	1800	283	1800	284	1800	96	228	2240	225	2270	226	2260		
454.calculix	96	393	2020	394	2010	393	2010	96	420	1890	419	1890	418	1890		
459.GemsFDTD	96	1251	814	1251	814	1253	813	48	575	886	574	887	573	889		
465.tonto	96	596	1580	598	1580	597	1580	48	289	1640	288	1640	289	1630		
470.lbm	96	770	1710	770	1710	771	1710	48	361	1830	362	1820	362	1820		
481.wrf	96	714	1500	714	1500	717	1500	48	352	1530	350	1530	350	1530		
482.sphinx3	96	1477	1270	1479	1260	1481	1260	48	569	1640	572	1640	572	1640		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 1630

Sugon A420-G30 (AMD EPYC 7401)

SPECfp_rate_base2006 = 1440

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

Operating System Notes (Continued)

Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

Transparent huge pages were enabled for this run (OS default)

Set vm/nr_hugepages=86016 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS settings:

Determinism Slider = Power

cTDP Control = Manual

cTDP = 200

This system Sugon A420-G30 is electrically equal with Sugon A620-G30 populated with the same processors and memories.

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/home/cpu2006/amd1603-rate-libs-revB/32:/home/cpu2006/amd1603-rate-libs-revB/64"

The binaries were built with the AMD supported x86 Open64 Compiler Suite, which is only available from AMD at <http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/> Binaries were compiled on a system with 2 x AMD Opteron 6378 chips + 128 GB Memory using RHEL 6.3

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 1630

Sugon A420-G30 (AMD EPYC 7401)

SPECfp_rate_base2006 = 1440

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

Base Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-WB, -Wl, -z,muldefs

```

C++ benchmarks:

```

-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on
-HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4
-mno-xop -mno-tbm -WB, -Wl, -z,muldefs

```

Fortran benchmarks:

```

-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2
-OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1 -mno-fma4
-mno-xop -mno-tbm -WB, -Wl, -z,muldefs

```

Benchmarks using both Fortran and C:

```

-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000
-IPA:small_pu=100 -mso -march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-WB, -Wl, -z,muldefs -LNO:blocking=off -LNO:simd_peel_align=on
-OPT:rsqrt=2 -OPT:unroll_size=256

```

Peak Compiler Invocation

C benchmarks:

openc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 1630

Sugon A420-G30 (AMD EPYC 7401)

SPECfp_rate_base2006 = 1440

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

Peak Compiler Invocation (Continued)

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64
-fno-second-underscore

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m
-IPA:plimit=7000 -IPA:callee_limit=1200
-OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso
-march=bdver1 -mno-fma4

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m
-IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mno-fma4
-mso

482.sphinx3: -Ofast -m32 -IPA:plimit=1000 -OPT:malloc_alg=2
-CG:cmp_peep=on -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on
-INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4
-mso -march=bdver2 -WB, -mno-fma4 -mno-tbm -mno-xop

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 1630

Sugon A420-G30 (AMD EPYC 7401)

SPECfp_rate_base2006 = 1440

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off
-CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256
-fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1
-OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver2
-mno-fma4 -WB, -mno-xop -mno-tbm

447.deallI: -Ofast -D_OPEN64_FAST_SET -static -INLINE:aggressive=on
-LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off
-march=bdver1 -mno-fma4

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2 -mno-fma4 -WB, -mno-xop -mno-tbm -Wl,
-z,muldefs

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver2 -mno-fma4

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1 -mno-fma4

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver2 -mno-fma4

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1 -mno-fma4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

SPECfp_rate2006 = 1630

Sugon A420-G30 (AMD EPYC 7401)

SPECfp_rate_base2006 = 1440

CPU2006 license: 9046

Test sponsor: Sugon

Tested by: Sugon

Test date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Oct-2017

Peak Optimization Flags (Continued)

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1 -mno-fma4

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver2 -WB, -mno-fma4 -mno-tbm
-mno-xop

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver2 -mno-fma4 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver2
-mno-fma4

454.calculix: -Ofast -OPT:unroll_size=256 -OPT:alias=disjoint
-GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m
-march=bdver1 -mno-fma4

481.wrf: -Ofast -LNO:blocking=off -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP
-WOPT:sib=on -march=bdver1 -mno-fma4

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html>

<http://www.spec.org/cpu2006/flags/Sugon-Naples-Platform-Settings-revC-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Naples-Platform-Settings-revC-I.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Dec 27 12:04:46 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2017.