



SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL385 Gen10
(2.40 GHz, AMD EPYC 7351)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 1350

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

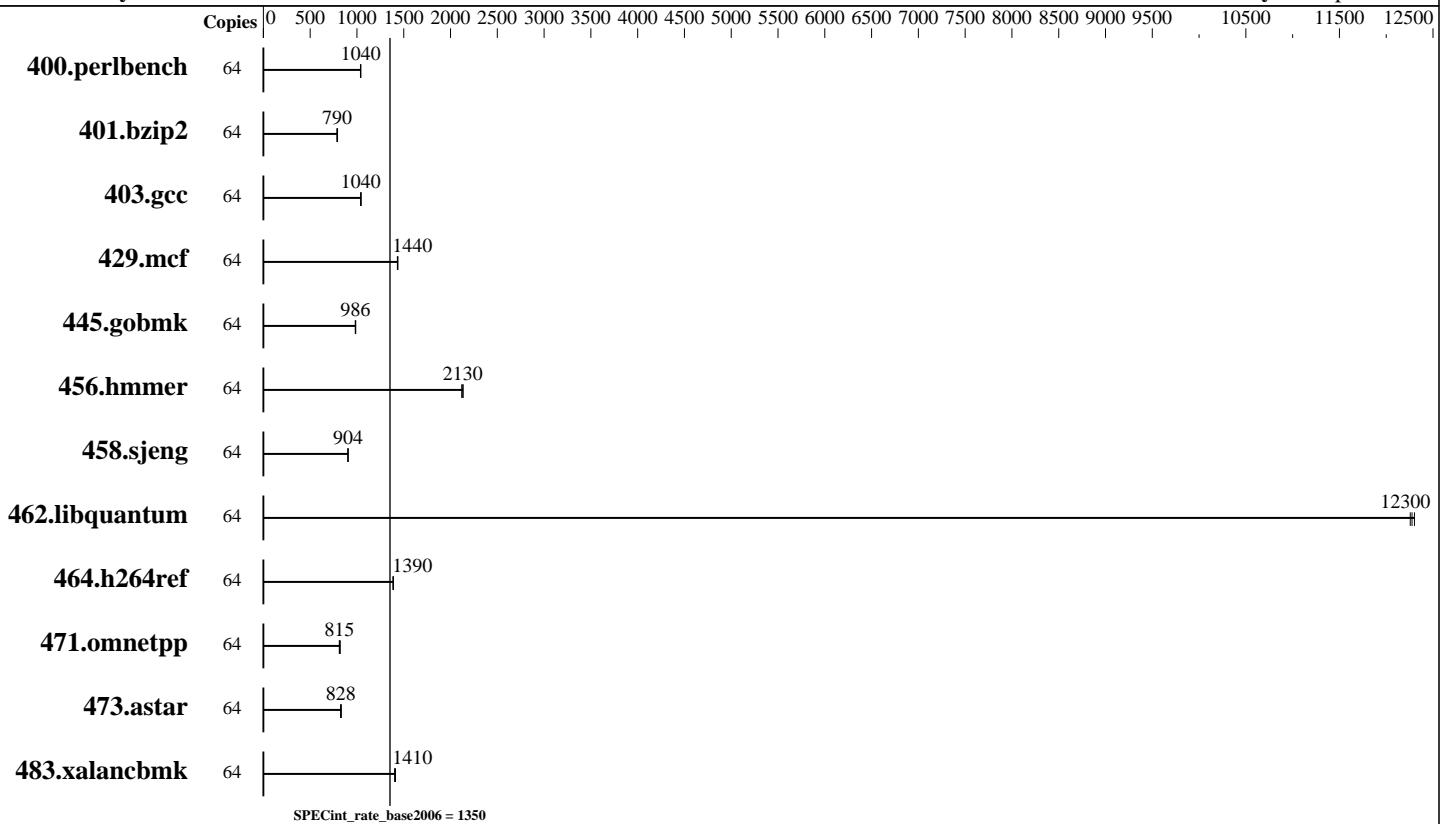

Hardware

CPU Name: AMD EPYC 7351
CPU Characteristics: AMD Turbo CORE technology up to 2.90 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable: 1, 2 chip(s)
Primary Cache: 64 KB I + 32 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core
L3 Cache: 64 MB I+D on chip per chip, 8 MB shared / 2 cores
Other Cache: None
Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP3
Kernel 4.4.73-5-default
Compiler: C/C++: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: Not Applicable
Other Software: MicroQuill SmartHeap 10.0 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL385 Gen10
(2.40 GHz, AMD EPYC 7351)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 1350

CPU2006 license: 3

Test date: Nov-2017

Test sponsor: HPE

Hardware Availability: Nov-2017

Tested by: HPE

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	601	1040	601	1040	603	1040							
401.bzip2	64	779	792	782	790	786	786							
403.gcc	64	495	1040	495	1040	493	1040							
429.mcf	64	407	1440	408	1430	406	1440							
445.gobmk	64	684	982	681	986	681	986							
456.hmmer	64	280	2130	280	2130	282	2120							
458.sjeng	64	857	904	855	906	856	904							
462.libquantum	64	108	12300	108	12300	108	12300							
464.h264ref	64	1020	1390	1021	1390	1021	1390							
471.omnetpp	64	487	822	493	811	491	815							
473.astar	64	543	828	544	826	540	832							
483.xalancbmk	64	313	1410	315	1400	314	1410							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

Set vm/nr_hugepages=86016 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling
Performance Determinism set to Power Deterministic
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Throughput Compute
Minimum Processor Idle Power Core C-State set to C6 State
Processor Power and Utilization Monitoring set to Disabled

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/home/cpu2006/amd1603-rate-libs-revB/32:/home/cpu2006/amd1603-rate-libs-revB/64"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 1350

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

General Notes (Continued)

The binaries were built with the x86 Open64 Compiler Suite, which is only available from (and supported by) AMD at <http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hmmer: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000  
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2  
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm
```

C++ benchmarks:

```
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET  
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml>

<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revD.xml>



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.40 GHz, AMD EPYC 7351)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 1350

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Nov-2017

Hardware Availability: Nov-2017

Software Availability: Sep-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Feb 8 18:04:48 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 January 2018.