



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**Superdome Flex**  
(3.00 GHz, Intel Xeon Gold 6154)

**SPECint®\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 15500**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Mar-2018

**Software Availability:** Mar-2018

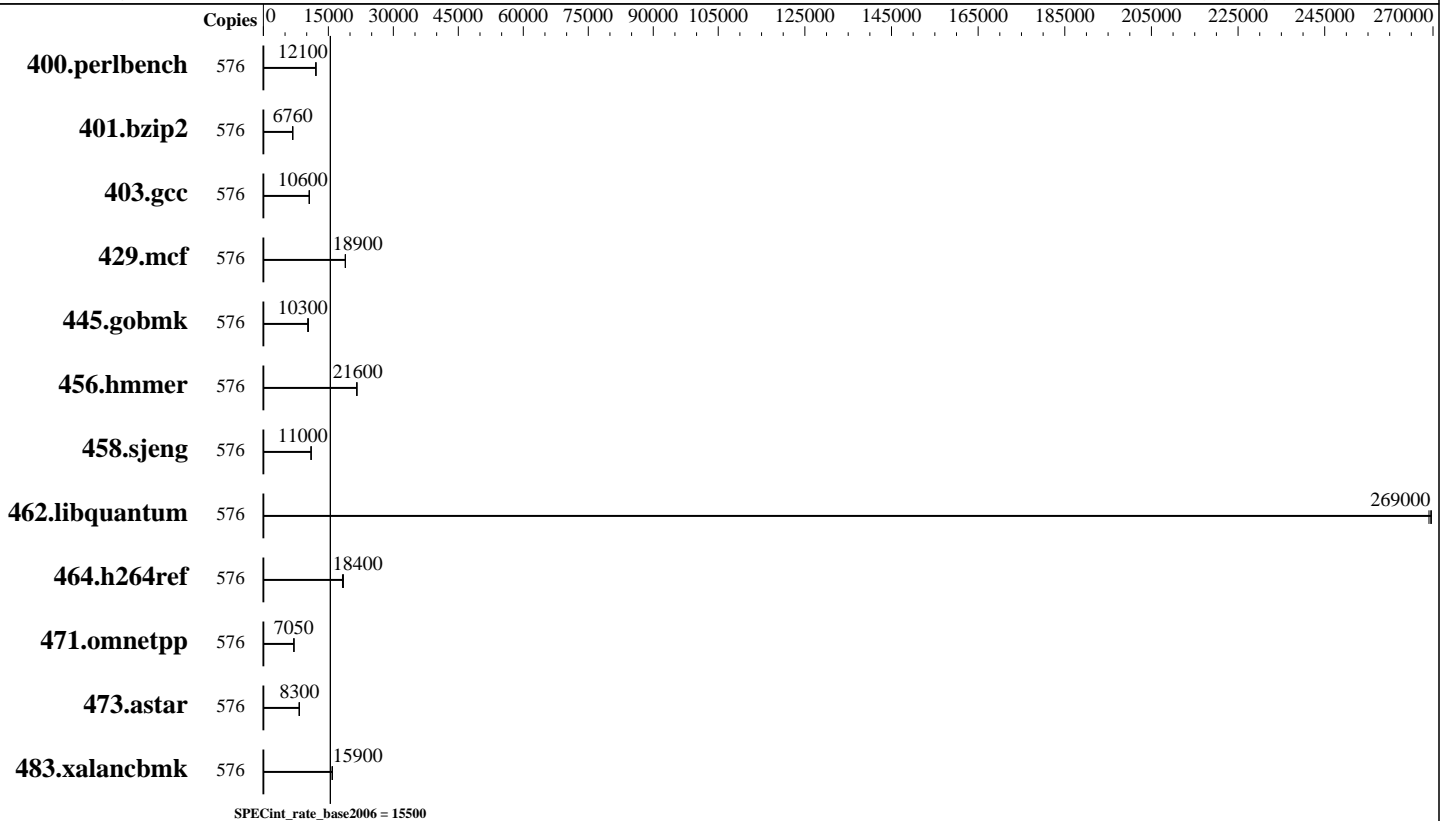

## Hardware

**CPU Name:** Intel Xeon Gold 6154  
**CPU Characteristics:** Intel Turbo Boost Technology up to 3.70 GHz  
**CPU MHz:** 3000  
**FPU:** Integrated  
**CPU(s) enabled:** 288 cores, 16 chips, 18 cores/chip, 2 threads/core  
**CPU(s) orderable:** 4 to 32 chips  
**Primary Cache:** 32 KB I + 32 KB D on chip per core  
**Secondary Cache:** 1 MB I+D on chip per core  
**L3 Cache:** 24.75 MB I+D on chip per chip  
**Other Cache:** None  
**Memory:** 6 TB (192 x 32 GB 2Rx4 PC4-2666V-R)  
**Disk Subsystem:** 6 TB tmpfs  
**Other Hardware:** None

## Software

**Operating System:** SUSE Linux Enterprise Server 12 (x86\_64) SP2, Kernel 4.4.74-92.38-default  
**Compiler:** C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux  
**Auto Parallel:** No  
**File System:** tmpfs  
**System State:** Run level 3 (multi-user)  
**Base Pointers:** 32-bit  
**Peak Pointers:** Not Applicable  
**Other Software:** Microquill SmartHeap V10.2, HPE Foundation Software 1.0, Build 717a270.sles12sp2-1709012000



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex  
(3.00 GHz, Intel Xeon Gold 6154)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 15500

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Mar-2018

Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	576	465	12100	463	12200	<b>464</b>	<b>12100</b>							
401.bzip2	576	823	6750	<b>822</b>	<b>6760</b>	817	6800							
403.gcc	576	437	10600	<b>438</b>	<b>10600</b>	438	10600							
429.mcf	576	<b>277</b>	<b>18900</b>	277	19000	278	18900							
445.gobmk	576	<b>588</b>	<b>10300</b>	589	10300	581	10400							
456.hammer	576	249	21600	249	21600	<b>249</b>	<b>21600</b>							
458.sjeng	576	634	11000	631	11000	<b>632</b>	<b>11000</b>							
462.libquantum	576	44.4	269000	<b>44.3</b>	<b>269000</b>	44.3	270000							
464.h264ref	576	698	18300	<b>692</b>	<b>18400</b>	691	18500							
471.omnetpp	576	<b>511</b>	<b>7050</b>	511	7050	511	7050							
473.astar	576	490	8250	<b>487</b>	<b>8300</b>	487	8310							
483.xalancbmk	576	<b>250</b>	<b>15900</b>	249	15900	251	15900							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
The tmpfs filesystem was set up with:
mkdir -p /dev/shm/cpu2006-16S
mount -t tmpfs -o size=6144G,rw tmpfs /dev/shm/cpu2006-16S
```

## Platform Notes

Rack Management Controller setting:  
modify npar pnum=0 ras=hpc

Sysinfo program /dev/shm/cpu2006-16S/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on uv4ttest35-sys Thu Dec 7 19:52:21 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex  
(3.00 GHz, Intel Xeon Gold 6154)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 15500

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Mar-2018

Software Availability: Mar-2018

## Platform Notes (Continued)

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz

16 "physical id"s (chips)

576 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 18

siblings : 36

physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 4: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 5: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 6: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 7: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 8: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 9: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 10: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 11: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 12: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 13: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 14: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

physical 15: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

cache size : 25344 KB

From /proc/meminfo

MemTotal: 6145746556 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

SUSE Linux Enterprise Server 12 SP2

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 2

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

hpe-foundation-release: HPE Foundation Software 1.0, Build

717a270.sles12sp2-1709012000

hpe-mpi-release: HPE MPI 1.2, Build 718a13.sles12sp2-1710021900

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION\_ID="12.2"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP2"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

Superdome Flex  
(3.00 GHz, Intel Xeon Gold 6154)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 15500**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Dec-2017

**Hardware Availability:** Mar-2018

**Software Availability:** Mar-2018

## Platform Notes (Continued)

```
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
sgi-release: SGI Performance Suite 1.16
```

```
uname -a:
Linux uv4test35-sys 4.4.74-92.38-default #1 SMP Tue Sep 12 19:43:46 UTC 2017
(545c055) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 7 12:57
```

```
SPEC is set to: /dev/shm/cpu2006-16S
Filesystem      Type      Size      Used Avail Use% Mounted on
tmpfs           tmpfs     6.0T      2.0G  6.0T   1% /dev/shm/cpu2006-16S
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/dev/shm/cpu2006-16S/lib/ia32:/dev/shm/cpu2006-16S/lib/intel64:/dev/shm/cpu2006-16S/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Superdome Flex  
(3.00 GHz, Intel Xeon Gold 6154)

SPECint\_rate2006 = Not Run

SPECint\_rate\_base2006 = 15500

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Dec-2017

Hardware Availability: Mar-2018

Software Availability: Mar-2018

## Base Portability Flags (Continued)

```

445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

```

## Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

[http://www.spec.org/cpu2006/flags/HPE-Superdome\\_Flex-RevA.html](http://www.spec.org/cpu2006/flags/HPE-Superdome_Flex-RevA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

[http://www.spec.org/cpu2006/flags/HPE-Superdome\\_Flex-RevA.xml](http://www.spec.org/cpu2006/flags/HPE-Superdome_Flex-RevA.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 16 11:54:52 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 January 2018.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 5