SPEC® CINT2006 Result

Yadro

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 1360

CPU2006 license:	4813	**Test date:**	Dec-2017
Test sponsor:	Yadro	**Hardware Availability:**	Dec-2017
Tested by:	Yadro	**Software Availability:**	Dec-2016

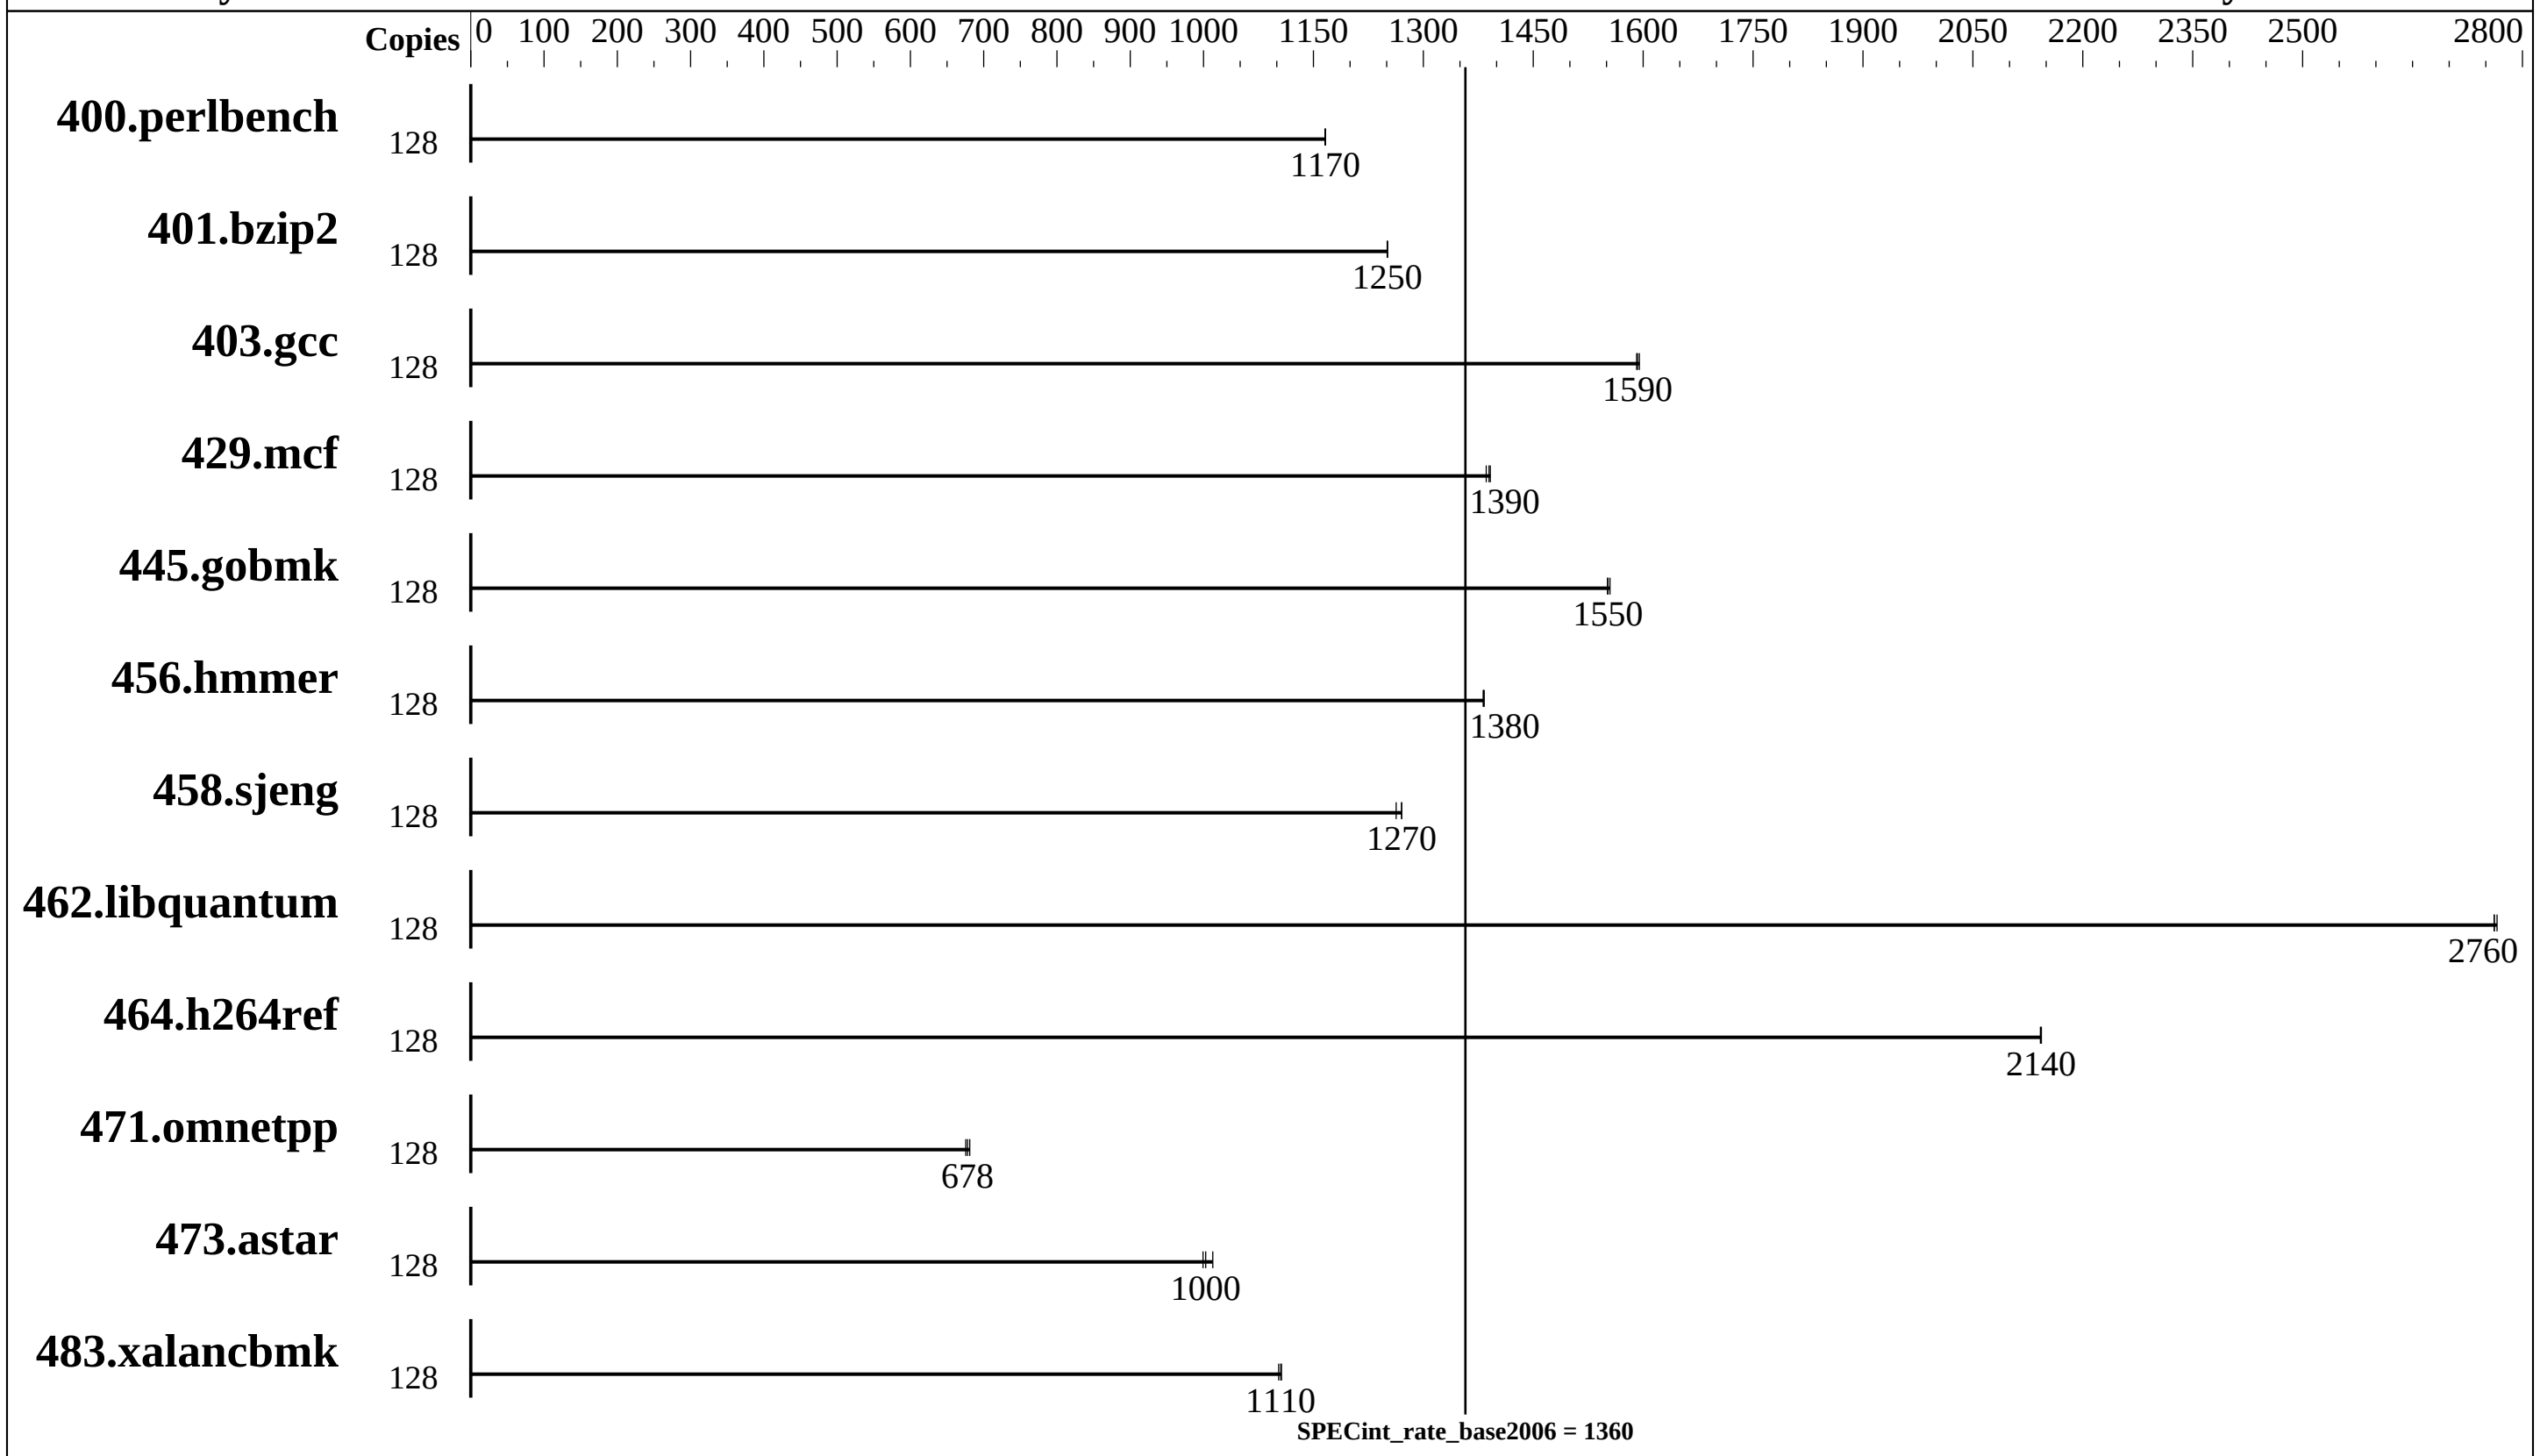

Hardware

CPU Name:	IBM POWER8
CPU Characteristics:	Intelligent Energy Optimization enabled, up to 3.86 GHz
CPU MHz:	3325
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable:	1-4 chips
Primary Cache:	32 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per core
Other Cache:	16 MB I+D off chip per 8 DIMMs
Memory:	8 TB (128 x 64 GB 4Rx4 PC4 - 2400T, running at 1600)
Disk Subsystem:	2 x 2.9 TB NVMe SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.el7.ppc64le
Compiler:	C/C++: Version 13.1.5 of IBM XL C/C++ for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other Software:	None

Yadro

Yadro Vesnin (3.32 GHz, 32 cores, RHEL 7.2)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 1360

CPU2006 license: 4813
Test sponsor: Yadro
Tested by: Yadro
Test date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Dec-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	**1072**	**1170**	1072	1170	1073	1170							
401.bzip2	128	987	1250	**987**	**1250**	988	1250							
403.gcc	128	646	1590	648	1590	**647**	**1590**							
429.mcf	128	842	1390	839	1390	**840**	**1390**							
445.gobmk	128	865	1550	864	1550	**865**	**1550**							
456.hmmer	128	863	1380	864	1380	**864**	**1380**							
458.sjeng	128	1226	1260	**1219**	**1270**	1219	1270							
462.libquantum	128	960	2760	959	2770	**960**	**2760**							
464.h264ref	128	**1322**	**2140**	1322	2140	1322	2140							
471.omnetpp	128	1184	676	1175	681	**1180**	**678**							
473.astar	128	887	1010	899	999	**896**	**1000**							
483.xalancbmk	128	801	1100	**799**	**1110**	798	1110							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "taskset" command (see flags file for details).
```

Operating System Notes

```
"ulimit -s" used to remove statck size limit.
"ppc64_cpu --smt=4" used to set SMT4 mode (see flags file for details).
```

Platform Notes

```
Sysinfo program /home/build/spec2006/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ 8787f7622badcf24e01c368b1db4377c
running on localhost.localdomain Fri Dec 15 10:10:50 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   clock : 3857.000000MHz
   machine : PowerNV 0000000000000000
   model : 0000000000000000
   platform : PowerNV
   revision : 2.0 (pvr 004d 0200)
   cpu : POWER8 (raw), altivec supported
*
```

Continued on next page

Platform Notes (Continued)

```
* 0 "physical id" tags found.  Perhaps this is an older system,
* or a virtualized system.  Not attempting to guess how to
* count chips/cores for this system.
*
      128 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)

From /proc/meminfo
   MemTotal:       8569843072 kB
   HugePages_Total:   16000
   Hugepagesize:      16384 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux localhost.localdomain 3.10.0-327.el7.ppc64le #1 SMP Thu Oct 29 17:31:13
   EDT 2015 ppc64le ppc64le ppc64le GNU/Linux

run-level 3 Jan 1 03:13

SPEC is set to: /home/build/spec2006
   Filesystem            Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   2.9T  528G  2.4T  19% /home

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
XLFRTEOPTS = "intrinthds=1"
Binaries were compiled on a system with 4x POWER8 chips + 4 TB Memory using rhel 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
```

Continued on next page

General Notes (Continued)

```
is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using
the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available.  At the time of
this publication, it may not be shipping, and/or may not be supported, and/or may fail
to meet other tests of General Availability described in the SPEC OSG Policy document,
http://www.spec.org/osg/policy.html

This measured result may not be representative of the result that would be measured were this
benchmark run with hardware and software available as of the publication date.
```

Base Compiler Invocation

C benchmarks:
`/opt/ibm/xlC/13.1.5/bin/xlc_r -qlanglvl=extc99`

C++ benchmarks:
`/opt/ibm/xlC/13.1.5/bin/xlC_r`

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX -DSPEC_CPU_LP64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX -DSPEC_CPU_LP64
464.h264ref: -qchars=signed -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-qipa=threads -q64 -O5 -qalias=noansi -qinline=40 -qsimd=noauto`

C++ benchmarks:
`-qipa=threads -q64 -O5 -qinline=40`

Base Other Flags

C benchmarks:
    -qipa=noobject

C++ benchmarks:
    -qipa=noobject

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/vesnin_xl-V1.1.html
http://www.spec.org/cpu2006/flags/vesnin_platform-V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/vesnin_xl-V1.1.xml
http://www.spec.org/cpu2006/flags/vesnin_platform-V1.1.xml