



# SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

**SPECint\_rate2006 = 4450**

**SPECint\_rate\_base2006 = 4290**

**CPU2006 license:** 3


**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

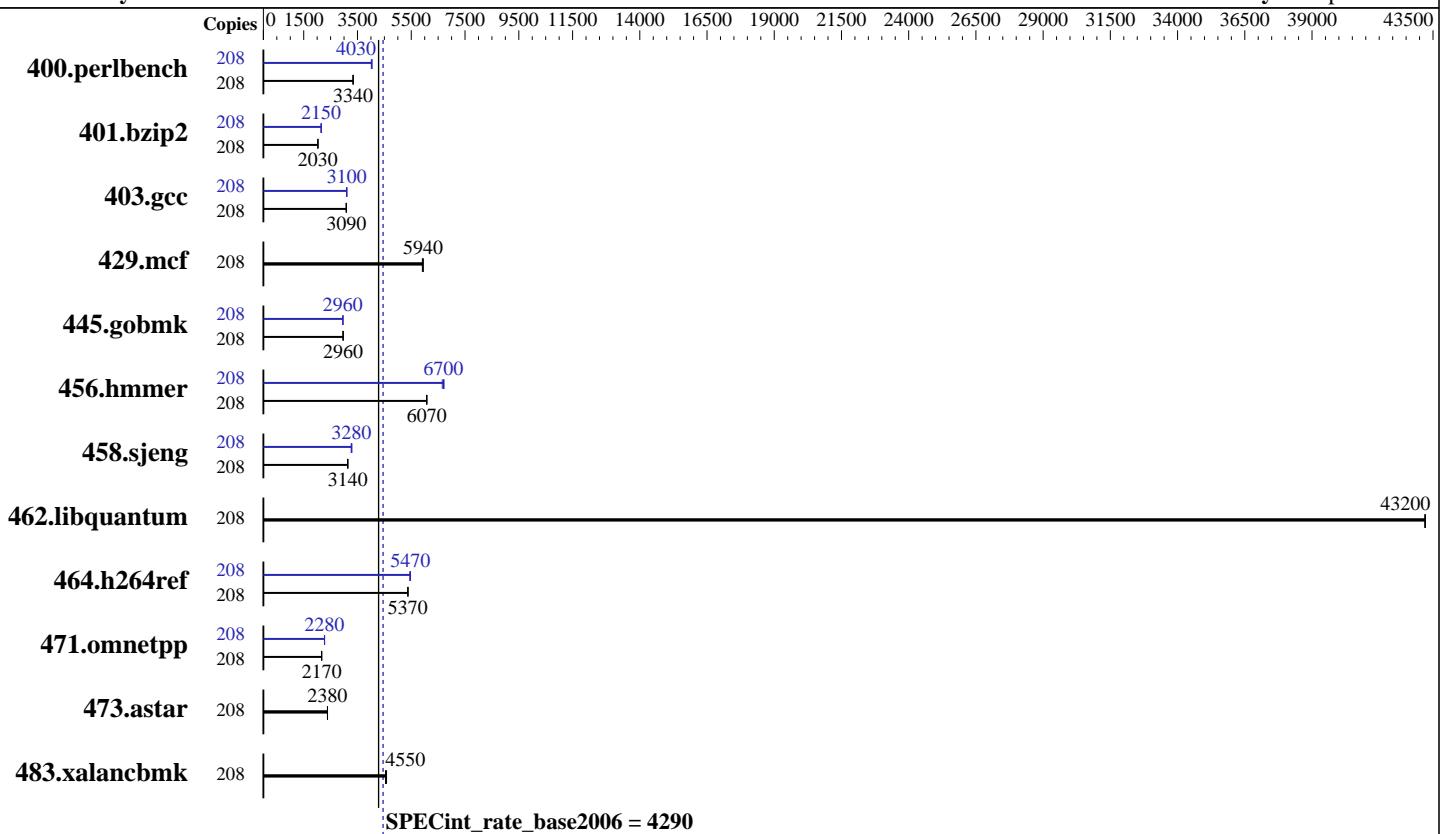

## Hardware

CPU Name: Intel Xeon Platinum 8170  
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 104 cores, 4 chips, 26 cores/chip, 2 threads/core  
CPU(s) orderable: 1, 2, 4 chip(s)  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 1 MB I+D on chip per core  
L3 Cache: 35.75 MB I+D on chip per chip  
Other Cache: None  
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)  
Disk Subsystem: 1 x 480 GB SATA SSD, RAID 0  
Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo), Kernel 3.10.0-514.el7.x86\_64  
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

**SPECint\_rate2006 = 4450**

**SPECint\_rate\_base2006 = 4290**

CPU2006 license: 3

Test date: Nov-2017

Test sponsor: HPE

Hardware Availability: Oct-2017

Tested by: HPE

Software Availability: Apr-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	208	608	3340	610	3330	<b>609</b>	<b>3340</b>	208	506	4010	<b>504</b>	<b>4030</b>	503	4040
401.bzip2	208	<b>990</b>	<b>2030</b>	990	2030	989	2030	208	936	2140	931	2160	<b>933</b>	<b>2150</b>
403.gcc	208	545	3070	542	3090	<b>542</b>	<b>3090</b>	208	542	3090	<b>540</b>	<b>3100</b>	539	3110
429.mcf	208	321	5910	<b>319</b>	<b>5940</b>	319	5940	208	321	5910	<b>319</b>	<b>5940</b>	319	5940
445.gobmk	208	735	2970	736	2960	<b>736</b>	<b>2960</b>	208	737	2960	739	2950	<b>738</b>	<b>2960</b>
456.hammer	208	<b>320</b>	<b>6070</b>	320	6070	319	6090	208	<b>290</b>	<b>6700</b>	292	6650	289	6720
458.sjeng	208	801	3140	<b>801</b>	<b>3140</b>	804	3130	208	<b>767</b>	<b>3280</b>	770	3270	<b>765</b>	3290
462.libquantum	208	<b>99.8</b>	<b>43200</b>	99.7	43200	99.8	43200	208	<b>99.8</b>	<b>43200</b>	99.7	43200	<b>99.8</b>	43200
464.h264ref	208	<b>857</b>	<b>5370</b>	857	5370	855	5380	208	845	5440	841	5470	<b>842</b>	<b>5470</b>
471.omnetpp	208	600	2170	<b>600</b>	<b>2170</b>	599	2170	208	572	2270	<b>571</b>	<b>2280</b>	571	2280
473.astar	208	613	2380	<b>612</b>	<b>2380</b>	612	2390	208	613	2380	<b>612</b>	<b>2380</b>	612	2390
483.xalancbmk	208	316	4550	<b>315</b>	<b>4550</b>	313	4580	208	316	4550	<b>315</b>	<b>4550</b>	313	4580

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

irqbalance disabled with "service irqbalance stop"

tuned profile set with "tuned-adm profile throughput-performance"

VM Dirty ratio was set to 40 using "echo 40 > /proc/sys/vm/dirty\_ratio"

Numa balancing was disabled using "echo 0 > /proc/sys/kernel numa\_balancing"

## Platform Notes

### BIOS Configuration:

Thermal Configuration set to Maximum Cooling

LLC Prefetch set to Enabled

LLC Dead Line Allocation set to Disabled

Stale A to S set to Enabled

Memory Patrol Scrubbing set to Disabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C1E State

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

**SPECint\_rate2006 = 4450**

**SPECint\_rate\_base2006 = 4290**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

Sysinfo program /cpu2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on DL560-Gen10 Wed Nov 22 13:34:51 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
        4 "physical id"s (chips)
        208 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 26
    siblings : 52
    physical 0: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27
    28 29
    physical 1: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27
    28 29
    physical 2: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27
    28 29
    physical 3: cores 0 1 2 3 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27
    28 29
    cache size : 36608 KB
```

```
From /proc/meminfo
    MemTotal:       792052752 kB
    HugePages_Total:      0
    Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.3 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.3"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:
Linux DL560-Gen10 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 22 13:32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

**SPECint\_rate2006 = 4450**

**SPECint\_rate\_base2006 = 4290**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Platform Notes (Continued)

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	xfs	447G	46G	402G	11%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U34 09/29/2017

Memory:

48x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/lib/ia32:/cpu2006/lib/intel64:/cpu2006/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.htm>.

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

**SPECint\_rate2006 = 4450**

**SPECint\_rate\_base2006 = 4290**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Base Compiler Invocation (Continued)

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hammer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
400.perlbench: icc -m64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

**SPECint\_rate2006 = 4450**

**SPECint\_rate\_base2006 = 4290**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-D_FILE_OFFSET_BITS=64`

429.mcf: `-D_FILE_OFFSET_BITS=64`

445.gobmk: `-D_FILE_OFFSET_BITS=64`

456.hmmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

464.h264ref: `-D_FILE_OFFSET_BITS=64`

471.omnetpp: `-D_FILE_OFFSET_BITS=64`

473.astar: `-D_FILE_OFFSET_BITS=64`

483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)`  
`-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)`  
`-no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3`

401.bzip2: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)`  
`-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)`  
`-no-prec-div(pass 2) -qopt-prefetch -auto-ilp32`  
`-qopt-mem-layout-trans=3`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`  
`-qopt-mem-layout-trans=3`

429.mcf: `basepeak = yes`

445.gobmk: `-prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)`  
`-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)`  
`-no-prec-div(pass 2) -qopt-mem-layout-trans=3`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

**SPECint\_rate2006 = 4450**

**SPECint\_rate\_base2006 = 4290**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
-qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll14 -auto-ilp32  
-qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll12 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2)  
-qopt-ra-region-strategy=block  
-qopt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>  
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>  
<http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>



# SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen10

(2.10 GHz, Intel Xeon Platinum 8170)

**SPECint\_rate2006 = 4450**

**SPECint\_rate\_base2006 = 4290**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Nov-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Apr-2017

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 14 11:29:33 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 13 June 2018.