



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECSspeed2017_int_base = 8.64

SPECSspeed2017_int_peak = 8.89

CPU2017 License: 9046


Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Sep-2017

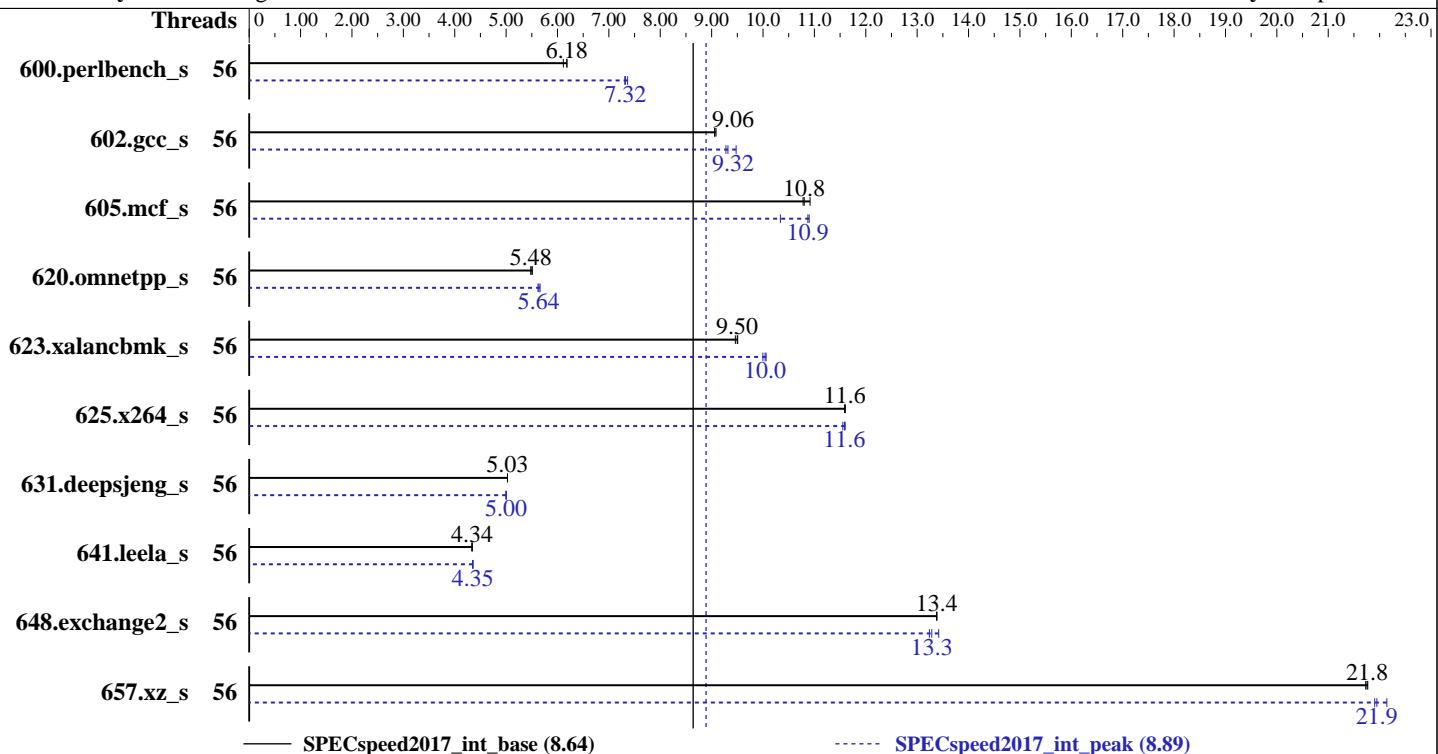

Hardware		Software	
CPU Name:	Intel Xeon Gold 6132	OS:	Red Hat Enterprise Linux Server release 7.3 (Maipo) 3.10.0-514.el7.x86_64
Max MHz.:	3700	Compiler:	C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux; Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Nominal:	2600	Parallel:	Yes
Enabled:	28 cores, 2 chips, 2 threads/core	Firmware:	American Megatrends Inc. BIOS Version 0JGST024 released Nov-2017
Orderable:	1,2 chips	File System:	xfs
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	Run level 3 (Multi User)
L2:	1 MB I+D on chip per core	Base Pointers:	64-bit
L3:	19.25 MB I+D on chip per chip	Peak Pointers:	32/64-bit
Other:	None	Other:	jemalloc: jemalloc memory allocator library V5.0.1; jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets; jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5; jemalloc: sources available from jemalloc.net or releases
Memory:	384 GB (12 x 32 GB 2Rx8 PC4-2667V-R)		
Storage:	1 x 1.0 TB SATA, 7200 RPM		
Other:	None		



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECSpeed2017_int_base = 8.64

SPECSpeed2017_int_peak = 8.89

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Sep-2017

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	56	290	6.11	287	6.18	287	6.18	56	242	7.32	243	7.31	241	7.36		
602.gcc_s	56	440	9.06	440	9.06	438	9.09	56	429	9.28	427	9.32	420	9.48		
605.mcf_s	56	437	10.8	438	10.8	432	10.9	56	433	10.9	434	10.9	457	10.3		
620.omnetpp_s	56	297	5.48	297	5.48	296	5.51	56	289	5.64	288	5.66	290	5.62		
623.xalancbmk_s	56	150	9.46	149	9.51	149	9.50	56	142	10.0	141	10.0	141	10.1		
625.x264_s	56	152	11.6	152	11.6	152	11.6	56	153	11.6	152	11.6	152	11.6		
631.deepsjeng_s	56	285	5.03	285	5.03	285	5.03	56	287	5.00	287	5.00	287	5.00		
641.leela_s	56	393	4.34	393	4.34	394	4.33	56	392	4.35	392	4.35	392	4.35		
648.exchange2_s	56	220	13.4	220	13.4	220	13.4	56	222	13.2	219	13.4	221	13.3		
657.xz_s	56	285	21.7	284	21.8	284	21.8	56	282	21.9	279	22.1	282	21.9		
SPECSpeed2017_int_base =				8.64												
SPECSpeed2017_int_peak =				8.89												

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/tianyan/benchmarks/cpu2017/lib/ia32:/home/tianyan/benchmarks/cpu2017/lib/intel64:/home/tianyan/benchmarks/cpu2017/je5.0.1-32:/home/tianyan/benchmarks/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

Platform Notes

Sysinfo program /home/tianyan/benchmarks/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost Sat Dec 9 05:06:17 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_int_base = 8.64

SPECspeed2017_int_peak = 8.89

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Sep-2017

Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
  2 "physical id"s (chips)
  56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 14
siblings   : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:  0-55
Thread(s) per core:   2
Core(s) per socket:   14
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
Stepping:               4
CPU MHz:                2601.000
BogoMIPS:              5205.14
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                19712K
NUMA node0 CPU(s):    0-13,28-41
NUMA node1 CPU(s):    14-27,42-55
```

```
/proc/cpuinfo cache data
cache size : 19712 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 28 29 30 31 32 33 34 35 36 37 38 39 40 41
node 0 size: 195245 MB
node 0 free: 182957 MB
node 1 cpus: 14 15 16 17 18 19 20 21 22 23 24 25 26 27 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 196608 MB
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_int_base = 8.64

SPECspeed2017_int_peak = 8.89

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Sep-2017

Platform Notes (Continued)

```
node 1 free: 188347 MB
node distances:
node   0   1
 0: 10 21
 1: 21 10

From /proc/meminfo
MemTotal:      394687848 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:
Linux localhost 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Dec 8 21:11

SPEC is set to: /home/tianywan/benchmarks/cpu2017
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   671G   36G   635G   6% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS American Megatrends Inc. 0JGST024 11/15/2017American Megatrends Inc. 0JGST024
11/15/2017
Memory:
24x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666
24x NO DIMM NO DIMM

(End of data from sysinfo program)
The dmidecode infomation displayed in sysinfo should have one line reading as:
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_int_base = 8.64

SPECspeed2017_int_peak = 8.89

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Sep-2017

Platform Notes (Continued)

12x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz

Compiler Version Notes

```
=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
peak) 657.xz_s(base)
```

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
```

```
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
641.leela_s(base)
```

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)
641.leela_s(peak)
```

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====
FC 648.exchange2_s(base, peak)
```

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_int_base = 8.64

SPECspeed2017_int_peak = 8.89

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64

602.gcc_s: -DSPEC_LP64

605.mcf_s: -DSPEC_LP64

620.omnetpp_s: -DSPEC_LP64

623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX

625.x264_s: -DSPEC_LP64

631.deepsjeng_s: -DSPEC_LP64

641.leela_s: -DSPEC_LP64

648.exchange2_s: -DSPEC_LP64

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

-L/usr/local/je5.0.1-64/lib -ljemalloc



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_int_base = 8.64

SPECspeed2017_int_peak = 8.89

CPU2017 License: 9046

Test Sponsor: Sugon

Tested by: Sugon

Test Date: Dec-2017

Hardware Availability: Dec-2017

Software Availability: Sep-2017

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_int_base = 8.64

SPECspeed2017_int_peak = 8.89

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

600.perlbench_s (continued):

```
-DSPEC_OPENMP -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

623.xalancbmk_s: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-32/lib -ljemalloc

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: Same as 620.omnetpp_s

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECspeed2017_int_base = 8.64

SPECspeed2017_int_peak = 8.89

CPU2017 License: 9046

Test Date: Dec-2017

Test Sponsor: Sugon

Hardware Availability: Dec-2017

Tested by: Sugon

Software Availability: Sep-2017

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks (except as noted below):

-m64

623.xalancbmk_s: -m32

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Sugon-Purley-Platform-Settings-revA-I.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Sugon-Purley-Platform-Settings-revA-I.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-08 16:06:17-0500.

Report generated on 2018-10-31 14:10:32 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.