



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 217

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175


Test Date: Mar-2019

Test Sponsor: Huawei

Hardware Availability: Apr-2019

Tested by: Huawei

Software Availability: Dec-2018

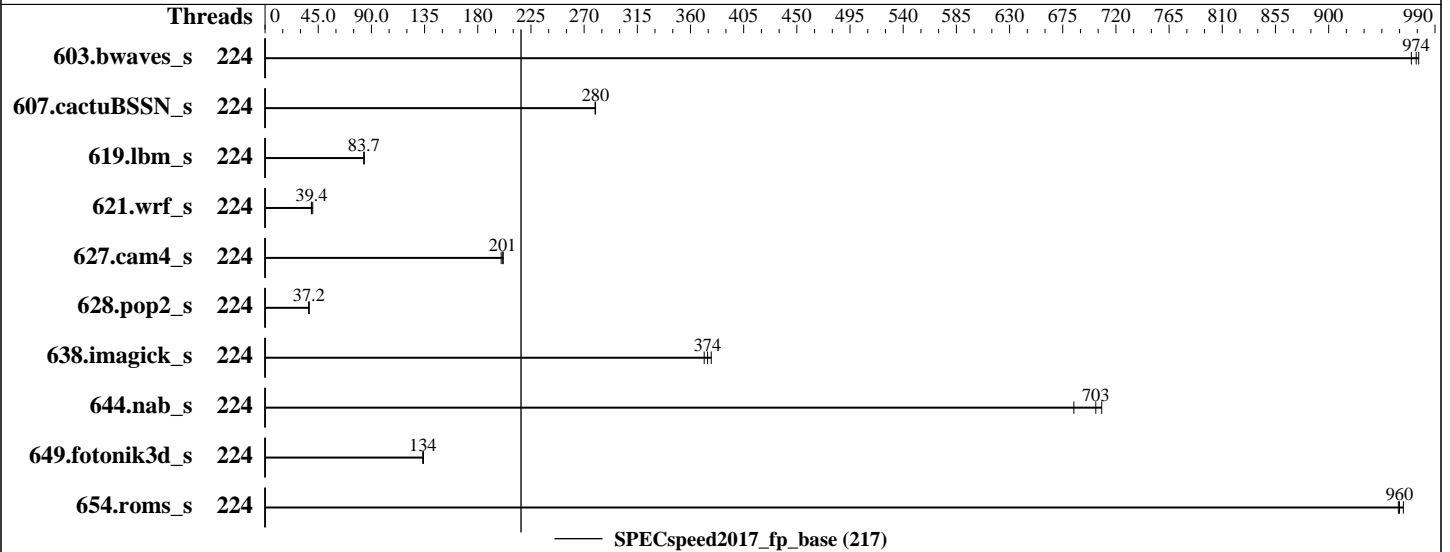

Hardware

CPU Name: Intel Xeon Platinum 8280
 Max MHz.: 4000
 Nominal: 2700
 Enabled: 224 cores, 8 chips
 Orderable: 2,4,6,8 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 2 x 900 GB SAS HDD 10K RPM, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4
 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++
 Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran
 Compiler Build 20181018 for Linux
 Parallel: Yes
 Firmware: Version 9.25 released Feb-2019
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 217

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	224	60.4	976	60.6	974	60.8	970							
607.cactuBSSN_s	224	59.6	280	59.6	280	59.7	279							
619.lbm_s	224	62.5	83.8	62.6	83.7	62.6	83.7							
621.wrf_s	224	328	40.4	335	39.4	337	39.2							
627.cam4_s	224	44.4	200	44.0	202	44.1	201							
628.pop2_s	224	319	37.2	319	37.2	320	37.0							
638.imagick_s	224	38.8	372	38.5	374	38.2	378							
644.nab_s	224	24.9	703	25.5	684	24.7	708							
649.fotonik3d_s	224	68.2	134	68.3	134	68.0	134							
654.roms_s	224	16.3	963	16.4	960	16.4	959							

SPECspeed2017_fp_base = 217

SPECspeed2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa_balancing"

General Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"
OMP_STACKSIZE = "192M"
```

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 217

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Sub NUMA Cluster (SNC) set to Disable
IMC (Integrated memory controller) Interleaving set to Auto
Xtended Prediction Table (XPT) Prefetch set to Enable
Memory Patrol Scrub set to Disable
Last Level Cache (LLC) Prefetch set to Disable
Hyper-Threading Set to Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-2yo1 Thu Mar 7 10:34:46 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
 8 "physical id"s (chips)
224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:
Architecture: x86_64

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 217

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Platform Notes (Continued)

```

CPU op-mode(s):      32-bit, 64-bit
Byte Order:          Little Endian
CPU(s):              224
On-line CPU(s) list: 0-223
Thread(s) per core: 1
Core(s) per socket: 28
Socket(s):           8
NUMA node(s):       8
Vendor ID:           GenuineIntel
CPU family:          6
Model:               85
Model name:          Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:            6
CPU MHz:             2700.000
CPU max MHz:         4000.0000
CPU min MHz:         1000.0000
BogoMIPS:            5400.00
Virtualization:     VT-x
L1d cache:          32K
L1i cache:          32K
L2 cache:           1024K
L3 cache:           39424K
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111
NUMA node4 CPU(s): 112-139
NUMA node5 CPU(s): 140-167
NUMA node6 CPU(s): 168-195
NUMA node7 CPU(s): 196-223
Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 217

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Platform Notes (Continued)

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 191864 MB
node 0 free: 188754 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 193522 MB
node 1 free: 190796 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 2 size: 193522 MB
node 2 free: 190740 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 193493 MB
node 3 free: 190772 MB
node 4 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129
130 131 132 133 134 135 136 137 138 139
node 4 size: 193522 MB
node 4 free: 189139 MB
node 5 cpus: 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157
158 159 160 161 162 163 164 165 166 167
node 5 size: 193522 MB
node 5 free: 190800 MB
node 6 cpus: 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185
186 187 188 189 190 191 192 193 194 195
node 6 size: 193522 MB
node 6 free: 190793 MB
node 7 cpus: 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213
214 215 216 217 218 219 220 221 222 223
node 7 size: 193298 MB
node 7 free: 190574 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  31  21  21  21  31  31  31
1:  31  10  21  21  31  21  31  31
2:  21  21  10  31  31  31  21  31
3:  21  21  31  10  31  31  31  21
4:  21  31  31  31  10  21  31  21
5:  31  21  31  31  21  10  21  31
6:  31  31  21  31  31  21  10  21
7:  31  31  31  21  21  31  21  10

```

```

From /proc/meminfo
MemTotal:      1583381868 kB
HugePages_Total:    10240
Hugepagesize:    2048 kB

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 217

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Platform Notes (Continued)

```

/usr/bin/lsb_release -d
    SUSE Linux Enterprise Server 12 SP4

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 4
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP4"
    VERSION_ID="12.4"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp4"

uname -a:
    Linux linux-2yo1 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
    x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Mar 7 10:04

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4       xfs   1.6T   51G  1.5T   4% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS INSYDE Corp. 9.25 02/15/2019
Memory:
  48x NO DIMM NO DIMM
  48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

```

Compiler Version Notes

```

=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
=====

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 217

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175
Test Sponsor: Huawei
Tested by: Huawei

Test Date: Mar-2019
Hardware Availability: Apr-2019
Software Availability: Dec-2018

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 607.cactuBSSN_s(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 217

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```




SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017_fp_base = 217

Huawei Kunlun 9008 V5 (Intel Xeon Platinum 8280)

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Mar-2019

Hardware Availability: Apr-2019

Software Availability: Dec-2018

Base Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2019-03-06 21:34:46-0500.

Report generated on 2019-04-02 17:01:44 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.