



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL325 Gen10

(2.80 GHz, AMD EPYC 7402P)

SPECspeed®2017\_fp\_base = 91.5

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Jun-2019

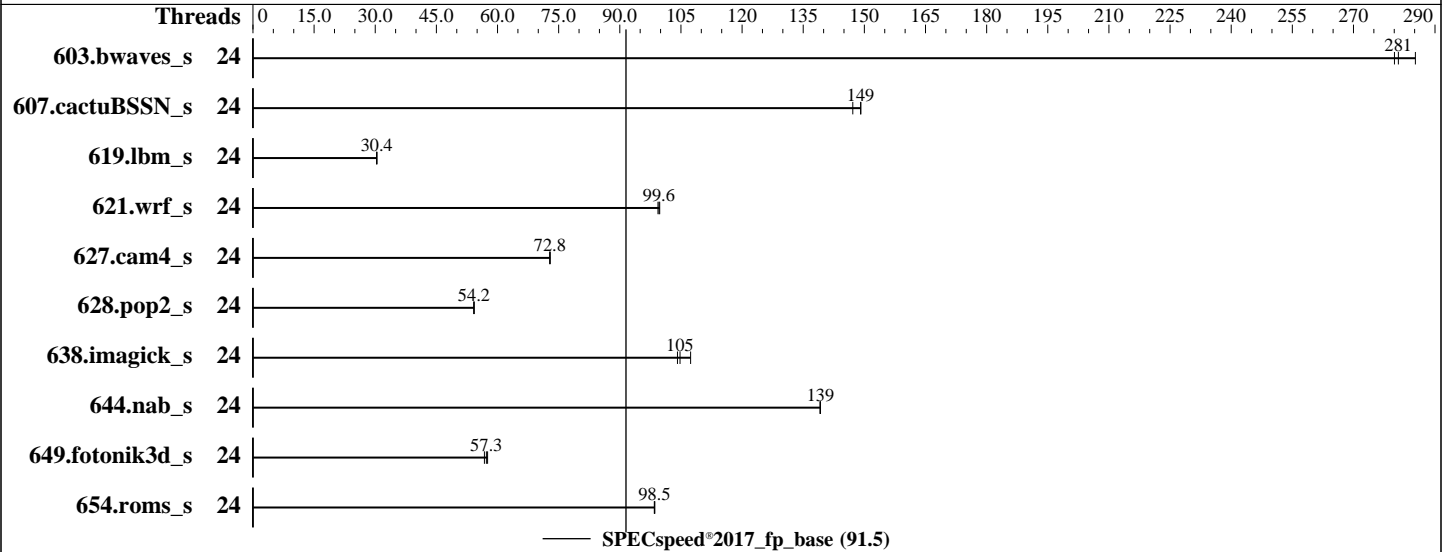

### Hardware

CPU Name: AMD EPYC 7402P  
 Max MHz: 3350  
 Nominal: 2800  
 Enabled: 24 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip,  
 16 MB shared / 3 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 400 GB NVMe SSD, RAID 0  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64) SP1  
 Kernel 4.12.14-195-default  
 Compiler: C/C++: Version 1.3.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: Yes  
 Firmware: HPE BIOS Version A41 07/20/2019 released Aug-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc: jemalloc memory allocator library v5.1.0;  
 Power Management: --



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.80 GHz, AMD EPYC 7402P)

SPECspeed®2017\_fp\_base = 91.5

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Jun-2019

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	207	285	211	280	<b>210</b>	<b>281</b>							
607.cactuBSSN_s	24	<b>112</b>	<b>149</b>	112	149	113	147							
619.lbm_s	24	172	30.4	173	30.4	<b>172</b>	<b>30.4</b>							
621.wrf_s	24	<b>133</b>	<b>99.6</b>	133	99.8	133	99.4							
627.cam4_s	24	<b>122</b>	<b>72.8</b>	122	72.9	122	72.8							
628.pop2_s	24	<b>219</b>	<b>54.2</b>	219	54.3	219	54.2							
638.imagick_s	24	<b>138</b>	<b>105</b>	134	107	139	104							
644.nab_s	24	<b>125</b>	<b>139</b>	126	139	125	139							
649.fotonik3d_s	24	158	57.6	<b>159</b>	<b>57.3</b>	161	56.8							
654.roms_s	24	160	98.6	160	98.5	<b>160</b>	<b>98.5</b>							

SPECspeed®2017\_fp\_base = 91.5

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers with gfortran. It is available here: <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL325 Gen10**

**(2.80 GHz, AMD EPYC 7402P)**

SPECspeed®2017\_fp\_base = 91.5

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Aug-2019  
**Hardware Availability:** Aug-2019  
**Software Availability:** Jun-2019

## Operating System Notes (Continued)

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/amd\_speed\_aoccl30\_naples\_A\_lib/64:/home/cpu2017/amd\_speed\_aoccl30\_naples\_A\_lib/32:"  
OMP\_DYNAMIC = "false"  
OMP\_PLACES = "cores"  
OMP\_PROC\_BIND = "close"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "192M"  
OMP\_WAIT\_POLICY = "active"

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Configuration  
Thermal Configuration set to Maximum Cooling  
SMT Mode set to Disabled  
Determinism Control set to Manual  
Performance Determinism set to Power Deterministic  
Minimum Processor Idle Power core C-State set to C6 State  
Memory Patrol Scrubbing set to Disabled  
Workload Profile set to General Peak Frequency Compute  
NUMA memory domains per socket set to Four memory domains per socket  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-20xx Thu Feb 14 11:31:08 2019

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.80 GHz, AMD EPYC 7402P)

SPECspeed®2017\_fp\_base = 91.5

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Jun-2019

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7402P 24-Core Processor

1 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 24

physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

Address sizes: 48 bits physical, 48 bits virtual

CPU(s): 24

On-line CPU(s) list: 0-23

Thread(s) per core: 1

Core(s) per socket: 24

Socket(s): 1

NUMA node(s): 4

Vendor ID: AuthenticAMD

CPU family: 23

Model: 49

Model name: AMD EPYC 7402P 24-Core Processor

Stepping: 0

CPU MHz: 2800.000

CPU max MHz: 2800.0000

CPU min MHz: 1500.0000

BogoMIPS: 5589.75

Virtualization: AMD-V

L1d cache: 32K

L1i cache: 32K

L2 cache: 512K

L3 cache: 16384K

NUMA node0 CPU(s): 0-5

NUMA node1 CPU(s): 6-11

NUMA node2 CPU(s): 12-17

NUMA node3 CPU(s): 18-23

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm

constant\_tsc rep\_good nopl xtopology nonstop\_tsc cpuid extd\_apicid aperfmperf pni

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.80 GHz, AMD EPYC 7402P)

SPECspeed®2017\_fp\_base = 91.5

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Jun-2019

## Platform Notes (Continued)

```
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext perfctr_l2 mwaitx cpb
cat_l3 cdp_l3 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 64292 MB
node 0 free: 64062 MB
node 1 cpus: 6 7 8 9 10 11
node 1 size: 64510 MB
node 1 free: 64327 MB
node 2 cpus: 12 13 14 15 16 17
node 2 size: 64510 MB
node 2 free: 64365 MB
node 3 cpus: 18 19 20 21 22 23
node 3 size: 64468 MB
node 3 free: 64370 MB
node distances:
node  0  1  2  3
 0:  10  12  12  12
 1:  12  10  12  12
 2:  12  12  10  12
 3:  12  12  12  10
```

```
From /proc/meminfo
MemTotal:      263968224 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.80 GHz, AMD EPYC 7402P)

SPECspeed®2017\_fp\_base = 91.5

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2019

**Hardware Availability:** Aug-2019

**Software Availability:** Jun-2019

## Platform Notes (Continued)

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

```
Linux linux-20xx 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional, IBRS\_FW, STIBP: disabled, RSB filling

run-level 3 Feb 14 08:21

SPEC is set to: /home/cpu2017

```
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/nvme0n1p1  btrfs    373G      34G  338G   9% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A41 07/20/2019

Memory:

8x UNKNOWN NOT AVAILABLE

8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)  
=====
```

```
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins  
AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin

```
=====  
C++, C, Fortran | 607.cactuBSSN_s(base)  
=====
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL325 Gen10**

**(2.80 GHz, AMD EPYC 7402P)**

**SPECspeed®2017\_fp\_base = 91.5**

**SPECspeed®2017\_fp\_peak = Not Run**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2019

**Hardware Availability:** Aug-2019

**Software Availability:** Jun-2019

## Compiler Version Notes (Continued)

```
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
```

```
=====
Fortran          | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
=====
```

```
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
```

```
=====
Fortran, C       | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
=====
```

```
GNU Fortran (GCC) 4.8.2
Copyright (C) 2013 Free Software Foundation, Inc.
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.
You may redistribute copies of GNU Fortran
under the terms of the GNU General Public License.
For more information about these matters, see the file named COPYING
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
  AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aoccl.3.0/AOCC-1.3.0-Compiler/bin
=====
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.80 GHz, AMD EPYC 7402P)

SPECspeed®2017\_fp\_base = 91.5

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2019

**Hardware Availability:** Aug-2019

**Software Availability:** Jun-2019

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64

627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

628.pop2\_s: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-flto -Wl,-plugin-opt=-merge-constant

-Wl,-plugin-opt=-lsr-in-nested-loop

-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math

-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50

-fremap-arrays -mllvm -inline-threshold=1000

-flv-function-specialization -mllvm -enable-gvn-hoist

-mllvm -function-specialize -z muldefs -DSPEC\_OPENMP -fopenmp

-DUSE\_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -ljemalloc

-lamdlibm

Fortran benchmarks:

-flto -Wl,-plugin-opt=-merge-constant

-Wl,-plugin-opt=-lsr-in-nested-loop

-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -mavx -madx

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.80 GHz, AMD EPYC 7402P)

SPECspeed®2017\_fp\_base = 91.5

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2019

**Hardware Availability:** Aug-2019

**Software Availability:** Jun-2019

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-funroll-loops -ffast-math -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-DSPEC_OPENMP -DUSE_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread
-ldl -ljemalloc -lamdlibm -lgfortran
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -mavx -madox -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-DSPEC_OPENMP -DUSE_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread
-ldl -ljemalloc -lamdlibm -lgfortran
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compares=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -enable-vectorize-compares=false -mavx
-madox -funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compares:false
-DSPEC_OPENMP -fopenmp -DUSE_OPENMP -fopenmp=libomp -lomp -lpthread
-ldl -ljemalloc -lamdlibm
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL325 Gen10

(2.80 GHz, AMD EPYC 7402P)

SPECspeed®2017\_fp\_base = 91.5

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Aug-2019

**Hardware Availability:** Aug-2019

**Software Availability:** Jun-2019

## Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2-HPE.html>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2-HPE.xml>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-02-14 12:31:07-0500.

Report generated on 2019-10-02 12:03:56 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.