



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5215M, 2.50GHz)

SPECspeed®2017\_fp\_base = 90.0

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

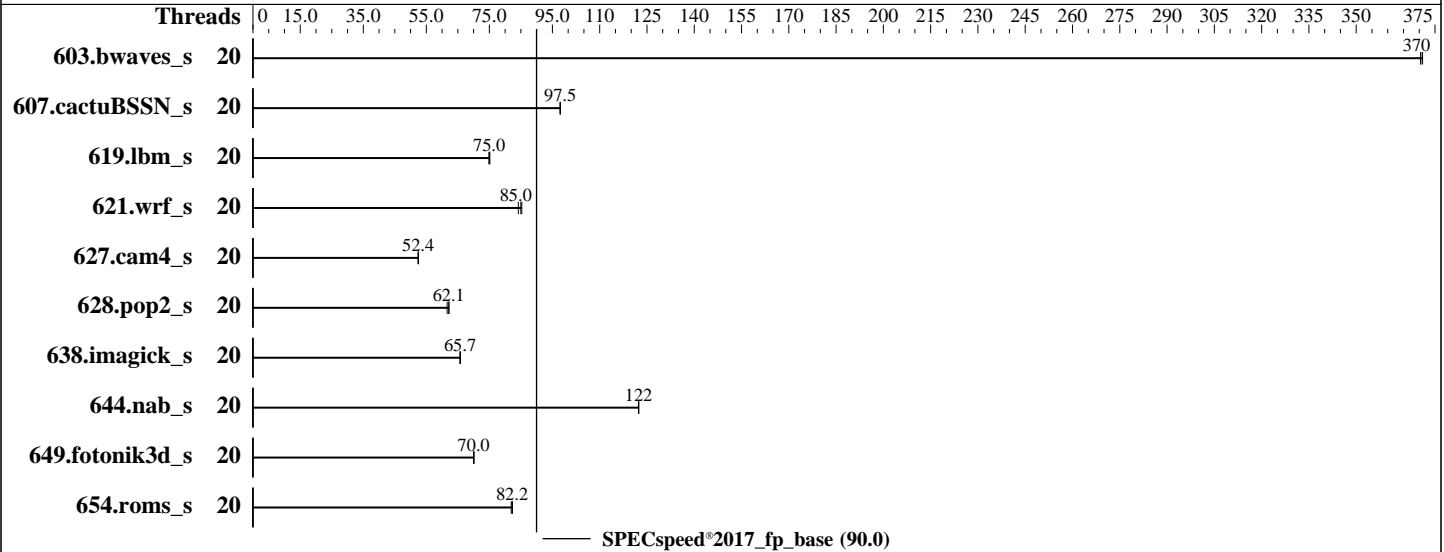

### Hardware

CPU Name: Intel Xeon Gold 5215M  
 Max MHz: 3400  
 Nominal: 2500  
 Enabled: 20 cores, 2 chips  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 13.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933V-R, running at 2666)  
 Storage: 1 x 960 GB SATA M.2 SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64) 4.12.14-23-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Version 4.0.4b released Apr-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5215M, 2.50GHz)

SPECspeed®2017\_fp\_base = 90.0

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Aug-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
603.bwaves_s	20	159	370	<b><u>159</u></b>	<b><u>370</u></b>	159	371									
607.cactuBSSN_s	20	<b><u>171</u></b>	<b><u>97.5</u></b>	171	97.5	171	97.5									
619.lbm_s	20	69.7	75.2	70.0	74.9	<b><u>69.8</u></b>	<b><u>75.0</u></b>									
621.wrf_s	20	157	84.2	155	85.3	<b><u>156</u></b>	<b><u>85.0</u></b>									
627.cam4_s	20	169	52.4	169	52.5	<b><u>169</u></b>	<b><u>52.4</u></b>									
628.pop2_s	20	193	61.6	191	62.2	<b><u>191</u></b>	<b><u>62.1</u></b>									
638.imagick_s	20	219	65.8	<b><u>219</u></b>	<b><u>65.7</u></b>	220	65.7									
644.nab_s	20	143	122	143	122	<b><u>143</u></b>	<b><u>122</u></b>									
649.fotonik3d_s	20	130	70.0	130	70.1	<b><u>130</u></b>	<b><u>70.0</u></b>									
654.roms_s	20	191	82.3	192	81.9	<b><u>191</u></b>	<b><u>82.2</u></b>									

SPECspeed®2017\_fp\_base = **90.0**

SPECspeed®2017\_fp\_peak = **Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64"
OMP_STACKSIZE = "192M"
```

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

Intel HyperThreading Technology set to Disabled  
CPU performance set to Enterprise  
Power Performance Tuning set to OS Controls

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5215M, 2.50GHz)

SPECspeed®2017\_fp\_base = 90.0

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Aug-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Platform Notes (Continued)

SNC set to Disabled  
 IMC Interleaving set to Auto  
 Patrol Scrub set to Disabled  
 Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
 running on linux-3xnd Fri Sep 6 15:49:15 2019

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 5215M CPU @ 2.50GHz
 2 "physical id"s (chips)
 20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 10
  siblings     : 10
 physical 0:   cores 0 1 2 3 4 8 9 10 11 12
 physical 1:   cores 0 1 2 3 4 8 9 10 11 12
```

```
From lscpu:
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            20
On-line CPU(s) list: 0-19
Thread(s) per core: 1
Core(s) per socket: 10
Socket(s):         2
NUMA node(s):     2
Vendor ID:        GenuineIntel
CPU family:        6
Model:            85
Model name:        Intel(R) Xeon(R) Gold 5215M CPU @ 2.50GHz
Stepping:         6
CPU MHz:          2500.000
CPU max MHz:      3400.0000
CPU min MHz:      1000.0000
BogoMIPS:         5000.00
Virtualization:    VT-x
L1d cache:        32K
L1i cache:        32K
L2 cache:         1024K
L3 cache:         14080K
NUMA node0 CPU(s): 0-9
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5215M, 2.50GHz)

SPECspeed®2017\_fp\_base = 90.0

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Aug-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```
NUMA node1 CPU(s): 10-19
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpelgb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cdp_l3 invpcid_single intel_ppin mba tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
ibpb ibrs stibp dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni arch_capabilities ssbd
```

```
/proc/cpuinfo cache data
cache size : 14080 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9
node 0 size: 385589 MB
node 0 free: 380097 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19
node 1 size: 387046 MB
node 1 free: 382942 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal: 791179536 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="/o:suse:sles:15"
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5215M, 2.50GHz)

SPECspeed®2017\_fp\_base = 90.0

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Aug-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```
uname -a:
Linux linux-3xnd 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 6 08:35
```

```
SPEC is set to: /home/cpu2017
```

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb4       xfs   100G   19G   81G   19% /home
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Cisco Systems, Inc. B200M5.4.0.4b.0.0407191258 04/07/2019
```

```
Memory:
```

```
24x 0xCE00 M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2666
```

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
```

```
-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====  
C++, C, Fortran | 607.cactuBSSN_s(base)
```

```
-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416
```

```
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
```

```
=====  
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5215M, 2.50GHz)

SPECspeed®2017\_fp\_base = 90.0

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Compiler Version Notes (Continued)

```
-----
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C      | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
  Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M5 (Intel Xeon Gold 5215M, 2.50GHz)

SPECspeed®2017\_fp\_base = 90.0

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Aug-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

## Base Portability Flags (Continued)

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP

Fortran benchmarks:

-DSPEC\_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-nostandard-realloc-lhs

Benchmarks using both Fortran and C:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.2019-07-31.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.2019-07-31.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.2 on 2019-09-06 18:49:14-0400.

Report generated on 2020-07-02 20:41:11 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.