



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019C-WR (X11SCW-F , Intel Pentium Gold G5500T)

SPECspeed®2017\_fp\_base = 12.0

SPECspeed®2017\_fp\_peak = 13.0

CPU2017 License: 001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Oct-2019

Hardware Availability: Nov-2018

Software Availability: Sep-2018

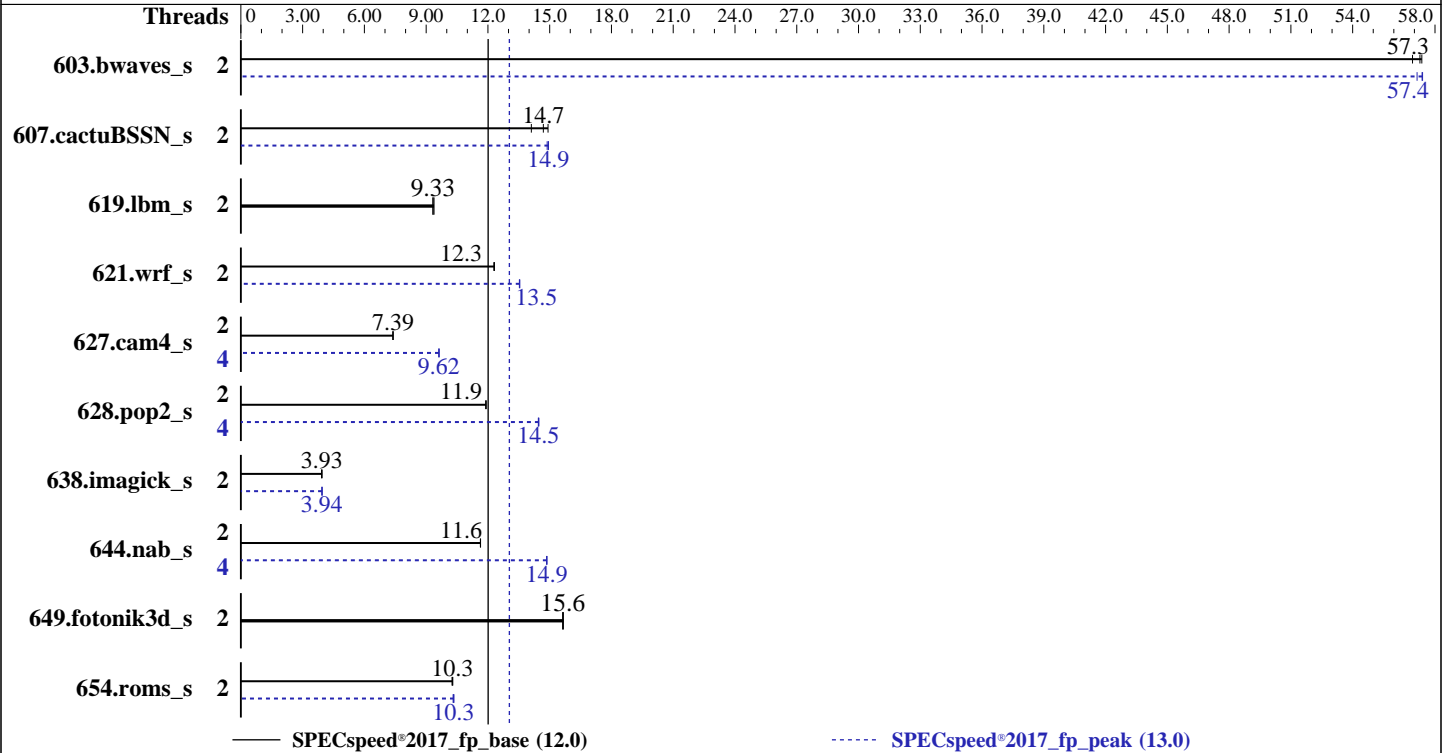

### Hardware

CPU Name: Intel Pentium Gold G5500T  
 Max MHz: 3200  
 Nominal: 3200  
 Enabled: 2 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 4 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400)  
 Storage: 1 x 200 GB SATA III SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
 Kernel 4.4.114-94.11-default  
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Version 1.0b released May-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019C-WR (X11SCW-F , Intel Pentium Gold G5500T)

SPECspeed®2017\_fp\_base = 12.0

SPECspeed®2017\_fp\_peak = 13.0

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Oct-2019  
Hardware Availability: Nov-2018  
Software Availability: Sep-2018

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	2	<b>1030</b>	<b>57.3</b>	1037	56.9	1029	57.4	2	1033	57.1	<b>1028</b>	<b>57.4</b>	1028	57.4
607.cactuBSSN_s	2	1182	14.1	<b>1135</b>	<b>14.7</b>	1117	14.9	2	1121	14.9	1116	14.9	<b>1116</b>	<b>14.9</b>
619.lbm_s	2	558	9.38	<b>561</b>	<b>9.33</b>	561	9.33	2	558	9.38	<b>561</b>	<b>9.33</b>	561	9.33
621.wrf_s	2	1076	12.3	1074	12.3	<b>1074</b>	<b>12.3</b>	2	978	13.5	<b>977</b>	<b>13.5</b>	976	13.5
627.cam4_s	2	1199	7.39	1199	7.39	<b>1199</b>	<b>7.39</b>	4	921	9.62	921	9.62	<b>921</b>	<b>9.62</b>
628.pop2_s	2	<b>997</b>	<b>11.9</b>	998	11.9	997	11.9	4	820	14.5	822	14.5	<b>821</b>	<b>14.5</b>
638.imagick_s	2	3681	3.92	<b>3673</b>	<b>3.93</b>	3658	3.94	2	3661	3.94	3657	3.94	<b>3661</b>	<b>3.94</b>
644.nab_s	2	1501	11.6	<b>1501</b>	<b>11.6</b>	1502	11.6	4	1176	14.9	<b>1176</b>	<b>14.9</b>	1176	14.9
649.fotonik3d_s	2	583	15.6	<b>583</b>	<b>15.6</b>	582	15.7	2	583	15.6	<b>583</b>	<b>15.6</b>	582	15.7
654.roms_s	2	1535	10.3	<b>1532</b>	<b>10.3</b>	1530	10.3	2	1527	10.3	<b>1524</b>	<b>10.3</b>	1521	10.4

SPECspeed®2017\_fp\_base = **12.0**

SPECspeed®2017\_fp\_peak = **13.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019C-WR (X11SCW-F , Intel Pentium Gold G5500T)

SPECspeed®2017\_fp\_base = 12.0

SPECspeed®2017\_fp\_peak = 13.0

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2018  
**Software Availability:** Sep-2018

### Platform Notes (Continued)

running on linux-65nv Sun Oct 6 21:31:37 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Pentium(R) Gold G5500T CPU @ 3.20GHz
 1 "physical id"s (chips)
 4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 2
siblings : 4
physical 0: cores 0 1
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 4
On-line CPU(s) list: 0-3
Thread(s) per core: 2
Core(s) per socket: 2
Socket(s): 1
NUMA node(s): 1
Vendor ID: GenuineIntel
CPU family: 6
Model: 158
Model name: Intel(R) Pentium(R) Gold G5500T CPU @ 3.20GHz
Stepping: 11
CPU MHz: 3200.012
CPU max MHz: 3200.0000
CPU min MHz: 800.0000
BogoMIPS: 6383.97
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 256K
L3 cache: 4096K
NUMA node0 CPU(s): 0-3
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 sse3 sdbg cx16
xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand
lahf_lm abm 3dnowprefetch arat epb invpcid_single pln pts dtherm hwp hwp_notify
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019C-WR (X11SCW-F , Intel Pentium Gold G5500T)

SPECspeed®2017\_fp\_base = 12.0

SPECspeed®2017\_fp\_peak = 13.0

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2018  
**Software Availability:** Sep-2018

### Platform Notes (Continued)

```
hwp_act_window hwp_epp intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap
clflushopt xsaveopt xsavec xgetbv1
```

```
/proc/cpuinfo cache data
cache size : 4096 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 64333 MB
node 0 free: 44184 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
```

```
MemTotal: 65877980 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
```

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
```

```
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
```

```
Linux linux-65nv 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

```
Kernel self-reported vulnerability status:
```

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Barriers
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019C-WR (X11SCW-F , Intel Pentium Gold G5500T)

SPECspeed®2017\_fp\_base = 12.0

SPECspeed®2017\_fp\_peak = 13.0

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2018  
**Software Availability:** Sep-2018

### Platform Notes (Continued)

run-level 3 Oct 5 14:56

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	145G	31G	114G	22%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0b 05/16/2019

Memory:

4x Micron 18ADF2G72AZ-2G6H1R 16 GB 2 rank 2667, configured at 2400

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
  | 644.nab_s(base, peak)
=====

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
        | 654.roms_s(base, peak)
=====

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019C-WR (X11SCW-F , Intel Pentium Gold G5500T)

SPECspeed®2017\_fp\_base = 12.0

SPECspeed®2017\_fp\_peak = 13.0

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2018  
**Software Availability:** Sep-2018

### Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.0.117 Build 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

### Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019C-WR (X11SCW-F , Intel Pentium Gold G5500T)

SPECspeed®2017\_fp\_base = 12.0

SPECspeed®2017\_fp\_peak = 13.0

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2018  
**Software Availability:** Sep-2018

## Base Portability Flags (Continued)

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP

Fortran benchmarks:

-DSPEC\_OPENMP -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs -align array32byte

Benchmarks using Fortran, C, and C++:

-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs -align array32byte

## Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019C-WR (X11SCW-F , Intel Pentium Gold G5500T)

SPECspeed®2017\_fp\_base = 12.0

SPECspeed®2017\_fp\_peak = 13.0

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Oct-2019  
**Hardware Availability:** Nov-2018  
**Software Availability:** Sep-2018

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC\_OPENMP

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

603.bwaves\_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC\_SUPPRESS\_OPENMP  
-DSPEC\_OPENMP -O2 -xSSE4.2 -qopt-prefetch -ipo -O3  
-no-prec-div -ffinite-math-only -qopt-mem-layout-trans=3  
-qopenmp -nostandard-realloc-lhs -align array32byte

649.fotonik3d\_s: basepeak = yes

654.roms\_s: -DSPEC\_OPENMP -xSSE4.2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3  
-qopenmp -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

621.wrf\_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xSSE4.2  
-qopt-prefetch -ipo -O3 -no-prec-div -ffinite-math-only  
-qopt-mem-layout-trans=3 -DSPEC\_SUPPRESS\_OPENMP -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs -align array32byte

627.cam4\_s: -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC\_OPENMP -nostandard-realloc-lhs -align array32byte

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs -align array32byte





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 5019C-WR (X11SCW-F , Intel Pentium Gold G5500T)

SPECspeed®2017\_fp\_base = 12.0

SPECspeed®2017\_fp\_peak = 13.0

**CPU2017 License:** 001176

**Test Sponsor:** Supermicro

**Tested by:** Supermicro

**Test Date:** Oct-2019

**Hardware Availability:** Nov-2018

**Software Availability:** Sep-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.html>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.2019-01-15.xml>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-10-06 09:31:37-0400.

Report generated on 2019-10-29 16:14:41 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-29.