



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR530
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017_fp_base = 117

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

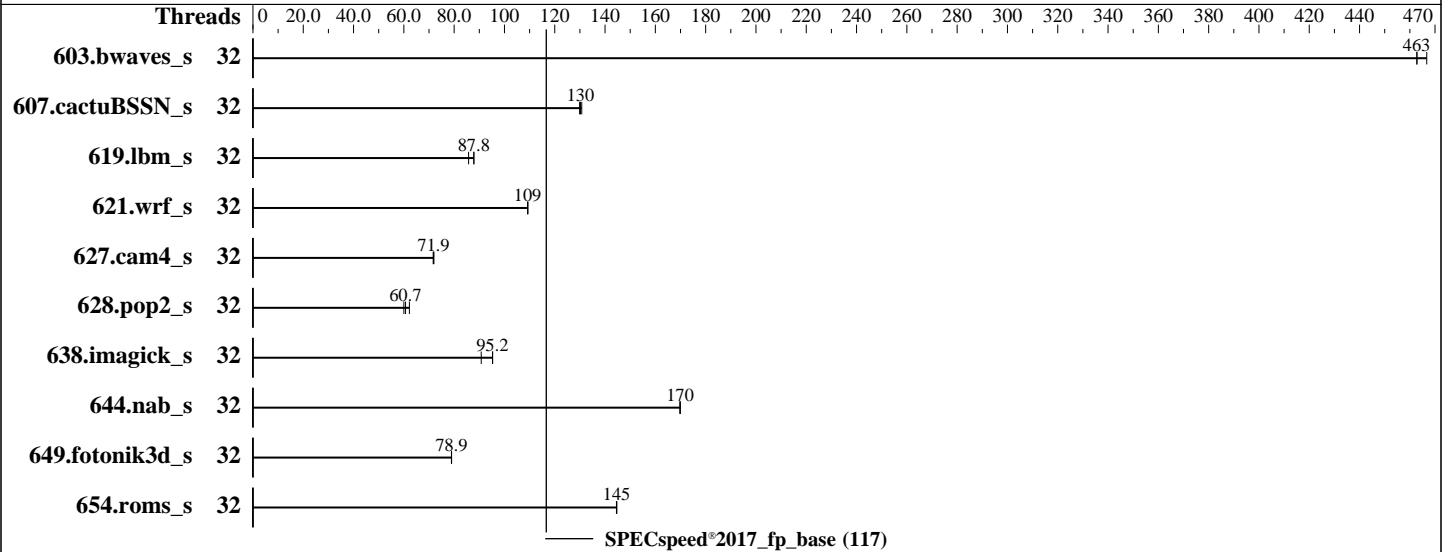

Hardware

CPU Name: Intel Xeon Gold 5218B
 Max MHz: 3900
 Nominal: 2300
 Enabled: 32 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2933Y-R, running at 2666)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86_64)
 Kernel 4.12.14-94.41-default
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.4.227 of Intel Fortran
 Compiler for Linux
 Parallel: Yes
 Firmware: Lenovo BIOS Version TEE142E 2.30 released Aug-2019 tested as TEE141E 2.30 Jul-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: None
 Power Management: Disable



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECSpeed®2017_fp_base = 117

ThinkSystem SR530
(2.30 GHz, Intel Xeon Gold 5218B)

SPECSpeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	<u>127</u>	<u>463</u>	127	463	126	467							
607.cactuBSSN_s	32	128	130	<u>128</u>	<u>130</u>	128	131							
619.lbm_s	32	<u>59.7</u>	<u>87.8</u>	61.1	85.7	59.6	87.9							
621.wrf_s	32	121	109	121	109	<u>121</u>	<u>109</u>							
627.cam4_s	32	124	71.7	123	71.9	<u>123</u>	<u>71.9</u>							
628.pop2_s	32	<u>196</u>	<u>60.7</u>	191	62.2	198	60.0							
638.imagick_s	32	159	90.8	<u>151</u>	<u>95.2</u>	151	95.3							
644.nab_s	32	<u>103</u>	<u>170</u>	103	170	103	170							
649.fotonik3d_s	32	115	79.0	116	78.9	<u>115</u>	<u>78.9</u>							
654.roms_s	32	109	145	<u>109</u>	<u>145</u>	109	145							

SPECSpeed®2017_fp_base = 117

SPECSpeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.0-ic19.0u4/lib/intel64"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR530
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017_fp_base = 117

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

General Notes (Continued)

is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
MONITOR/MWAIT set to Enable
Hyper-Threading set to Disable

sysinfo program /home/cpu2017-1.1.0-ic19.0u4/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-zitb Tue Nov 5 18:27:15 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 16
  siblings     : 16
 physical 0:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
 physical 1:   cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Thread(s) per core:    1
Core(s) per socket:    16
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 5218 CPU @ 2.30GHz
Stepping:              6
CPU MHz:               2300.000
CPU max MHz:           3900.0000
CPU min MHz:           1000.0000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR530
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017_fp_base = 117

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 22528K
NUMA node0 CPU(s): 0-15
NUMA node1 CPU(s): 16-31

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 96318 MB
node 0 free: 95730 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31
node 1 size: 96741 MB
node 1 free: 96356 MB
node distances:
node  0  1
0:  10  21
1:  21  10
```

```
From /proc/meminfo
MemTotal: 197693260 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 117

ThinkSystem SR530
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

```
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux linux-zitb 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:         No status reported
CVE-2017-5754 (Meltdown):                 Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                              via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Indirect Branch Restricted
                                              Speculation, IBPB, IBRS_FW
```

```
run-level 3 Nov 5 18:25
```

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.0u4
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   892G   76G  816G   9% /
```

```
From /sys/devices/virtual/dmi/id
BIOS:      Lenovo  -[TEE141E-2.30]- 07/02/2019
Vendor:    Lenovo
Product:   ThinkSystem SR530  -[7X07RCZ000]-
Product Family: ThinkSystem
Serial:    1234567890
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
12x SK Hynix HMA82GR7CJR8N-WM 16 GB 2 rank 2933, configured at 2666

(End of data from sysinfo program)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 117

ThinkSystem SR530
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Nov-2019
Hardware Availability: Apr-2019
Software Availability: May-2019

Platform Notes (Continued)

The marketing name for the processor in this result, which appears in the CPU name and hardware model areas, is different from sysinfo because a pre-production processor was used. The pre-production processor differs from the production processor in name only.

Compiler Version Notes

=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR530
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017_fp_base = 117

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
```

```
607.cactuBSSN_s: -DSPEC_LP64
```

```
619.lbm_s: -DSPEC_LP64
```

```
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
```

```
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
```

```
-assume byterecl
```

```
638.imagick_s: -DSPEC_LP64
```

```
644.nab_s: -DSPEC_LP64
```

```
649.fotonik3d_s: -DSPEC_LP64
```

```
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
```

```
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
```

```
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

```
-nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 117

ThinkSystem SR530
(2.30 GHz, Intel Xeon Gold 5218B)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Nov-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-05 05:27:14-0500.
Report generated on 2019-11-26 12:51:33 by CPU2017 PDF formatter v6255.
Originally published on 2019-11-26.