



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu


PRIMERGY TX1330 M4, Intel Celeron G4930, 3.20 GHz

SPECspeed®2017\_int\_base = 5.81

SPECspeed®2017\_int\_peak = 6.10

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Dec-2019  
Hardware Availability: Oct-2019  
Software Availability: Sep-2019

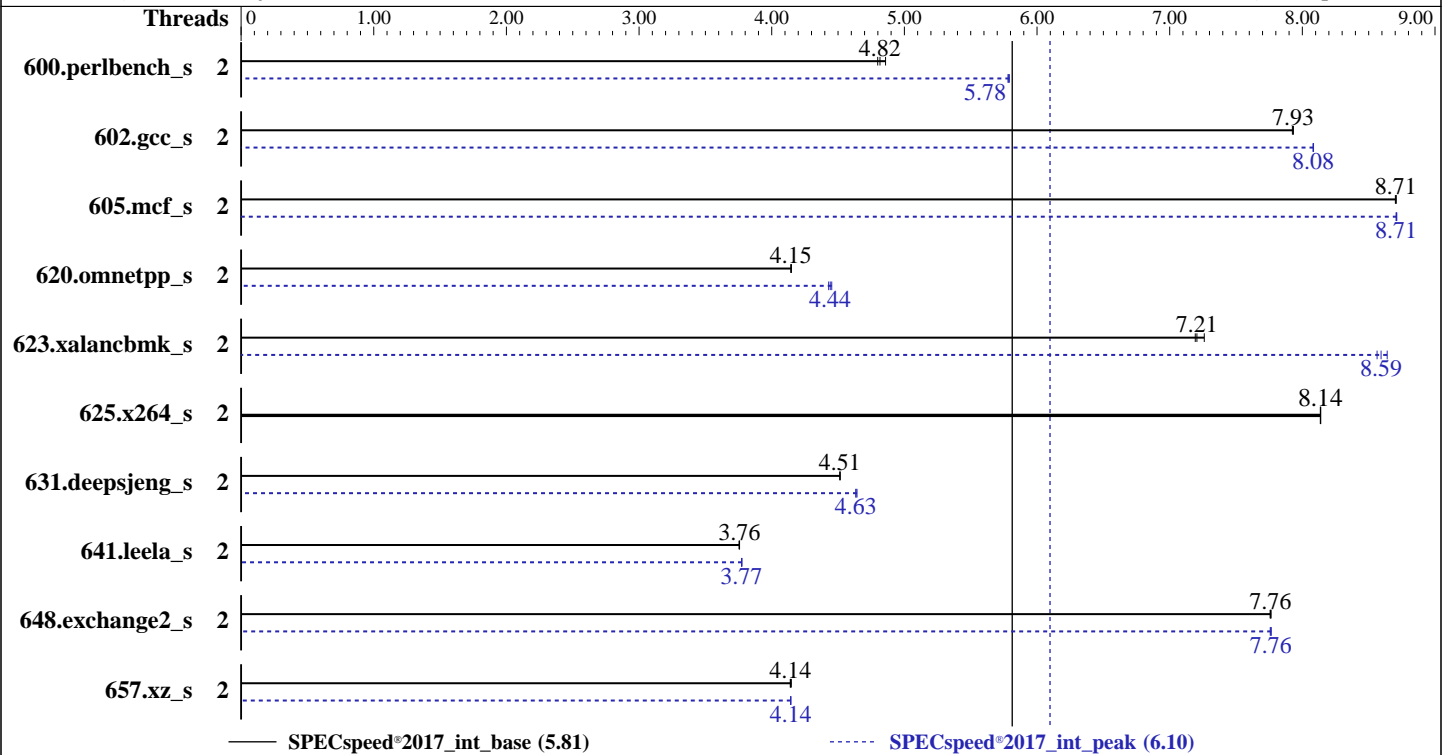

### Hardware

CPU Name: Intel Celeron G4930  
 Max MHz: 3200  
 Nominal: 3200  
 Enabled: 2 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 2 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400)  
 Storage: 1 x SATA M.2 SSD, 480 GB  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)  
 3.10.0-957.el7.x86\_64  
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Fujitsu BIOS Version V5.0.0.13 R1.12.0 for D3673-A1x. Released Sep-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Celeron G4930,  
3.20 GHz

SPECspeed®2017\_int\_base = 5.81

SPECspeed®2017\_int\_peak = 6.10

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Dec-2019  
Hardware Availability: Oct-2019  
Software Availability: Sep-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	2	<b>369</b>	<b>4.82</b>	370	4.80	365	4.86	2	306	5.79	<b>307</b>	<b>5.78</b>	307	5.78
602.gcc_s	2	<b>502</b>	<b>7.93</b>	502	7.93	502	7.92	2	493	8.08	<b>493</b>	<b>8.08</b>	493	8.08
605.mcf_s	2	543	8.70	542	8.71	<b>542</b>	<b>8.71</b>	2	542	8.71	542	8.71	<b>542</b>	<b>8.71</b>
620.omnetpp_s	2	393	4.15	<b>393</b>	<b>4.15</b>	393	4.15	2	366	4.45	368	4.43	<b>367</b>	<b>4.44</b>
623.xalancbmk_s	2	197	7.19	195	7.26	<b>197</b>	<b>7.21</b>	2	<b>165</b>	<b>8.59</b>	164	8.64	165	8.56
625.x264_s	2	217	8.14	217	8.14	<b>217</b>	<b>8.14</b>	2	217	8.14	217	8.14	<b>217</b>	<b>8.14</b>
631.deepsjeng_s	2	317	4.52	317	4.51	<b>317</b>	<b>4.51</b>	2	<b>309</b>	<b>4.63</b>	309	4.64	309	4.63
641.leela_s	2	<b>454</b>	<b>3.76</b>	455	3.75	454	3.76	2	452	3.77	<b>452</b>	<b>3.77</b>	452	3.78
648.exchange2_s	2	379	7.76	<b>379</b>	<b>7.76</b>	379	7.76	2	<b>379</b>	<b>7.76</b>	379	7.76	379	7.77
657.xz_s	2	1493	4.14	<b>1493</b>	<b>4.14</b>	1490	4.15	2	<b>1492</b>	<b>4.14</b>	1492	4.14	1492	4.14

SPECspeed®2017\_int\_base = **5.81**

SPECspeed®2017\_int\_peak = **6.10**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Kernel Boot Parameter set with: nohz\_full=1-15

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH =  
"/home/Benchmark/speccpu2017-1.1.0/lib/ia32:/home/Benchmark/speccpu2017-1.1.0/lib/intel64:/home/Benchmark/speccpu2017-1.1.0/je5.0.1-32:/home/Benchmark/speccpu2017-1.1.0/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

## General Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-1.1.0/lib/intel64"  
OMP\_STACKSIZE = "192M"  
Binaries compiled on a system with 1x Intel Xeon E-2288G CPU + 64 GB RAM  
memory using Redhat Enterprise Linux 7.6  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Celeron G4930,  
3.20 GHz

SPECspeed®2017\_int\_base = 5.81

SPECspeed®2017\_int\_peak = 6.10

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Dec-2019

**Hardware Availability:** Oct-2019

**Software Availability:** Sep-2019

## General Notes (Continued)

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5

jemalloc: sources available via jemalloc.net

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Adjacent Cache Line Prefetch = Disabled

C-State Pre-Wake = Disabled

DCU Streamer Prefetcher = Disabled

DDR PowerDown and idle counter = PCODE

Energy Efficient Turbo = Disabled

Enhanced C-states = Disabled

Intel Virtualization Technology = Disabled

Native ASPM = Disabled

Package C-State un-demotion = Enabled

REFRESH\_2X\_MODE = 1-Enabled for WARM or HOT

Sysinfo program /home/Benchmark/speccpu2017-1.1.0/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Mon Dec 16 09:19:44 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Celeron(R) G4930 CPU @ 3.20GHz

1 "physical id"s (chips)

2 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 2

siblings : 2

physical 0: cores 0 1

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Celeron G4930,  
3.20 GHz

SPECspeed®2017\_int\_base = 5.81

SPECspeed®2017\_int\_peak = 6.10

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

```

CPU(s):                2
On-line CPU(s) list:   0,1
Thread(s) per core:    1
Core(s) per socket:    2
Socket(s):              1
NUMA node(s):          1
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  158
Model name:             Intel(R) Celeron(R) G4930 CPU @ 3.20GHz
Stepping:               11
CPU MHz:                3200.000
CPU max MHz:            3200.0000
CPU min MHz:            800.0000
BogoMIPS:               6384.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               256K
L3 cache:               2048K
NUMA node0 CPU(s):     0,1
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16
xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand
lahf_lm abm 3dnowprefetch epb intel_pt ssbd ibrs ibpb stibp tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap
clflushopt xsaveopt xsavec xgetbv1 dtherm arat pln pts hwp hwp_notify hwp_act_window
hwp_epp spec_ctrl intel_stibp flush_lld

```

```

/proc/cpuinfo cache data
cache size : 2048 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

From /proc/meminfo
MemTotal:        65726088 kB
HugePages_Total: 0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.6 (Maipo)"
ID="rhel"

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Celeron G4930,  
3.20 GHz

SPECspeed®2017\_int\_base = 5.81

SPECspeed®2017\_int\_peak = 6.10

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Sep-2019

### Platform Notes (Continued)

```
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.6"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Mitigation: PTE Inversion
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: Load fences, __user pointer
sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: IBRS (kernel)
```

```
run-level 3 Dec 16 09:18
```

```
SPEC is set to: /home/Benchmark/speccpu2017-1.1.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   392G   44G  349G  12% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS: FUJITSU // American Megatrends Inc. V5.0.0.13 R1.12.0 for D3673-A1x
09/06/2019
Vendor: FUJITSU
Product: PRIMERGY TX1320 M4
Serial: YMJKXXXXXX
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667, configured at 2400

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Celeron G4930,  
3.20 GHz

SPECspeed®2017\_int\_base = 5.81

SPECspeed®2017\_int\_peak = 6.10

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Sep-2019

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base,  
| peak) 625.x264\_s(base, peak) 657.xz\_s(base, peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 623.xalancbmk\_s(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 623.xalancbmk\_s(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX1330 M4, Intel Celeron G4930,  
3.20 GHz

SPECspeed®2017\_int\_base = 5.81

SPECspeed®2017\_int\_peak = 6.10

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2019  
**Hardware Availability:** Oct-2019  
**Software Availability:** Sep-2019

## Compiler Version Notes (Continued)

64, Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:  
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:  
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:  
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Celeron G4930,  
3.20 GHz

SPECspeed®2017\_int\_base = 5.81

SPECspeed®2017\_int\_peak = 6.10

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2019

Hardware Availability: Oct-2019

Software Availability: Sep-2019

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
623.xalancbmk_s: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.0.117/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64  
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
625.x264_s: -DSPEC_LP64  
631.deepsjeng_s: -DSPEC_LP64  
641.leela_s: -DSPEC_LP64  
648.exchange2_s: -DSPEC_LP64  
657.xz_s: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2  
-xSSE4.2 -qopt-mem-layout-trans=3 -ipo -O3 -no-prec-div  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Celeron G4930,  
3.20 GHz

SPECspeed®2017\_int\_base = 5.81

SPECspeed®2017\_int\_peak = 6.10

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Dec-2019

**Hardware Availability:** Oct-2019

**Software Availability:** Sep-2019

## Peak Optimization Flags (Continued)

```
602.gcc_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xSSE4.2 -qopt-mem-layout-trans=3 -ipo -O3 -no-prec-div
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

625.x264\_s: basepeak = yes

657.xz\_s: Same as 602.gcc\_s

C++ benchmarks:

```
620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
623.xalancbmk_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xSSE4.2 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

631.deepsjeng\_s: Same as 620.omnetpp\_s

641.leela\_s: Same as 620.omnetpp\_s

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.xml>



# SPEC CPU<sup>®</sup>2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Celeron G4930,  
3.20 GHz

SPECspeed<sup>®</sup>2017\_int\_base = 5.81

SPECspeed<sup>®</sup>2017\_int\_peak = 6.10

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Dec-2019

**Hardware Availability:** Oct-2019

**Software Availability:** Sep-2019

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU<sup>®</sup>2017 v1.1.0 on 2019-12-15 19:19:43-0500.  
Report generated on 2020-02-04 17:56:33 by CPU2017 PDF formatter v6255.  
Originally published on 2020-02-04.