



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

**SPECSspeed®2017\_fp\_base = 89.5**

**SPECSspeed®2017\_fp\_peak = 91.8**

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**Test Date:** Jan-2020

**Hardware Availability:** Apr-2020

**Software Availability:** Aug-2019

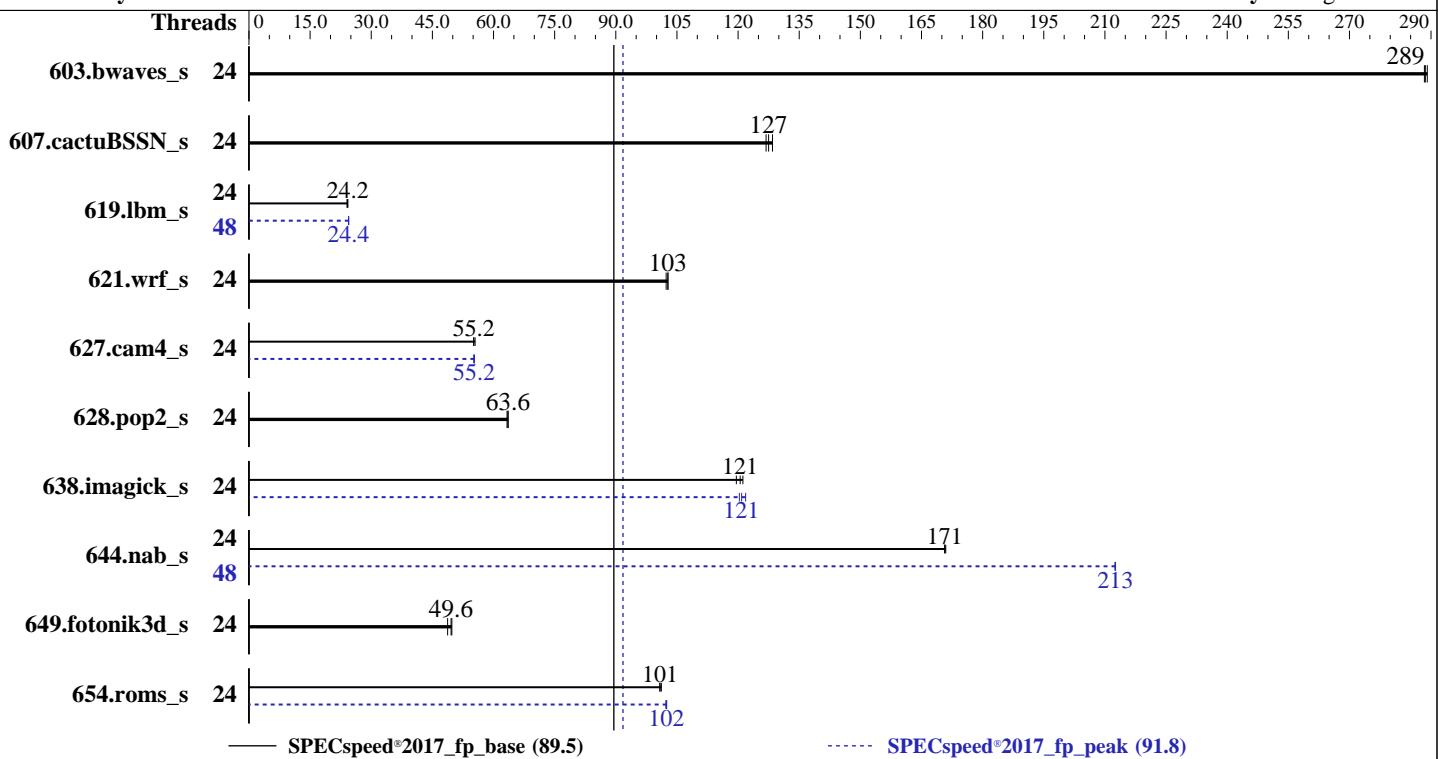

## Hardware

CPU Name: AMD EPYC 7F72  
 Max MHz: 3700  
 Nominal: 3200  
 Enabled: 24 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 192 MB I+D on chip per chip, 16 MB shared / 2 cores  
 Other: None  
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP1  
 Compiler: kernel 4.12.14-195-default  
 Parallel: C/C++/Fortran: Version 2.0.0 of AOCC  
 Firmware: Yes  
 File System: Version 1.3.0 released Jan-2020  
 System State: xfs  
 Base Pointers: Run level 3 (multi-user)  
 Peak Pointers: 64-bit  
 Other: 64-bit  
 Power Management: jemalloc: jemalloc memory allocator library v5.1.0  
 BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	205	288	<b>204</b>	<b>289</b>	204	289	24	205	288	<b>204</b>	<b>289</b>	204	289
607.cactuBSSN_s	24	<b>131</b>	<b>127</b>	130	128	131	127	24	<b>131</b>	<b>127</b>	130	128	131	127
619.lbm_s	24	<b>216</b>	<b>24.2</b>	218	24.0	216	24.2	48	<b>215</b>	24.4	214	24.5	<b>214</b>	<b>24.4</b>
621.wrf_s	24	129	102	<b>129</b>	<b>103</b>	129	103	24	129	102	<b>129</b>	<b>103</b>	129	103
627.cam4_s	24	<b>161</b>	<b>55.2</b>	161	55.1	160	55.5	24	160	55.3	161	55.2	<b>161</b>	<b>55.2</b>
628.pop2_s	24	<b>187</b>	<b>63.6</b>	188	63.3	187	63.6	24	<b>187</b>	<b>63.6</b>	188	63.3	187	63.6
638.imagick_s	24	<b>120</b>	<b>121</b>	121	120	119	121	24	118	122	120	120	<b>119</b>	<b>121</b>
644.nab_s	24	102	171	<b>102</b>	<b>171</b>	102	171	48	82.2	212	82.2	213	<b>82.2</b>	<b>213</b>
649.fotonik3d_s	24	<b>184</b>	<b>49.6</b>	187	48.7	183	49.8	24	<b>184</b>	<b>49.6</b>	187	48.7	183	49.8
654.roms_s	24	<b>156</b>	<b>101</b>	156	101	156	101	24	<b>154</b>	<b>102</b>	154	102	154	102
SPECSpeed®2017_fp_base =				89.5				SPECSpeed®2017_fp_peak =				91.8		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
 Set swappiness=1 to swap only if necessary  
 Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-47"  
LD_LIBRARY_PATH =  
    "/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0  
    /amd_speed_aocc200_rome_C_lib/32:"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "48"
```

Environment variables set by runcpu during the 619.lbm\_s peak run:

```
GOMP_CPU_AFFINITY = "0 24 1 25 2 26 3 27 4 28 5 29 6 30 7 31 8 32 9 33 10 34  
11 35 12 36 13 37 14 38 15 39 16 40 17 41 18 42 19 43 20 44 21 45 22 46  
23 47"
```

Environment variables set by runcpu during the 627.cam4\_s peak run:

```
GOMP_CPU_AFFINITY = "0-23"
```

Environment variables set by runcpu during the 638.imagick\_s peak run:

```
GOMP_CPU_AFFINITY = "0-23"
```

Environment variables set by runcpu during the 644.nab\_s peak run:

```
GOMP_CPU_AFFINITY = "0 24 1 25 2 26 3 27 4 28 5 29 6 30 7 31 8 32 9 33 10 34  
11 35 12 36 13 37 14 38 15 39 16 40 17 41 18 42 19 43 20 44 21 45 22 46  
23 47"
```

Environment variables set by runcpu during the 654.roms\_s peak run:

```
GOMP_CPU_AFFINITY = "0-23"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -fno-omit-frame-pointer  
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 2  
CCX as NUMA Domain set to Enabled  
System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost Enabled  
Cstates set to Enabled  
Memory Patrol Scrub Disabled  
Memory Refresh Rate set to 1x  
PCI ASPM L1 Link Power Management Disabled  
Determinism Slider set to Power Determinism  
Efficiency Optimized Mode Disabled  
Memory Interleaving set to Disabled  
Memory Freq set to 3200  
Fan Speed = Maximum

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on linux-g3ob Thu Jan 30 09:24:51 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7F72 24-Core Processor
  1 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings   : 48
  physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             1
NUMA node(s):          12
Vendor ID:             AuthenticAMD
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

CPU family: 23  
Model: 49  
Model name: AMD EPYC 7F72 24-Core Processor  
Stepping: 0  
CPU MHz: 3194.196  
BogoMIPS: 6388.39  
Virtualization: AMD-V  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 512K  
L3 cache: 16384K  
NUMA node0 CPU(s): 0,1,24,25  
NUMA node1 CPU(s): 2,3,26,27  
NUMA node2 CPU(s): 4,5,28,29  
NUMA node3 CPU(s): 6,7,30,31  
NUMA node4 CPU(s): 8,9,32,33  
NUMA node5 CPU(s): 10,11,34,35  
NUMA node6 CPU(s): 12,13,36,37  
NUMA node7 CPU(s): 14,15,38,39  
NUMA node8 CPU(s): 16,17,40,41  
NUMA node9 CPU(s): 18,19,42,43  
NUMA node10 CPU(s): 20,21,44,45  
NUMA node11 CPU(s): 22,23,46,47  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl xtopology nonstop\_tsc cpuid extd\_apicid aperfmpfperf pnpi pclmulqdq monitor ssse3 fma cx16 sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrandlahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_l2 mwaitx cpb cat\_13 cdp\_13 hw\_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqmq rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xsavec xgetbv1 xsaves cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local clzero irperf xsaveerptr arat npt lbrv svm\_lock nrrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold avic v\_vmsave\_vmload vgif umip rdpid overflow\_recov succor smca

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 12 nodes (0-11)  
node 0 cpus: 0 1 24 25  
node 0 size: 20924 MB  
node 0 free: 20866 MB  
node 1 cpus: 2 3 26 27  
node 1 size: 21502 MB

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
node 1 free: 21467 MB
node 2 cpus: 4 5 28 29
node 2 size: 21503 MB
node 2 free: 21470 MB
node 3 cpus: 6 7 30 31
node 3 size: 21502 MB
node 3 free: 21460 MB
node 4 cpus: 8 9 32 33
node 4 size: 21502 MB
node 4 free: 21437 MB
node 5 cpus: 10 11 34 35
node 5 size: 21504 MB
node 5 free: 21469 MB
node 6 cpus: 12 13 36 37
node 6 size: 21502 MB
node 6 free: 21413 MB
node 7 cpus: 14 15 38 39
node 7 size: 21502 MB
node 7 free: 21442 MB
node 8 cpus: 16 17 40 41
node 8 size: 21474 MB
node 8 free: 21396 MB
node 9 cpus: 18 19 42 43
node 9 size: 21502 MB
node 9 free: 21357 MB
node 10 cpus: 20 21 44 45
node 10 size: 21502 MB
node 10 free: 21420 MB
node 11 cpus: 22 23 46 47
node 11 size: 21490 MB
node 11 free: 21370 MB
node distances:
node  0   1   2   3   4   5   6   7   8   9   10  11
  0: 10  11  11  11  11  11  12  12  12  12  12  12
  1: 11  10  11  11  11  11  12  12  12  12  12  12
  2: 11  11  10  11  11  11  12  12  12  12  12  12
  3: 11  11  11  10  11  11  12  12  12  12  12  12
  4: 11  11  11  11  10  11  12  12  12  12  12  12
  5: 11  11  11  11  11  10  12  12  12  12  12  12
  6: 12  12  12  12  12  12  10  11  11  11  11  11
  7: 12  12  12  12  12  12  11  10  11  11  11  11
  8: 12  12  12  12  12  12  11  11  10  11  11  11
  9: 12  12  12  12  12  12  11  11  11  10  11  11
 10: 12  12  12  12  12  12  11  11  11  11  10  11
 11: 12  12  12  12  12  12  11  11  11  11  11  10
```

From /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
MemTotal: 263591340 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP1"
  VERSION_ID="15.1"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

```
uname -a:
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

```
run-level 3 Jan 29 08:25 last=5
```

```
SPEC is set to: /root/cpu2017-1.1.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   440G   37G  404G   9%  /
```

```
From /sys/devices/virtual/dmi/id
BIOS: Dell Inc. 1.3.0 01/14/2020
Vendor: Dell Inc.
Product: PowerEdge R7515
Product Family: PowerEdge
Serial: 5MGPH13
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x 80AD80B380AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200

8x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
           | 644.nab_s(base, peak)
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

```
=====
C++, C, Fortran | 607.cactubssn_s(base, peak)
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

```
Target: x86_64-unknown-linux-gnu
```

```
Thread model: posix
```

```
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

```
=====
Fortran      | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
           | 654.roms_s(base, peak)
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactusBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Base Portability Flags (Continued)

638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Fortran benchmarks:

```
-futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -futto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch  
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only  
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec  
-lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5 -mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp -lmvec -lamdlibm
-fopenmp=libomp -lomp -lpthread -ldl -ljemalloc -lflang
```

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

```
654.roms_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver2
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 89.5

PowerEdge R7515 (AMD EPYC 7F72, 3.20 GHz)

SPECSpeed®2017\_fp\_peak = 91.8

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

627.cam4\_s (continued):

```
-mllvm -vector-library=LIBMVEC  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000  
-fvl-function-specialization -O3 -funroll-loops  
-Mrecursive -Kieee -fno-finite-math-only -DSPEC_OPENMP  
-fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec  
-lamdlibm -ljemalloc -lflang
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactusBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Benchmarks using both Fortran and C:

-Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-01-30 10:24:50-0500.

Report generated on 2020-04-14 15:19:55 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.