



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSspeed®2017\_fp\_base = 121

SPECSspeed®2017\_fp\_peak = 127

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

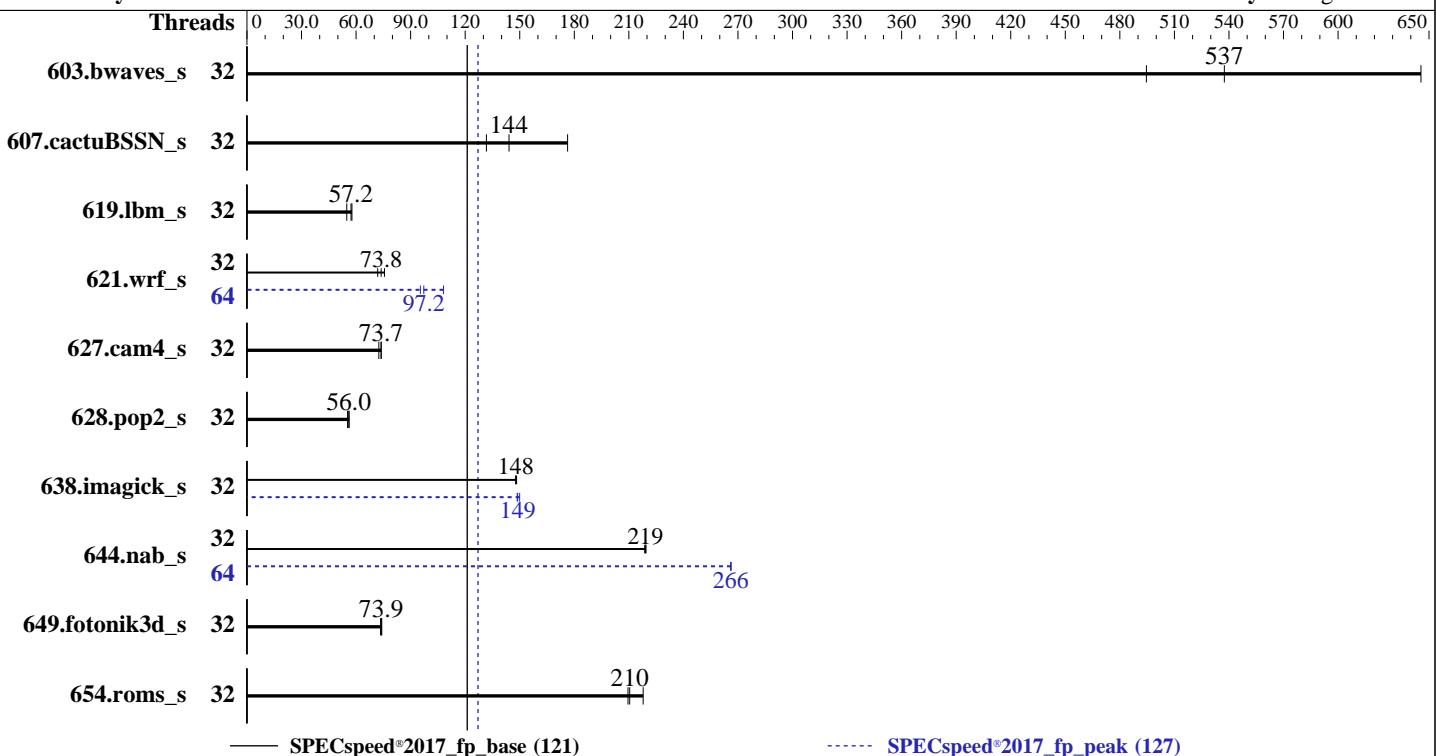

## Hardware

CPU Name: AMD EPYC 7F52  
 Max MHz: 3900  
 Nominal: 3500  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 16 MB per core  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP1  
 Compiler: kernel 4.12.14-197.7-default  
 Parallel: C/C++/Fortran: Version 2.0.0 of AOCC  
 Firmware: Yes  
 File System: Version 1.2.4 released Dec-2019  
 System State: xfs  
 Base Pointers: Run level 3 (multi-user)  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.2.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_base = 121

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	32	91.4	646	<b><u>110</u></b>	<b><u>537</u></b>	119	495	32	91.4	646	<b><u>110</u></b>	<b><u>537</u></b>	119	495
607.cactuBSSN_s	32	94.5	176	<b><u>116</u></b>	<b><u>144</u></b>	127	132	32	94.5	176	<b><u>116</u></b>	<b><u>144</u></b>	127	132
619.lbm_s	32	<b><u>91.5</u></b>	<b><u>57.2</u></b>	90.7	57.7	95.4	54.9	32	<b><u>91.5</u></b>	<b><u>57.2</u></b>	90.7	57.7	<b><u>95.4</u></b>	54.9
621.wrf_s	32	175	75.6	<b><u>179</u></b>	<b><u>73.8</u></b>	184	71.9	64	<b><u>136</u></b>	<b><u>97.2</u></b>	139	95.4	122	108
627.cam4_s	32	120	73.8	<b><u>120</u></b>	<b><u>73.7</u></b>	122	72.5	32	120	73.8	<b><u>120</u></b>	<b><u>73.7</u></b>	122	72.5
628.pop2_s	32	<b><u>212</u></b>	<b><u>56.0</u></b>	211	56.2	215	55.3	32	<b><u>212</u></b>	<b><u>56.0</u></b>	211	56.2	<b><u>215</u></b>	55.3
638.imagick_s	32	97.3	148	<b><u>97.5</u></b>	<b><u>148</u></b>	97.6	148	32	<b><u>96.9</u></b>	<b><u>149</u></b>	96.2	150	97.1	149
644.nab_s	32	79.6	219	<b><u>79.7</u></b>	<b><u>219</u></b>	79.9	219	64	<b><u>65.7</u></b>	<b><u>266</u></b>	65.6	266	<b><u>65.7</u></b>	<b><u>266</u></b>
649.fotonik3d_s	32	124	73.5	123	74.1	<b><u>123</u></b>	<b><u>73.9</u></b>	32	124	73.5	123	74.1	<b><u>123</u></b>	<b><u>73.9</u></b>
654.roms_s	32	72.3	218	<b><u>74.8</u></b>	<b><u>210</u></b>	75.1	210	32	72.3	218	<b><u>74.8</u></b>	<b><u>210</u></b>	75.1	210

SPECSpeed®2017\_fp\_base = 121

SPECSpeed®2017\_fp\_peak = 127

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
 Set swappiness=1 to swap only if necessary  
 Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 121

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-63"  
LD_LIBRARY_PATH =  
    "/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0  
    /amd_speed_aocc200_rome_C_lib/32:"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "64"
```

Environment variables set by runcpu during the 621.wrf\_s peak run:

```
GOMP_CPU_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42  
    11 43 12 44 13 45 14 46 15 47 16 48 17 49 18 50 19 51 20 52 21 53 22 54  
    23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"
```

Environment variables set by runcpu during the 638.imagick\_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 644.nab\_s peak run:

```
GOMP_CPU_AFFINITY = "0 32 1 33 2 34 3 35 4 36 5 37 6 38 7 39 8 40 9 41 10 42  
    11 43 12 44 13 45 14 46 15 47 16 48 17 49 18 50 19 51 20 52 21 53 22 54  
    23 55 24 56 25 57 26 58 27 59 28 60 29 61 30 62 31 63"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -fllto  
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS settings:

NUMA Nodes Per Socket set to 4

CCX as NUMA Domain set to Enabled

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 121

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost Enabled  
Cstates set to Enabled  
Memory Patrol Scrub Disabled  
Memory Refresh Rate set to 1x  
PCI ASPM L1 Link Power Management Disabled  
Determinism Slider set to Power Determinism  
Efficiency Optimized Mode Disabled  
Memory Interleaving set to Disabled

```
Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on suse15-spl Thu Jan  2 05:21:58 2098
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : AMD EPYC 7F52 16-Core Processor
  2 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings   : 32
  physical 0: cores 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
  physical 1: cores 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         43 bits physical, 48 bits virtual
CPU(s):                64
On-line CPU(s) list:  0-63
Thread(s) per core:   2
Core(s) per socket:   16
Socket(s):             2
NUMA node(s):          32
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 49
Model name:            AMD EPYC 7F52 16-Core Processor
Stepping:               0
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 121

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

CPU MHz: 3493.517  
BogoMIPS: 6987.03  
Virtualization: AMD-V  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 512K  
L3 cache: 16384K  
NUMA node0 CPU(s): 0,32  
NUMA node1 CPU(s): 1,33  
NUMA node2 CPU(s): 2,34  
NUMA node3 CPU(s): 3,35  
NUMA node4 CPU(s): 4,36  
NUMA node5 CPU(s): 5,37  
NUMA node6 CPU(s): 6,38  
NUMA node7 CPU(s): 7,39  
NUMA node8 CPU(s): 8,40  
NUMA node9 CPU(s): 9,41  
NUMA node10 CPU(s): 10,42  
NUMA node11 CPU(s): 11,43  
NUMA node12 CPU(s): 12,44  
NUMA node13 CPU(s): 13,45  
NUMA node14 CPU(s): 14,46  
NUMA node15 CPU(s): 15,47  
NUMA node16 CPU(s): 16,48  
NUMA node17 CPU(s): 17,49  
NUMA node18 CPU(s): 18,50  
NUMA node19 CPU(s): 19,51  
NUMA node20 CPU(s): 20,52  
NUMA node21 CPU(s): 21,53  
NUMA node22 CPU(s): 22,54  
NUMA node23 CPU(s): 23,55  
NUMA node24 CPU(s): 24,56  
NUMA node25 CPU(s): 25,57  
NUMA node26 CPU(s): 26,58  
NUMA node27 CPU(s): 27,59  
NUMA node28 CPU(s): 28,60  
NUMA node29 CPU(s): 29,61  
NUMA node30 CPU(s): 30,62  
NUMA node31 CPU(s): 31,63  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm constant\_tsc rep\_good nopl nonstop\_tsc cpuid extd\_apicid aperfmpf perf\_pni pclmulqdq monitor ssse3 fma cx16 sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c rdrandlahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_l2 mwaitx cpb cat\_13 cdp\_13 hw\_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqmq rdt\_a rdseed adx smap clflushopt clwb sha\_ni xsaveopt xgetbv1 xsaves

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_base = 121

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Platform Notes (Continued)

```
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt  
lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter  
pfthreshold avic v_vmsave_vmlload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data  
cache size : 512 KB
```

```
From numactl --hardware  WARNING: a numactl 'node' might or might not correspond to a  
physical chip.
```

```
available: 32 nodes (0-31)  
node 0 cpus: 0 32  
node 0 size: 15677 MB  
node 0 free: 15613 MB  
node 1 cpus: 1 33  
node 1 size: 16127 MB  
node 1 free: 16046 MB  
node 2 cpus: 2 34  
node 2 size: 16127 MB  
node 2 free: 16081 MB  
node 3 cpus: 3 35  
node 3 size: 16126 MB  
node 3 free: 16061 MB  
node 4 cpus: 4 36  
node 4 size: 16127 MB  
node 4 free: 16107 MB  
node 5 cpus: 5 37  
node 5 size: 16127 MB  
node 5 free: 16109 MB  
node 6 cpus: 6 38  
node 6 size: 16127 MB  
node 6 free: 16112 MB  
node 7 cpus: 7 39  
node 7 size: 16126 MB  
node 7 free: 16085 MB  
node 8 cpus: 8 40  
node 8 size: 16127 MB  
node 8 free: 16109 MB  
node 9 cpus: 9 41  
node 9 size: 16127 MB  
node 9 free: 16113 MB  
node 10 cpus: 10 42  
node 10 size: 16127 MB  
node 10 free: 16106 MB  
node 11 cpus: 11 43  
node 11 size: 16126 MB  
node 11 free: 16112 MB  
node 12 cpus: 12 44
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 121

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
node 12 size: 16127 MB
node 12 free: 16107 MB
node 13 cpus: 13 45
node 13 size: 16127 MB
node 13 free: 16093 MB
node 14 cpus: 14 46
node 14 size: 16127 MB
node 14 free: 16043 MB
node 15 cpus: 15 47
node 15 size: 16114 MB
node 15 free: 16083 MB
node 16 cpus: 16 48
node 16 size: 16127 MB
node 16 free: 16111 MB
node 17 cpus: 17 49
node 17 size: 16127 MB
node 17 free: 16112 MB
node 18 cpus: 18 50
node 18 size: 16127 MB
node 18 free: 16113 MB
node 19 cpus: 19 51
node 19 size: 16126 MB
node 19 free: 16111 MB
node 20 cpus: 20 52
node 20 size: 16127 MB
node 20 free: 16105 MB
node 21 cpus: 21 53
node 21 size: 16127 MB
node 21 free: 16110 MB
node 22 cpus: 22 54
node 22 size: 16127 MB
node 22 free: 16111 MB
node 23 cpus: 23 55
node 23 size: 16126 MB
node 23 free: 16111 MB
node 24 cpus: 24 56
node 24 size: 16127 MB
node 24 free: 16109 MB
node 25 cpus: 25 57
node 25 size: 16127 MB
node 25 free: 16109 MB
node 26 cpus: 26 58
node 26 size: 16127 MB
node 26 free: 16108 MB
node 27 cpus: 27 59
node 27 size: 16126 MB
node 27 free: 16107 MB
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 121

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

```
node 28 cpus: 28 60
node 28 size: 16127 MB
node 28 free: 16112 MB
node 29 cpus: 29 61
node 29 size: 16098 MB
node 29 free: 16075 MB
node 30 cpus: 30 62
node 30 size: 16127 MB
node 30 free: 16111 MB
node 31 cpus: 31 63
node 31 size: 16125 MB
node 31 free: 16107 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
20 21 22 23 24 25 26 27 28 29 30 31
 0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 12 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 12 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12 12 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 4: 12 12 12 12 10 11 11 11 11 12 12 12 12 12 12 12 12 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 5: 12 12 12 12 12 11 10 11 11 11 12 12 12 12 12 12 12 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 6: 12 12 12 12 12 11 11 10 11 11 12 12 12 12 12 12 12 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 7: 12 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 8: 12 12 12 12 12 12 12 12 12 12 10 11 11 11 11 11 12 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
 9: 12 12 12 12 12 12 12 12 12 12 11 10 11 11 11 11 12 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
10: 12 12 12 12 12 12 12 12 12 12 11 11 10 11 11 11 12 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
11: 12 12 12 12 12 12 12 12 12 12 11 11 11 11 11 11 10 12 32 32
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
12: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 10 11 11
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
13: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 10
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
14: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
15: 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 12 11 11 10
 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

**SPECSpeed®2017\_fp\_base = 121**

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

**SPECSpeed®2017\_fp\_peak = 127**

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

16:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	10	11	11	11	
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	10	11	11	
17:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	11	10	11	11
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	10	11	11	
18:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	11	11	10	11
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	11	11	10	11	
19:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	11	11	11	10
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
20:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
21:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
22:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
23:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
24:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	10	11	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
25:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	11	10	11	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
26:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	11	11	10	11	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
27:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	11	11	11	10	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
28:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
29:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
30:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
31:	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	32	12	12	12	12
12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	

From /proc/meminfo

```
MemTotal:      527952040 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 121

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

CPE\_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:

```
Linux suse15-sp1 4.12.14-197.7-default #1 SMP Mon Jun 24 08:33:54 UTC 2019 (650fd32)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrampoline, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling

run-level 3 Nov 26 14:00

SPEC is set to: /root/cpu2017-1.1.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	444G	13G	432G	3%	/

From /sys/devices/virtual/dmi/id  
BIOS: Dell Inc. 1.2.4 12/03/2019  
Vendor: Dell Inc.  
Product: PowerEdge C6525  
Product Family: PowerEdge

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
16x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
           | 644.nab_s(base, peak)
-----
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_base = 121

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

C++, C, Fortran | 607.cactusBSSN\_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

=====

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 121

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-fno -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_base = 121

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp  
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc  
-lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver2  
-funroll-loops -Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp  
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -funroll-loops -Mrecursive -z muldefs  
-Kieee -fno-finite-math-only -DSPEC_OPENMP -fopenmp -fopenmp=libomp  
-lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2  
-fstruct-layout=3 -mllvm -unroll-threshold=50 -fremap-arrays  
-mllvm -function-specialize -mllvm -enable-gvn-hoist  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp  
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -unroll-threshold=100 -mllvm -enable-partial-unswitch  
-funroll-loops -Mrecursive -z muldefs -Kieee -fno-finite-math-only  
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec  
-lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_base = 121

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Base Other Flags

C benchmarks:

-Wno-return-type -DUSE\_OPENMP

Fortran benchmarks:

-DUSE\_OPENMP -Wno-return-type

Benchmarks using both Fortran and C:

-DUSE\_OPENMP -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type -DUSE\_OPENMP

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: -fllto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 121

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Date: Jan-2020

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

638.imagick\_s (continued):

```
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-lmvec -lamdlibm -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lflang
```

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -O3 -funroll-loops
-Mrecursive -Kieee -fno-finite-math-only -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lpthread -ldl -lmvec
-lamdlibm -ljemalloc -lflang
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6525 (AMD EPYC 7F52, 3.50 GHz)

SPECSpeed®2017\_fp\_base = 121

SPECSpeed®2017\_fp\_peak = 127

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jan-2020

Hardware Availability: Apr-2020

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -DUSE\_OPENMP

Fortran benchmarks:

-DUSE\_OPENMP -Wno-return-type

Benchmarks using both Fortran and C:

-DUSE\_OPENMP -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-return-type -DUSE\_OPENMP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2098-01-02 06:21:58-0500.

Report generated on 2020-04-14 14:10:22 by CPU2017 PDF formatter v6255.

Originally published on 2020-04-14.