



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST50  
(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_fp\_base = 31.8

SPECspeed®2017\_fp\_peak = 32.1

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Mar-2020

Software Availability: Apr-2020

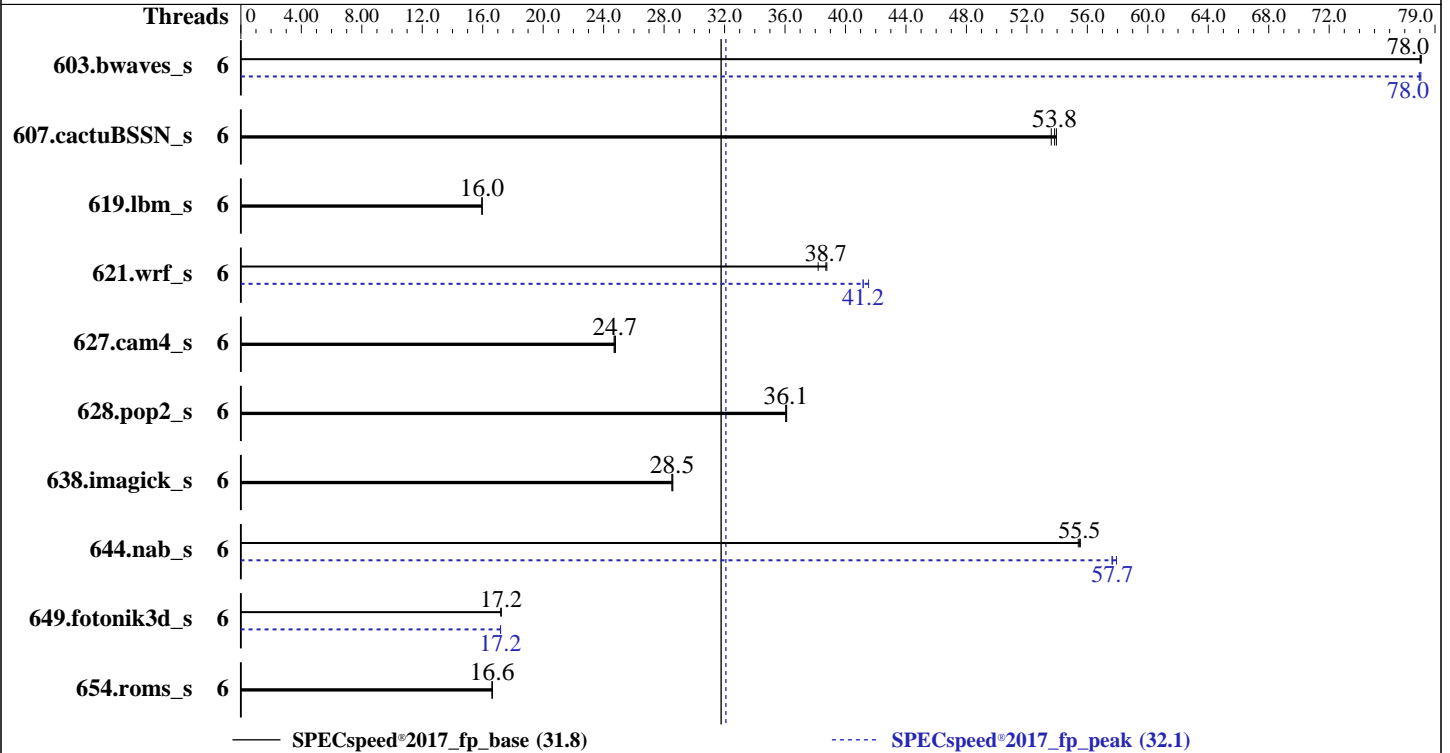

### Hardware

CPU Name: Intel Xeon E-2226G  
 Max MHz: 4700  
 Nominal: 3400  
 Enabled: 6 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.1 (Ootpa)  
 Kernel 4.18.0-147.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version ITE109B released Apr-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST50  
(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_fp\_base = 31.8

SPECspeed®2017\_fp\_peak = 32.1

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Mar-2020  
**Software Availability:** Apr-2020

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	6	756	78.0	755	78.1	<b>756</b>	<b>78.0</b>	6	756	78.1	<b>756</b>	<b>78.0</b>	757	78.0
607.cactuBSSN_s	6	311	53.6	309	54.0	<b>310</b>	<b>53.8</b>	6	311	53.6	309	54.0	<b>310</b>	<b>53.8</b>
619.lbm_s	6	328	16.0	328	16.0	<b>328</b>	<b>16.0</b>	6	328	16.0	328	16.0	<b>328</b>	<b>16.0</b>
621.wrf_s	6	346	38.2	<b>342</b>	<b>38.7</b>	341	38.8	6	318	41.5	<b>321</b>	<b>41.2</b>	321	41.2
627.cam4_s	6	359	24.7	358	24.8	<b>358</b>	<b>24.7</b>	6	359	24.7	358	24.8	<b>358</b>	<b>24.7</b>
628.pop2_s	6	329	36.1	<b>329</b>	<b>36.1</b>	329	36.1	6	329	36.1	<b>329</b>	<b>36.1</b>	329	36.1
638.imagick_s	6	506	28.5	<b>506</b>	<b>28.5</b>	505	28.6	6	506	28.5	<b>506</b>	<b>28.5</b>	505	28.6
644.nab_s	6	315	55.4	<b>315</b>	<b>55.5</b>	315	55.5	6	303	57.6	<b>303</b>	<b>57.7</b>	302	57.9
649.fotonik3d_s	6	<b>530</b>	<b>17.2</b>	530	17.2	530	17.2	6	<b>531</b>	<b>17.2</b>	531	17.2	531	17.2
654.roms_s	6	948	16.6	<b>947</b>	<b>16.6</b>	946	16.6	6	948	16.6	<b>947</b>	<b>16.6</b>	946	16.6

SPECspeed®2017\_fp\_base = **31.8**

SPECspeed®2017\_fp\_peak = **32.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH =  
"/home/cpu2017-1.1.0-ic19.1.1/lib/intel64:/home/cpu2017-1.1.0-ic19.1.1/j  
e5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 31.8

ThinkSystem ST50  
(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_fp\_peak = 32.1

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Mar-2020  
**Software Availability:** Apr-2020

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

Sysinfo program /home/cpu2017-1.1.0-ic19.1.1/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Thu Jun 4 13:19:39 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) E-2226G CPU @ 3.40GHz  
1 "physical id"s (chips)  
6 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 6  
siblings : 6  
physical 0: cores 0 1 2 3 4 5

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 6  
On-line CPU(s) list: 0-5  
Thread(s) per core: 1  
Core(s) per socket: 6  
Socket(s): 1  
NUMA node(s): 1  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 158  
Model name: Intel(R) Xeon(R) E-2226G CPU @ 3.40GHz  
Stepping: 10  
CPU MHz: 4508.895

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 31.8

ThinkSystem ST50  
(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_fp\_peak = 32.1

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Mar-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

```

CPU max MHz:      4700.0000
CPU min MHz:      800.0000
BogoMIPS:         6816.00
Virtualization:   VT-x
L1d cache:        32K
L1i cache:        32K
L2 cache:         256K
L3 cache:         12288K
NUMA node0 CPU(s): 0-5
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
pti ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt
xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window
hwp_epp md_clear flush_l1d

```

```

/proc/cpuinfo cache data
cache size : 12288 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 64254 MB
node 0 free: 62817 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal:      65796896 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 31.8

ThinkSystem ST50  
(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_fp\_peak = 32.1

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Mar-2020  
**Software Availability:** Apr-2020

### Platform Notes (Continued)

```
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Mitigation: PTE Inversion; VMX: conditional
cache flushes, SMT disabled
Microarchitectural Data Sampling:      Mitigation: Clear CPU buffers; SMT disabled
CVE-2017-5754 (Meltdown):               Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full generic retpoline, IBPB:
conditional, IBRS_FW, STIBP: disabled, RSB
filling
```

```
run-level 3 Jun 4 09:18
```

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.1.1
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   812G   66G  747G   9% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS:      LENOVO ITE109B 04/24/2020
Vendor:    LENOVO
Product:   INVALID
Product Family: Lenovo Product
Serial:    INVALID
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2666
```

(End of data from sysinfo program)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST50  
(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_fp\_base = 31.8

SPECspeed®2017\_fp\_peak = 32.1

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Mar-2020  
**Software Availability:** Apr-2020

### Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)  
=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 31.8

ThinkSystem ST50  
(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_fp\_peak = 32.1

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020

**Hardware Availability:** Mar-2020

**Software Availability:** Apr-2020

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP

-mbranches-within-32B-boundaries

Fortran benchmarks:

-m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp

-nostandard-realloc-lhs -mbranches-within-32B-boundaries

-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 31.8

ThinkSystem ST50  
(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_fp\_peak = 32.1

**CPU2017 License:** 9017

**Test Date:** Jun-2020

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Mar-2020

**Tested by:** Lenovo Global Technology

**Software Availability:** Apr-2020

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-mbranches-within-32B-boundaries
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST50  
(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_fp\_base = 31.8

SPECspeed®2017\_fp\_peak = 32.1

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020

**Hardware Availability:** Mar-2020

**Software Availability:** Apr-2020

## Peak Optimization Flags (Continued)

644.nab\_s (continued):

```
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX2
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CFL-B.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1u1-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CFL-B.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem ST50  
(3.40 GHz, Intel Xeon E-2226G)

SPECspeed®2017\_fp\_base = 31.8

SPECspeed®2017\_fp\_peak = 32.1

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020

**Hardware Availability:** Mar-2020

**Software Availability:** Apr-2020

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-04 01:19:39-0400.  
Report generated on 2020-06-23 18:16:40 by CPU2017 PDF formatter v6255.  
Originally published on 2020-06-23.