



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3358


Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

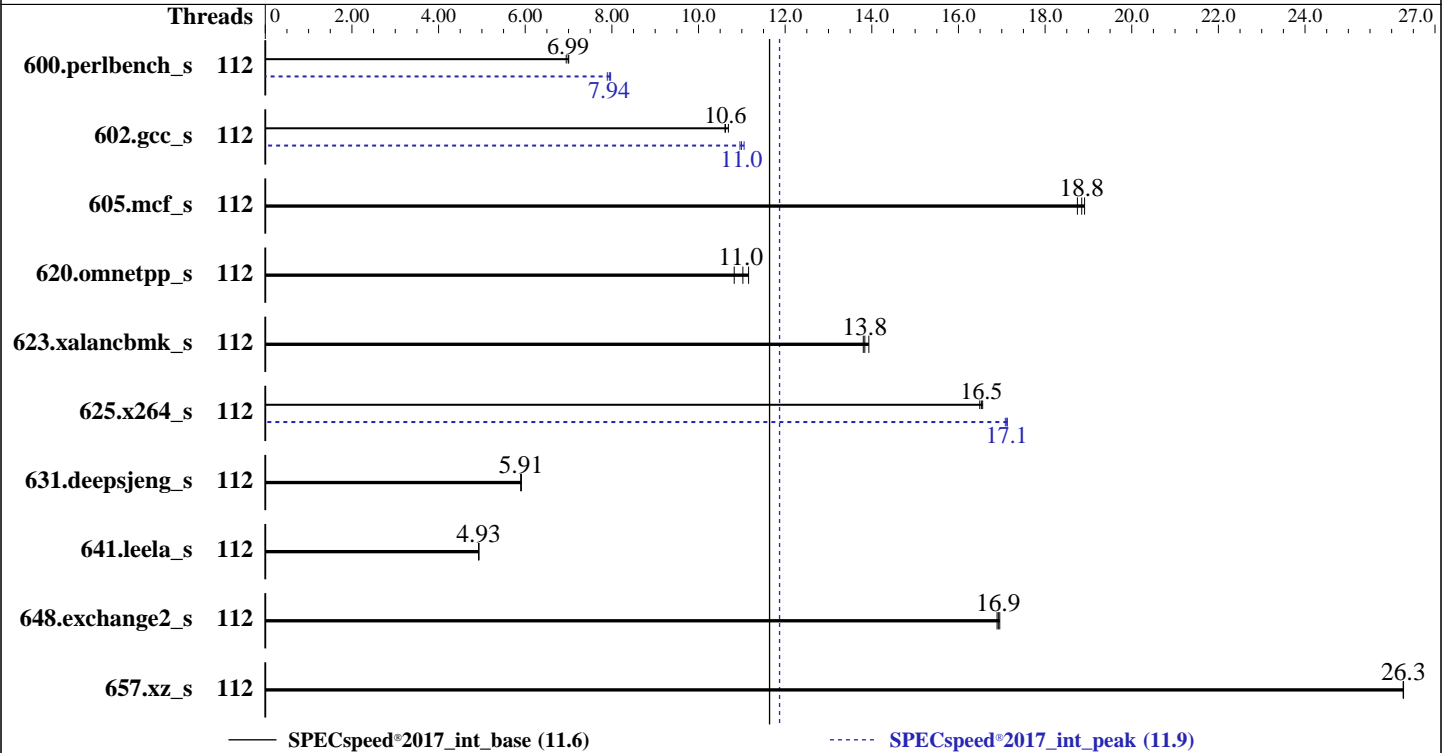

Hardware

CPU Name: Intel Xeon Platinum 8280M
 Max MHz: 4000
 Nominal: 2700
 Enabled: 112 cores, 4 chips
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 1 TB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.1 (Ootpa)
 4.18.0-147.el8.x86_64
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++
 Compiler Build 20200306 for Linux;
 Fortran: Version 19.1.1.217 of Intel Fortran
 Compiler Build 20200306 for Linux
 Parallel: Yes
 Firmware: Version 4.1.09 released Sep-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	256	6.95	253	7.00	<u>254</u>	<u>6.99</u>	112	225	7.89	<u>224</u>	<u>7.94</u>	223	7.97
602.gcc_s	112	372	10.7	<u>375</u>	<u>10.6</u>	375	10.6	112	360	11.1	<u>362</u>	<u>11.0</u>	363	11.0
605.mcf_s	112	250	18.9	<u>251</u>	<u>18.8</u>	252	18.7	112	250	18.9	<u>251</u>	<u>18.8</u>	252	18.7
620.omnetpp_s	112	146	11.2	151	10.8	<u>148</u>	<u>11.0</u>	112	146	11.2	151	10.8	<u>148</u>	<u>11.0</u>
623.xalancbmk_s	112	102	13.9	103	13.8	<u>102</u>	<u>13.8</u>	112	102	13.9	103	13.8	<u>102</u>	<u>13.8</u>
625.x264_s	112	107	16.6	<u>107</u>	<u>16.5</u>	107	16.5	112	103	17.1	103	17.1	<u>103</u>	<u>17.1</u>
631.deepsjeng_s	112	<u>243</u>	<u>5.91</u>	243	5.90	243	5.91	112	<u>243</u>	<u>5.91</u>	243	5.90	243	5.91
641.leela_s	112	346	4.93	<u>346</u>	<u>4.93</u>	346	4.93	112	346	4.93	<u>346</u>	<u>4.93</u>	346	4.93
648.exchange2_s	112	174	16.9	<u>174</u>	<u>16.9</u>	173	17.0	112	174	16.9	<u>174</u>	<u>16.9</u>	173	17.0
657.xz_s	112	235	26.3	235	26.3	<u>235</u>	<u>26.3</u>	112	235	26.3	235	26.3	<u>235</u>	<u>26.3</u>

SPECspeed®2017_int_base = **11.6**

SPECspeed®2017_int_peak = **11.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
SCALING_GOVERNOR set to Performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5,
and the system compiler gcc 4.8.5;
sources available from jemalloc.net or
<https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
ENERGY_PERF_BIAS_CFG mode set to Performance
Hardware Prefetch set to Disable
VT Support set to Disable
C1E Support set to Disable
IMC (Integrated memory controller) Interleaving set to 1-way
Sub NUMA Cluster (SNC) set to Enable
Intel Hyper Threading Technology set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on localhost.localdomain Mon Sep 21 10:09:31 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8280M CPU @ 2.70GHz
4 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```

cpu cores : 28
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
Thread(s) per core:    1
Core(s) per socket:    28
Socket(s):              4
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8280M CPU @ 2.70GHz
Stepping:               6
CPU MHz:                2796.675
CPU max MHz:            4000.0000
CPU min MHz:            1000.0000
BogoMIPS:               5400.00
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):     0-27
NUMA node1 CPU(s):     28-55
NUMA node2 CPU(s):     56-83
NUMA node3 CPU(s):     84-111
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdc_m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

```
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req pku
ospke avx512_vnni md_clear flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
node 0 size: 192113 MB
node 0 free: 191516 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 193530 MB
node 1 free: 193281 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 2 size: 193530 MB
node 2 free: 193322 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 193529 MB
node 3 free: 193325 MB
node distances:
node  0  1  2  3
 0:  10  21  21  21
 1:  21  10  21  21
 2:  21  21  10  21
 3:  21  21  21  10
```

```
From /proc/meminfo
MemTotal:      791249496 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Platform Notes (Continued)

PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"

ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

uname -a:

Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Sep 21 10:07

SPEC is set to: /home/CPU2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	839G	129G	711G	16%	/home

From /sys/devices/virtual/dmi/id

BIOS: Inspur 4.1.09 09/23/2019
 Vendor: Inspur
 Product: NF8480M5
 Product Family: TypelFamily
 Serial: 219598462

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x NO DIMM NO DIMM
 24x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Compiler Version Notes

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
          | 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
C          | 600.perlbench_s(peak)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
C          | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
          | 625.x264_s(base, peak) 657.xz_s(base, peak)
=====

```

```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
C          | 600.perlbench_s(peak)
=====

```

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
C++       | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
          | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

```

```

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1
NextGen Build 20200304
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran   | 648.exchange2_s(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Compiler Version Notes (Continued)

64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Base Optimization Flags (Continued)

C++ benchmarks (continued):

-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmallocc

Fortran benchmarks:

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -xCORE-AVX512
-O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-mbranches-within-32B-boundaries

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64(*) -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

(*) Indicates a portability flag that was found in a non-portability variable.

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed®2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

Peak Optimization Flags (Continued)

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -qnextgen -std=c11 -fuse-ld=gold
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-V1.9.xml>



SPEC CPU[®]2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Inspur Corporation

SPECspeed[®]2017_int_base = 11.6

Inspur NF8480M5 (Intel Xeon Platinum 8280M)

SPECspeed[®]2017_int_peak = 11.9

CPU2017 License: 3358

Test Sponsor: Inspur Corporation

Tested by: Inspur Corporation

Test Date: Sep-2020

Hardware Availability: Feb-2020

Software Availability: Apr-2020

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2017 v1.1.0 on 2020-09-21 10:09:30-0400.
Report generated on 2020-10-14 09:20:45 by CPU2017 PDF formatter v6255.
Originally published on 2020-10-13.