



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECspeed®2017_fp_base = 175

SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2021

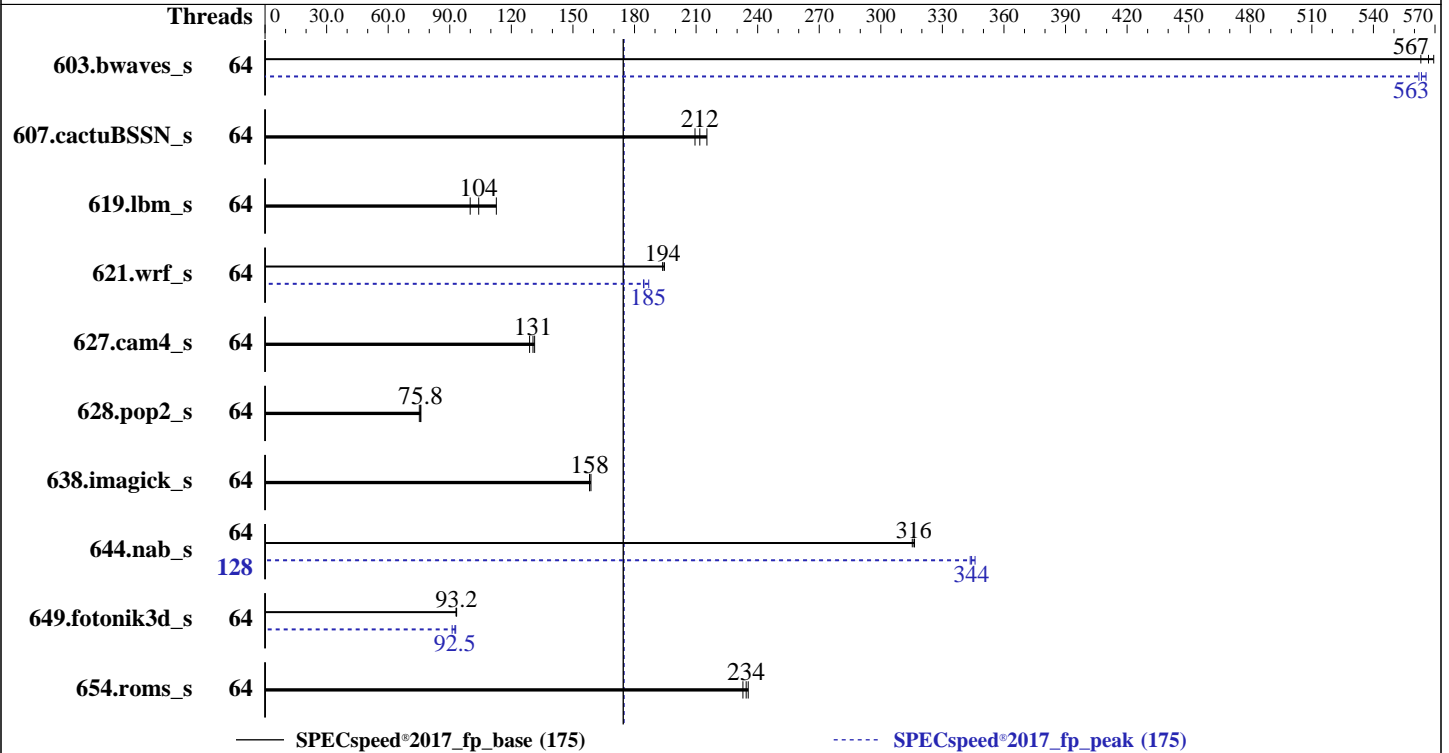

Hardware

CPU Name: Intel Xeon Gold 6338N
 Max MHz: 3500
 Nominal: 2200
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 48 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2666)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: CentOS Linux release 8.4.2105
 Kernel 4.18.0-305.3.1.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
 Parallel: Yes
 Firmware: Version 1.1a released Jun-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECspeed®2017_fp_base = 175

SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2021

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	105	563	104	569	104	567	64	105	562	105	563	104	566
607.cactuBSSN_s	64	79.6	209	78.7	212	77.4	215	64	79.6	209	78.7	212	77.4	215
619.lbm_s	64	46.5	113	52.4	99.9	50.3	104	64	46.5	113	52.4	99.9	50.3	104
621.wrf_s	64	68.0	195	68.3	194	68.2	194	64	71.7	184	71.6	185	70.8	187
627.cam4_s	64	68.8	129	67.9	131	67.5	131	64	68.8	129	67.9	131	67.5	131
628.pop2_s	64	156	75.9	158	75.2	157	75.8	64	156	75.9	158	75.2	157	75.8
638.imagick_s	64	90.8	159	91.2	158	91.2	158	64	90.8	159	91.2	158	91.2	158
644.nab_s	64	55.4	315	55.2	316	55.3	316	128	50.5	346	50.8	344	50.9	344
649.fotonik3d_s	64	97.7	93.3	98.0	93.1	97.8	93.2	64	100	91.2	98.1	92.9	98.5	92.5
654.roms_s	64	66.9	235	67.6	233	67.2	234	64	66.9	235	67.6	233	67.2	234

SPECspeed®2017_fp_base = **175**

SPECspeed®2017_fp_peak = **175**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled locally by Netweb
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECspeed®2017_fp_base = 175
SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Aug-2021
Hardware Availability: Apr-2021
Software Availability: Jul-2021

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology set to Custom
Power Performance Tuning set to BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode set to Performance
LLC Dead Line Alloc set to Disable

sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Mon Aug 23 13:34:17 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6338N CPU @ 2.20GHz
2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

From lscpu from util-linux 2.32.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECspeed®2017_fp_base = 175

SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2021

Platform Notes (Continued)

```

Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 6338N CPU @ 2.20GHz
BIOS Model name: Intel(R) Xeon(R) Gold 6338N CPU @ 2.20GHz
Stepping: 6
CPU MHz: 1704.465
CPU max MHz: 3500.0000
CPU min MHz: 800.0000
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 49152K
NUMA node0 CPU(s): 0-15,64-79
NUMA node1 CPU(s): 16-31,80-95
NUMA node2 CPU(s): 32-47,96-111
NUMA node3 CPU(s): 48-63,112-127
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid fsrm md_clear pconfig flush_l1d arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 49152 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 64 65 66 67 68 69 70 71 72 73 74 75
76 77 78 79

node 0 size: 128606 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECspeed®2017_fp_base = 175

SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2021

Platform Notes (Continued)

```

node 0 free: 96481 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 80 81 82 83 84 85 86 87 88
89 90 91 92 93 94 95
node 1 size: 129017 MB
node 1 free: 23985 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 96 97 98 99 100 101 102
103 104 105 106 107 108 109 110 111
node 2 size: 128979 MB
node 2 free: 109549 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 112 113 114 115 116 117
118 119 120 121 122 123 124 125 126 127
node 3 size: 129014 MB
node 3 free: 108285 MB
node distances:
node  0  1  2  3
  0: 10 11 20 20
  1: 11 10 20 20
  2: 20 20 10 11
  3: 20 20 11 10

```

From /proc/meminfo

```

MemTotal:      527992940 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

Current active profile: throughput-performance

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

From /etc/*release* /etc/*version*

```

centos-release: CentOS Linux release 8.4.2105
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.4
os-release:
  NAME="CentOS Linux"
  VERSION="8"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.4.2105
system-release: CentOS Linux release 8.4.2105
system-release-cpe: cpe:/o:centos:centos:8

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECspeed®2017_fp_base = 175

SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2021

Platform Notes (Continued)

uname -a:

```
Linux localhost.localdomain 4.18.0-305.3.1.el8.x86_64 #1 SMP Tue Jun 1 16:14:33 UTC
2021 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Aug 21 09:51

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/cl-home	xfs	372G	141G	232G	38%	/home

From /sys/devices/virtual/dmi/id

```
Vendor: Supermicro
Product: X12DPi-N(T)6
Product Family: SMC X12
Serial: 123456789
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Hynix HMA84GR7DJR4N-XN 32 GB 2 rank 3200, configured at 2666

BIOS:

```
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.1a
BIOS Date: 06/25/2021
BIOS Revision: 5.22
```

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECSpeed®2017_fp_base = 175

SPECSpeed®2017_fp_peak = 175

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2021

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base)
=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 644.nab_s(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base)
=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 644.nab_s(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECspeed®2017_fp_base = 175

SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2021

Compiler Version Notes (Continued)

```

=====
Fortran          | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
                  | 654.roms_s(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

```

=====
Fortran, C       | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)
=====

```

```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
=====

```

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECspeed®2017_fp_base = 175

SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Aug-2021
Hardware Availability: Apr-2021
Software Availability: Jul-2021

Base Portability Flags (Continued)

```
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

644.nab_s: icx

Fortran benchmarks:

ifort

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECSpeed®2017_fp_base = 175

SPECSpeed®2017_fp_peak = 175

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2021

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -fiopenmp  
-DSPEC_OPENMP -qopt-mem-layout-trans=4  
-fimf-accuracy-bits=14:sqrt  
-mbranches-within-32B-boundaries  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs  
-mbranches-within-32B-boundaries  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
649.fotonik3d_s: Same as 603.bwaves_s
```

```
654.roms_s: basepeak = yes
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)  
-prof-use(pass 2) -ipo -xCORE-AVX512 -O3 -no-prec-div
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero SDI100C2R-210
(2.20 GHz, Intel Xeon Gold 6338N)

SPECspeed®2017_fp_base = 175

SPECspeed®2017_fp_peak = 175

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Aug-2021

Hardware Availability: Apr-2021

Software Availability: Jul-2021

Peak Optimization Flags (Continued)

621.wrf_s (continued):

```
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revI.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revI.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-23 13:34:16-0400.

Report generated on 2021-09-20 13:58:42 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-20.