



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019


Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

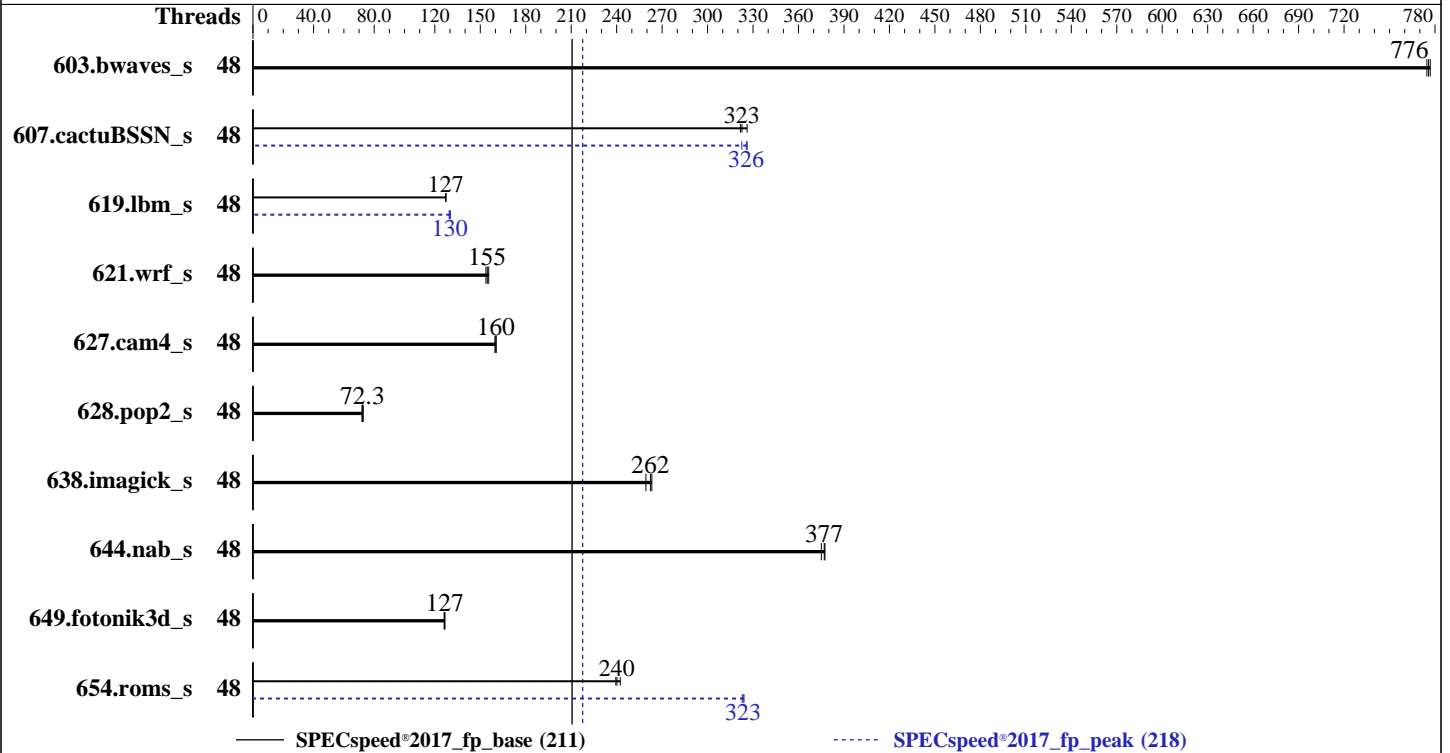

Hardware

CPU Name: AMD EPYC 74F3
 Max MHz: 4000
 Nominal: 3200
 Enabled: 48 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 3 cores
 Other: None
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 1 x 1.9 TB SSD SATA
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP3 (x86_64)
 kernel version 5.3.18-57-default
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 4.2.1c released Aug-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	76.2	775	<u>76.1</u>	<u>776</u>	75.9	777	48	76.2	775	<u>76.1</u>	<u>776</u>	75.9	777
607.cactuBSSN_s	48	51.8	322	51.1	326	<u>51.7</u>	<u>323</u>	48	51.1	326	51.7	323	<u>51.2</u>	<u>326</u>
619.lbm_s	48	41.2	127	<u>41.2</u>	<u>127</u>	41.1	127	48	40.2	130	<u>40.4</u>	<u>130</u>	40.5	129
621.wrf_s	48	<u>85.5</u>	<u>155</u>	85.0	156	86.0	154	48	<u>85.5</u>	<u>155</u>	85.0	156	86.0	154
627.cam4_s	48	55.2	160	55.5	160	<u>55.3</u>	<u>160</u>	48	55.2	160	55.5	160	<u>55.3</u>	<u>160</u>
628.pop2_s	48	<u>164</u>	<u>72.3</u>	163	72.8	165	71.9	48	<u>164</u>	<u>72.3</u>	163	72.8	165	71.9
638.imagick_s	48	<u>55.0</u>	<u>262</u>	55.6	259	54.8	263	48	<u>55.0</u>	<u>262</u>	55.6	259	54.8	263
644.nab_s	48	46.6	375	<u>46.3</u>	<u>377</u>	46.3	377	48	46.6	375	<u>46.3</u>	<u>377</u>	46.3	377
649.fotonik3d_s	48	72.0	127	<u>72.0</u>	<u>127</u>	72.3	126	48	72.0	127	<u>72.0</u>	<u>127</u>	72.3	126
654.roms_s	48	<u>65.5</u>	<u>240</u>	65.0	242	65.8	239	48	<u>48.7</u>	<u>323</u>	48.8	323	48.6	324

SPECspeed®2017_fp_base = 211

SPECspeed®2017_fp_peak = 218

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Operating System Notes (Continued)

integer runs and all FP runs to enable Transparent Hugepages (THP).
'cpupower frequency-set -g performance' run as root to set the scaling governor to performance.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-47"
LD_LIBRARY_PATH =
"/home/cpu2017/amd_speed_aocc300_milan_B_lib/lib;/home/cpu2017/amd_speed_aocc300_milan_B_lib/lib32:"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "16G"
OMP_THREAD_LIMIT = "48"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-47"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-47"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Nov-2021
Hardware Availability: Jun-2021
Software Availability: Jun-2021

Platform Notes

BIOS Configuration

SMT Mode set to Disabled
NUMA nodes per socket set to NPS1
ACPI SRAT L3 Cache As NUMA Domain set to Enabled
DRAM Scrub Time set to Disabled
Determinism Slider set to Power
L1 Stream HW Prefetcher set to Enabled
APBDIS set to 1

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost Thu Nov 4 05:03:53 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 74F3 24-Core Processor
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 24
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

From lscpu from util-linux 2.36.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 48
On-line CPU(s) list: 0-47
Thread(s) per core: 1
Core(s) per socket: 24
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 74F3 24-Core Processor
Stepping: 1
Frequency boost: enabled
CPU MHz: 3700.991
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

Platform Notes (Continued)

```

CPU max MHz: 3200.0000
CPU min MHz: 1500.0000
BogoMIPS: 6388.63
Virtualization: AMD-V
L1d cache: 1.5 MiB
L1i cache: 1.5 MiB
L2 cache: 24 MiB
L3 cache: 512 MiB
NUMA node0 CPU(s): 0-2
NUMA node1 CPU(s): 3-5
NUMA node2 CPU(s): 6-8
NUMA node3 CPU(s): 9-11
NUMA node4 CPU(s): 12-14
NUMA node5 CPU(s): 15-17
NUMA node6 CPU(s): 18-20
NUMA node7 CPU(s): 21-23
NUMA node8 CPU(s): 24-26
NUMA node9 CPU(s): 27-29
NUMA node10 CPU(s): 30-32
NUMA node11 CPU(s): 33-35
NUMA node12 CPU(s): 36-38
NUMA node13 CPU(s): 39-41
NUMA node14 CPU(s): 42-44
NUMA node15 CPU(s): 45-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx
smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Date: Nov-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

Platform Notes (Continued)

pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov
succor smca fsmr

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	512K	24M	8	Unified	2	1024	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0 1 2

node 0 size: 128839 MB

node 0 free: 128622 MB

node 1 cpus: 3 4 5

node 1 size: 129022 MB

node 1 free: 128944 MB

node 2 cpus: 6 7 8

node 2 size: 129022 MB

node 2 free: 128949 MB

node 3 cpus: 9 10 11

node 3 size: 129022 MB

node 3 free: 128963 MB

node 4 cpus: 12 13 14

node 4 size: 129022 MB

node 4 free: 128944 MB

node 5 cpus: 15 16 17

node 5 size: 129022 MB

node 5 free: 128964 MB

node 6 cpus: 18 19 20

node 6 size: 129022 MB

node 6 free: 128940 MB

node 7 cpus: 21 22 23

node 7 size: 116910 MB

node 7 free: 116677 MB

node 8 cpus: 24 25 26

node 8 size: 129022 MB

node 8 free: 128944 MB

node 9 cpus: 27 28 29

node 9 size: 129022 MB

node 9 free: 128943 MB

node 10 cpus: 30 31 32

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Platform Notes (Continued)

```

node 10 size: 129022 MB
node 10 free: 128945 MB
node 11 cpus: 33 34 35
node 11 size: 129022 MB
node 11 free: 128962 MB
node 12 cpus: 36 37 38
node 12 size: 129022 MB
node 12 free: 128950 MB
node 13 cpus: 39 40 41
node 13 size: 128988 MB
node 13 free: 128913 MB
node 14 cpus: 42 43 44
node 14 size: 129022 MB
node 14 free: 128941 MB
node 15 cpus: 45 46 47
node 15 size: 129017 MB
node 15 free: 128907 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0: 10 11 11 11 11 11 11 11 11 32 32 32 32 32 32 32
 1: 11 10 11 11 11 11 11 11 11 32 32 32 32 32 32 32
 2: 11 11 10 11 11 11 11 11 11 32 32 32 32 32 32 32
 3: 11 11 11 10 11 11 11 11 11 32 32 32 32 32 32 32
 4: 11 11 11 11 10 11 11 11 11 32 32 32 32 32 32 32
 5: 11 11 11 11 11 10 11 11 11 32 32 32 32 32 32 32
 6: 11 11 11 11 11 11 10 11 11 32 32 32 32 32 32 32
 7: 11 11 11 11 11 11 11 10 11 32 32 32 32 32 32 32
 8: 32 32 32 32 32 32 32 32 10 11 11 11 11 11 11 11
 9: 32 32 32 32 32 32 32 32 11 10 11 11 11 11 11 11
10: 32 32 32 32 32 32 32 32 11 11 10 11 11 11 11 11
11: 32 32 32 32 32 32 32 32 11 11 11 10 11 11 11 11
12: 32 32 32 32 32 32 32 32 11 11 11 11 10 11 11 11
13: 32 32 32 32 32 32 32 32 11 11 11 11 11 10 11 11
14: 32 32 32 32 32 32 32 32 11 11 11 11 11 11 10 11
15: 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 10

```

From /proc/meminfo

MemTotal: 2101278936 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

NAME="SLES"

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Nov-2021
Hardware Availability: Jun-2021
Software Availability: Jun-2021

Platform Notes (Continued)

```
VERSION="15-SP3"
VERSION_ID="15.3"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp3"
```

```
uname -a:
Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 3 Nov 3 18:12
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p3  xfs   1.5T  12G  1.5T   1% /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Cisco Systems Inc
Product:         UCSC-C225-M6N
Serial:          WZP25230TMY
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
16x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Platform Notes (Continued)

BIOS:

BIOS Vendor: Cisco Systems, Inc.
 BIOS Version: C225M6.4.2.1c.0.0806211349
 BIOS Date: 08/06/2021
 BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
  | 644.nab_s(base, peak)
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

```
=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
        | 654.roms_s(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECSpeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECSpeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Compiler Version Notes (Continued)

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

```

-----
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                  | 628.pop2_s(base, peak)

```

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)

```

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

```

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)

```

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Base Portability Flags (Continued)

```
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```

619.lbm_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

```

638.imagick_s: basepeak = yes

644.nab_s: basepeak = yes

Fortran benchmarks:

603.bwaves_s: basepeak = yes

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECSpeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECSpeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Peak Optimization Flags (Continued)

649.fotonik3d_s: basepeak = yes

```

654.roms_s: -m64 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm
-ljemalloc -lflang

```

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

627.cam4_s: basepeak = yes

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```

-m64 -mno-adx -mno-sse4a -std=c++98
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

```

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017_fp_base = 211

Cisco UCS C225 M6 (AMD EPYC 74F3 24-Core)

SPECspeed®2017_fp_peak = 218

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Nov-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-11-04 08:03:53-0400.

Report generated on 2021-11-24 11:20:07 by CPU2017 PDF formatter v6442.

Originally published on 2021-11-23.