



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

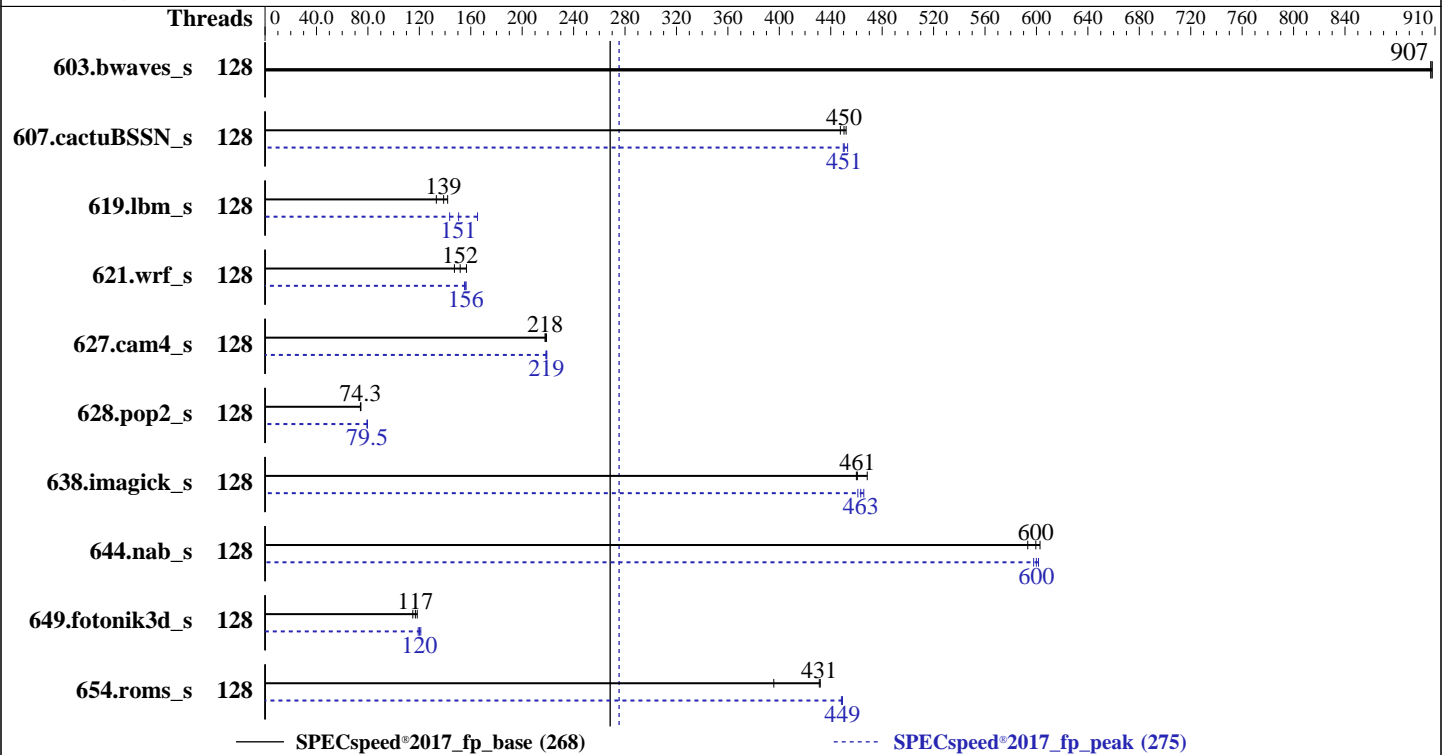

Hardware

CPU Name: AMD EPYC 7773X
 Max MHz: 3500
 Nominal: 2200
 Enabled: 128 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 768 MB I+D on chip per chip,
 96 MB shared / 8 cores
 Other: None
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 1 x 400 GB SAS SSD
 Other: None

Software

OS: Ubuntu 20.04.2 LTS (x86_64)
 Kernel 5.13.0-28-generic
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: Yes
 Firmware: HPE BIOS Version A42 v2.56 02/10/2022 released
 Feb-2022
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	65.1	907	<u>65.1</u>	<u>907</u>	65.0	908	128	65.1	907	<u>65.1</u>	<u>907</u>	65.0	908
607.cactuBSSN_s	128	36.9	452	37.3	447	<u>37.0</u>	<u>450</u>	128	<u>37.0</u>	<u>451</u>	36.8	453	37.1	450
619.lbm_s	128	<u>37.7</u>	<u>139</u>	36.9	142	39.3	133	128	31.7	165	<u>34.8</u>	<u>151</u>	36.5	144
621.wrf_s	128	89.8	147	84.4	157	<u>87.1</u>	<u>152</u>	128	84.7	156	<u>84.7</u>	<u>156</u>	85.3	155
627.cam4_s	128	<u>40.7</u>	<u>218</u>	40.7	218	40.5	219	128	<u>40.5</u>	<u>219</u>	40.6	218	40.4	219
628.pop2_s	128	<u>160</u>	<u>74.3</u>	160	74.2	159	74.5	128	150	79.4	<u>149</u>	<u>79.5</u>	149	79.6
638.imagick_s	128	31.4	460	30.8	468	<u>31.3</u>	<u>461</u>	128	31.0	466	31.3	461	<u>31.1</u>	<u>463</u>
644.nab_s	128	29.0	603	29.5	593	<u>29.1</u>	<u>600</u>	128	29.2	598	<u>29.1</u>	<u>600</u>	29.0	602
649.fotonik3d_s	128	79.3	115	77.0	118	<u>78.0</u>	<u>117</u>	128	<u>75.9</u>	<u>120</u>	76.5	119	75.2	121
654.roms_s	128	36.5	432	<u>36.5</u>	<u>431</u>	39.8	396	128	35.1	448	<u>35.1</u>	<u>449</u>	35.1	449

SPECspeed®2017_fp_base = **268**

SPECspeed®2017_fp_peak = **275**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.  
To enable THP only on request for peak runs of 628.pop2_s:  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.  
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,  
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:  
GOMP_CPU_AFFINITY = "0-127"  
LD_LIBRARY_PATH =  
    "/home/cpu2017_speed/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017_sp  
    eed/amd_speed_aocc320_milanx_A_lib/lib32:"  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOCONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "128"
```

```
Environment variables set by runcpu during the 607.cactuBSSN_s peak run:  
GOMP_CPU_AFFINITY = "0-127"
```

```
Environment variables set by runcpu during the 619.lbm_s peak run:  
GOMP_CPU_AFFINITY = "0-127"
```

```
Environment variables set by runcpu during the 621.wrf_s peak run:  
GOMP_CPU_AFFINITY = "0-127"
```

```
Environment variables set by runcpu during the 627.cam4_s peak run:  
GOMP_CPU_AFFINITY = "0-127"
```

```
Environment variables set by runcpu during the 628.pop2_s peak run:  
GOMP_CPU_AFFINITY = "0-127"
```

```
Environment variables set by runcpu during the 638.imagick_s peak run:  
GOMP_CPU_AFFINITY = "0-127"
```

```
Environment variables set by runcpu during the 644.nab_s peak run:  
GOMP_CPU_AFFINITY = "0-127"
```

```
Environment variables set by runcpu during the 649.fotonik3d_s peak run:  
GOMP_CPU_AFFINITY = "0-127"  
PGHPPF_ZMEM = "yes"
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Environment Variables Notes (Continued)

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-127"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

AMD SMT Option set to Disabled

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Last-Level Cache (LLC) as NUMA Node set to Enabled

NUMA memory domains per socket set to One memory domain per socket

Thermal Configuration set to Maximum Cooling

Infinity Fabric Power Management set to Disabled

Infinity Fabric Performance State set to P0

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The system date and time as discovered by sysinfo is incorrect as the time was not updated prior to the run. The test_date field shows an accurate date for the result.

The system ROM used for this result contains microcode version 0x 0A001227h for the AMD EPYC 7nn3X family of processors. The reference code/AGESA version used in this ROM is version MilanPI 1.0.0.8.

Sysinfo program /home/cpu2017_speed/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on cpu2017-ProLiant-DL365-Gen10-Plus Mon Jan 10 14:17:09 2022

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7773X 64-Core Processor
 2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

From lscpu from util-linux 2.34:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 128
On-line CPU(s) list: 0-127
Thread(s) per core: 1
Core(s) per socket: 64
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7773X 64-Core Processor
Stepping: 2
Frequency boost: enabled
CPU MHz: 2200.000
CPU max MHz: 2200.0000
CPU min MHz: 1500.0000
BogoMIPS: 4392.18
Virtualization: AMD-V
L1d cache: 4 MiB
L1i cache: 4 MiB
L2 cache: 64 MiB
L3 cache: 1.5 GiB
NUMA node0 CPU(s): 0-7
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Platform Notes (Continued)

```

NUMA node1 CPU(s):      8-15
NUMA node2 CPU(s):      16-23
NUMA node3 CPU(s):      24-31
NUMA node4 CPU(s):      32-39
NUMA node5 CPU(s):      40-47
NUMA node6 CPU(s):      48-55
NUMA node7 CPU(s):      56-63
NUMA node8 CPU(s):      64-71
NUMA node9 CPU(s):      72-79
NUMA node10 CPU(s):     80-87
NUMA node11 CPU(s):     88-95
NUMA node12 CPU(s):     96-103
NUMA node13 CPU(s):    104-111
NUMA node14 CPU(s):    112-119
NUMA node15 CPU(s):    120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	4M	8	Data	1
L1i	32K	4M	8	Instruction	1
L2	512K	64M	8	Unified	2
L3	96M	1.5G	16	Unified	3

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 128710 MB
node 0 free: 127807 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 129021 MB
node 1 free: 128927 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 128988 MB
node 2 free: 128677 MB
node 3 cpus: 24 25 26 27 28 29 30 31
node 3 size: 129021 MB
node 3 free: 128925 MB
node 4 cpus: 32 33 34 35 36 37 38 39
node 4 size: 129021 MB
node 4 free: 128805 MB
node 5 cpus: 40 41 42 43 44 45 46 47
node 5 size: 129021 MB
node 5 free: 128855 MB
node 6 cpus: 48 49 50 51 52 53 54 55
node 6 size: 129021 MB
node 6 free: 128724 MB
node 7 cpus: 56 57 58 59 60 61 62 63
node 7 size: 116908 MB
node 7 free: 116792 MB
node 8 cpus: 64 65 66 67 68 69 70 71
node 8 size: 129021 MB
node 8 free: 128946 MB
node 9 cpus: 72 73 74 75 76 77 78 79
node 9 size: 129021 MB
node 9 free: 128944 MB
node 10 cpus: 80 81 82 83 84 85 86 87
node 10 size: 129021 MB
node 10 free: 128947 MB
node 11 cpus: 88 89 90 91 92 93 94 95
node 11 size: 129021 MB
node 11 free: 128916 MB
node 12 cpus: 96 97 98 99 100 101 102 103
node 12 size: 129021 MB
node 12 free: 128915 MB
node 13 cpus: 104 105 106 107 108 109 110 111
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Platform Notes (Continued)

```

node 13 size: 129021 MB
node 13 free: 128945 MB
node 14 cpus: 112 113 114 115 116 117 118 119
node 14 size: 129021 MB
node 14 free: 128876 MB
node 15 cpus: 120 121 122 123 124 125 126 127
node 15 size: 129012 MB
node 15 free: 128936 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32
1:  11 10 11 11 11 11 11 11 32 32 32 32 32 32 32 32
2:  11 11 10 11 11 11 11 11 32 32 32 32 32 32 32 32
3:  11 11 11 10 11 11 11 11 32 32 32 32 32 32 32 32
4:  11 11 11 11 10 11 11 11 32 32 32 32 32 32 32 32
5:  11 11 11 11 11 10 11 11 32 32 32 32 32 32 32 32
6:  11 11 11 11 11 11 10 11 32 32 32 32 32 32 32 32
7:  11 11 11 11 11 11 11 10 32 32 32 32 32 32 32 32
8:  32 32 32 32 32 32 32 32 10 11 11 11 11 11 11 11
9:  32 32 32 32 32 32 32 32 11 10 11 11 11 11 11 11
10: 32 32 32 32 32 32 32 32 11 11 10 11 11 11 11 11
11: 32 32 32 32 32 32 32 32 11 11 11 10 11 11 11 11
12: 32 32 32 32 32 32 32 32 11 11 11 11 10 11 11 11
13: 32 32 32 32 32 32 32 32 11 11 11 11 11 10 11 11
14: 32 32 32 32 32 32 32 32 11 11 11 11 11 11 10 11
15: 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 10

```

```

From /proc/meminfo
MemTotal:      2101125640 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

/usr/bin/lsb_release -d
Ubuntu 20.04.2 LTS

```

```

From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
NAME="Ubuntu"
VERSION="20.04.2 LTS (Focal Fossa)"
ID=ubuntu

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Platform Notes (Continued)

```
ID_LIKE=debian
PRETTY_NAME="Ubuntu 20.04.2 LTS"
VERSION_ID="20.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

uname -a:

```
Linux cpu2017-ProLiant-DL365-Gen10-Plus 5.13.0-28-generic #31~20.04.1-Ubuntu SMP Wed
Jan 19 14:08:10 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Jan 10 10:27

SPEC is set to: /home/cpu2017_speed

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	366G	69G	279G	20%	/

From /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:    ProLiant DL365 Gen10 Plus
Product Family: ProLiant
Serial:     CN70430NKN
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
16x Samsung M386AAG40AM3-CWE 128 GB 4 rank 3200
16x UNKNOWN NOT AVAILABLE
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Platform Notes (Continued)

BIOS:

BIOS Vendor: HPE
BIOS Version: A42
BIOS Date: 02/10/2022
BIOS Revision: 2.56
Firmware Revision: 2.55

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Compiler Version Notes (Continued)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
628.pop2_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Base Portability Flags (Continued)

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

```
638.imagick_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -freemap-arrays
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Peak Optimization Flags (Continued)

638.imagick_s (continued):

```
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

603.bwaves_s: basepeak = yes

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

```
654.roms_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2022
Hardware Availability: Mar-2021
Software Availability: Jan-2022

Peak Optimization Flags (Continued)

621.wrf_s (continued):

```
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -Mrecursive  
-mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop  
-mllvm -enable-loopinterchange  
-mllvm -compute-interchange-order -DSPEC_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

627.cam4_s: Same as 621.wrf_s

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50  
-fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -Mrecursive  
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true -mllvm -function-specialize  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch -Mrecursive  
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP -fopenmp=libomp  
-lomp -lamdlibm -ljemalloc -lflang
```




SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus v2
(2.20 GHz, AMD EPYC 7773X)

SPECspeed®2017_fp_base = 268

SPECspeed®2017_fp_peak = 275

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.html>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revR.xml>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-01-10 03:47:09-0500.

Report generated on 2022-04-01 13:23:17 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-21.