



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

**SPECSpeed®2017\_int\_base = 12.8**

**SPECSpeed®2017\_int\_peak = 13.0**

CPU2017 License: 001176


Test Date: Feb-2022

Test Sponsor: Supermicro

Hardware Availability: Mar-2022

Tested by: Supermicro

Software Availability: Feb-2022

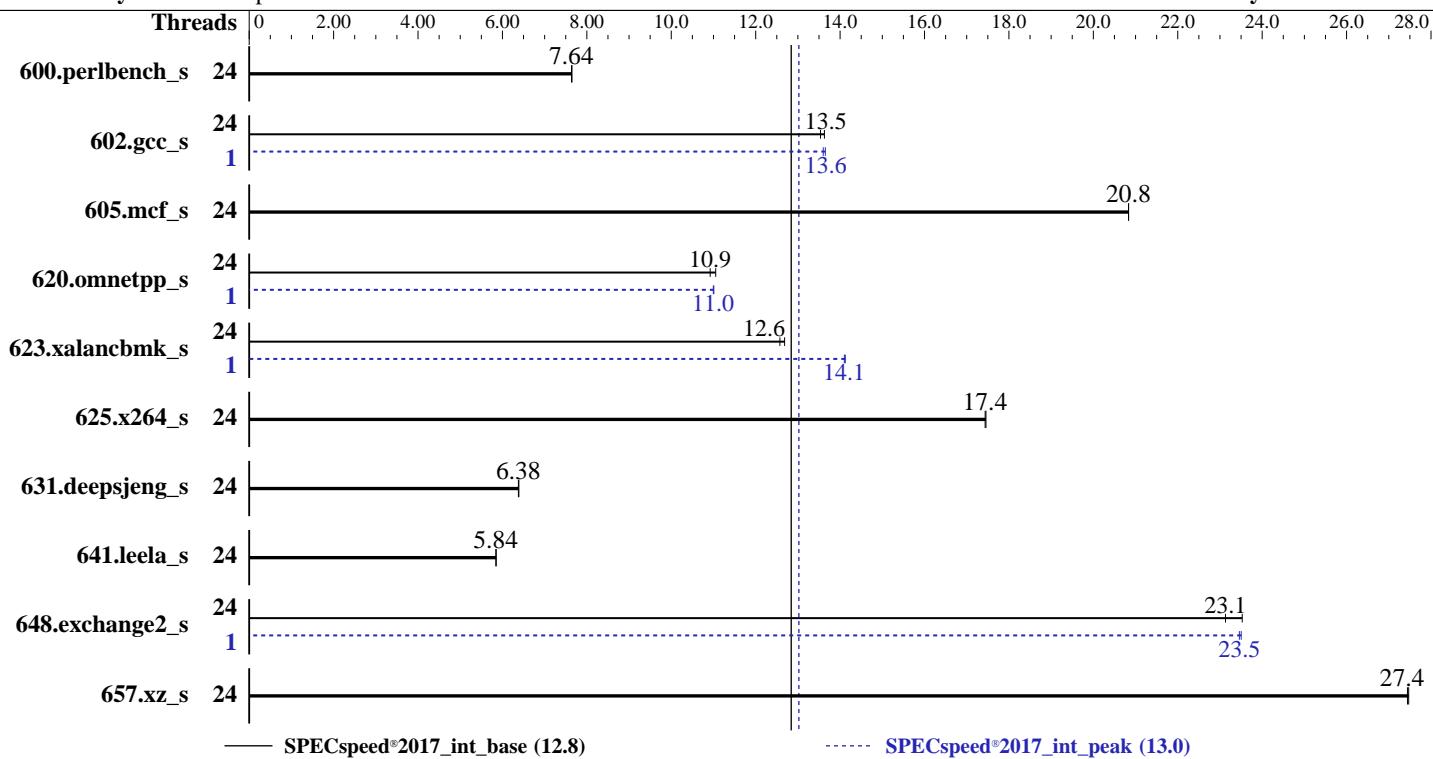

Hardware		Software	
CPU Name:	AMD EPYC 7473X	OS:	Ubuntu 20.04.3 LTS
Max MHz:	3700	Compiler:	Kernel 5.4.0-100-generic
Nominal:	2800	Parallel:	C/C++/Fortran: Version 3.2.0 of AOCC
Enabled:	24 cores, 1 chip, 2 threads/core	Firmware:	Yes
Orderable:	1 chip	File System:	Version 2.4 released Feb-2022
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	ext4
L2:	512 KB I+D on chip per core	Base Pointers:	Run level 5 (multi-user)
L3:	768 MB I+D on chip per chip, 96 MB shared / 3 cores	Peak Pointers:	64-bit
Other:	None	Other:	64-bit
Memory:	512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)	Power Management:	jemalloc: jemalloc memory allocator library v5.1.0
Storage:	1 x 3 TB SATA III, 7200 RPM		BIOS and OS set to prefer performance at the cost of additional power usage.
Other:	None		



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

SPECspeed®2017\_int\_base = 12.8

SPECspeed®2017\_int\_peak = 13.0

CPU2017 License: 001176

Test Date: Feb-2022

Test Sponsor: Supermicro

Hardware Availability: Mar-2022

Tested by: Supermicro

Software Availability: Feb-2022

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	24	232	7.65	<u>232</u>	<u>7.64</u>			24	232	7.65	<u>232</u>	<u>7.64</u>				
602.gcc_s	24	292	13.6	<u>294</u>	<u>13.5</u>			1	292	13.7	<u>293</u>	<u>13.6</u>				
605.mcf_s	24	<u>227</u>	<u>20.8</u>	227	20.8			24	<u>227</u>	<u>20.8</u>	227	20.8				
620.omnetpp_s	24	<u>149</u>	<u>10.9</u>	148	11.1			1	<u>148</u>	<u>11.0</u>	148	11.0				
623.xalancbmk_s	24	<u>113</u>	<u>12.6</u>	112	12.7			1	100	14.1	<u>100</u>	<u>14.1</u>				
625.x264_s	24	<u>101</u>	<u>17.4</u>	101	17.5			24	<u>101</u>	<u>17.4</u>	101	17.5				
631.deepsjeng_s	24	224	6.39	<u>225</u>	<u>6.38</u>			24	224	6.39	<u>225</u>	<u>6.38</u>				
641.leela_s	24	291	5.85	<u>292</u>	<u>5.84</u>			24	291	5.85	<u>292</u>	<u>5.84</u>				
648.exchange2_s	24	<u>127</u>	<u>23.1</u>	125	23.5			1	125	23.5	<u>125</u>	<u>23.5</u>				
657.xz_s	24	225	27.5	<u>225</u>	<u>27.4</u>			24	225	27.5	<u>225</u>	<u>27.4</u>				
SPECspeed®2017_int_base = 12.8								SPECspeed®2017_int_peak = 13.0								

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 12.8

SPECspeed®2017\_int\_peak = 13.0

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-47"  
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_spee  
    d_aocc320_milanx_A_lib/lib32:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "48"
```

Environment variables set by runcpu during the 602.gcc\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 648.exchange2\_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 12.8

SPECspeed®2017\_int\_peak = 13.0

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

## Platform Notes

### BIOS Settings:

Determinism Control = Manual

Determinism Slider = Power

cTDP Control = Manual

cTDP = 280

Package Power Limit Control = Manual

Package Power Limit = 280

APBDIS = 1

NUMA Nodes Per Socket = NPS4

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d

running on h12ssw-an6-7473x Fri Feb 18 19:26:47 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7473X 24-Core Processor
  1 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings : 48
  physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

From lscpu from util-linux 2.34:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
Address sizes:	48 bits physical, 48 bits virtual
CPU(s):	48
On-line CPU(s) list:	0-47
Thread(s) per core:	2
Core(s) per socket:	24
Socket(s):	1
NUMA node(s):	8
Vendor ID:	AuthenticAMD
CPU family:	25
Model:	1
Model name:	AMD EPYC 7473X 24-Core Processor
Stepping:	2
Frequency boost:	enabled
CPU MHz:	2728.955
CPU max MHz:	2800.0000

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

**SPECspeed®2017\_int\_base = 12.8**

**SPECspeed®2017\_int\_peak = 13.0**

CPU2017 License: 001176

Test Date: Feb-2022

Test Sponsor: Supermicro

Hardware Availability: Mar-2022

Tested by: Supermicro

Software Availability: Feb-2022

## Platform Notes (Continued)

CPU min MHz:	1500.0000
BogoMIPS:	5599.63
Virtualization:	AMD-V
L1d cache:	768 KiB
L1i cache:	768 KiB
L2 cache:	12 MiB
L3 cache:	768 MiB
NUMA node0 CPU(s):	0-2,24-26
NUMA node1 CPU(s):	3-5,27-29
NUMA node2 CPU(s):	6-8,30-32
NUMA node3 CPU(s):	9-11,33-35
NUMA node4 CPU(s):	12-14,36-38
NUMA node5 CPU(s):	15-17,39-41
NUMA node6 CPU(s):	18-20,42-44
NUMA node7 CPU(s):	21-23,45-47
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Full AMD retrpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf perf_pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	768K	8	Data	1
L1i	32K	768K	8	Instruction	1
L2	512K	12M	8	Unified	2
L3	96M	768M	16	Unified	3

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Supermicro**

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

**SPECspeed®2017\_int\_base = 12.8**

**SPECspeed®2017\_int\_peak = 13.0**

**CPU2017 License:** 001176

**Test Date:** Feb-2022

**Test Sponsor:** Supermicro

**Hardware Availability:** Mar-2022

**Tested by:** Supermicro

**Software Availability:** Feb-2022

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
    cache size : 512 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 24 25 26
node 0 size: 64387 MB
node 0 free: 64056 MB
node 1 cpus: 3 4 5 27 28 29
node 1 size: 64508 MB
node 1 free: 64261 MB
node 2 cpus: 6 7 8 30 31 32
node 2 size: 64510 MB
node 2 free: 63977 MB
node 3 cpus: 9 10 11 33 34 35
node 3 size: 64509 MB
node 3 free: 64369 MB
node 4 cpus: 12 13 14 36 37 38
node 4 size: 64510 MB
node 4 free: 64242 MB
node 5 cpus: 15 16 17 39 40 41
node 5 size: 64480 MB
node 5 free: 64259 MB
node 6 cpus: 18 19 20 42 43 44
node 6 size: 64510 MB
node 6 free: 63020 MB
node 7 cpus: 21 22 23 45 46 47
node 7 size: 64496 MB
node 7 free: 64277 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 11 12 12 12 12 12 12
  1: 11 10 12 12 12 12 12 12
  2: 12 12 10 11 12 12 12 12
  3: 12 12 11 10 12 12 12 12
  4: 12 12 12 12 10 11 12 12
  5: 12 12 12 12 11 10 12 12
  6: 12 12 12 12 12 12 10 11
  7: 12 12 12 12 12 12 11 10
```

From /proc/meminfo

```
MemTotal:      528295992 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 12.8

SPECspeed®2017\_int\_peak = 13.0

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

## Platform Notes (Continued)

performance

```
/usr/bin/lsb_release -d
Ubuntu 20.04.3 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
  NAME="Ubuntu"
  VERSION="20.04.3 LTS (Focal Fossa)"
  ID=ubuntu
  ID_LIKE=debian
  PRETTY_NAME="Ubuntu 20.04.3 LTS"
  VERSION_ID="20.04"
  HOME_URL="https://www.ubuntu.com/"
  SUPPORT_URL="https://help.ubuntu.com/"
```

uname -a:

```
Linux h12ssw-an6-7473x 5.4.0-100-generic #113-Ubuntu SMP Thu Feb 3 18:43:29 UTC 2022
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Feb 18 07:53

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  2.7T  17G  2.6T   1%  /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Supermicro
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 12.8

SPECspeed®2017\_int\_peak = 13.0

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

## Platform Notes (Continued)

Product: Super Server  
Serial: 0123456789

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron Technology 36ASF4G72PZ-3G2J3 32 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor: American Megatrends Inc.  
BIOS Version: 2.4  
BIOS Date: 02/07/2022  
BIOS Revision: 5.22

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base,  
| peak) 625.x264\_s(base, peak) 657.xz\_s(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

=====

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on  
LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====

=====

Fortran | 648.exchange2\_s(base, peak)

=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 12.8

SPECspeed®2017\_int\_peak = 13.0

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

## Compiler Version Notes (Continued)

LLVM Mirror.Version.13.0.0)  
Target : x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

---

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -futo -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 12.8

SPECspeed®2017\_int\_peak = 13.0

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs  
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100  
-finline-aggressive -flv-function-specialization  
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes  
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true  
-mllvm -convert-pow-exp-to-int=false -z muldefs  
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -z muldefs  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 12.8

SPECspeed®2017\_int\_peak = 13.0

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: -m64 -Wl,-allow-multiple-definition  
-Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50  
-fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

605.mcf\_s: basepeak = yes

625.x264\_s: basepeak = yes

657.xz\_s: basepeak = yes

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

CPU2017 License: 001176

Test Sponsor: Supermicro

Tested by: Supermicro

SPECspeed®2017\_int\_base = 12.8

SPECspeed®2017\_int\_peak = 13.0

Test Date: Feb-2022

Hardware Availability: Mar-2022

Software Availability: Feb-2022

## Peak Optimization Flags (Continued)

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp=libomp -lomp
-lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 2014CS-TR  
(H12SSW-AN6 , AMD EPYC 7473X)

SPECspeed®2017\_int\_base = 12.8

SPECspeed®2017\_int\_peak = 13.0

CPU2017 License: 001176

Test Date: Feb-2022

Test Sponsor: Supermicro

Hardware Availability: Mar-2022

Tested by: Supermicro

Software Availability: Feb-2022

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-18 14:26:47-0500.

Report generated on 2022-03-22 10:59:07 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-22.