



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

### QuantaGrid D43K-1U

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9050


Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

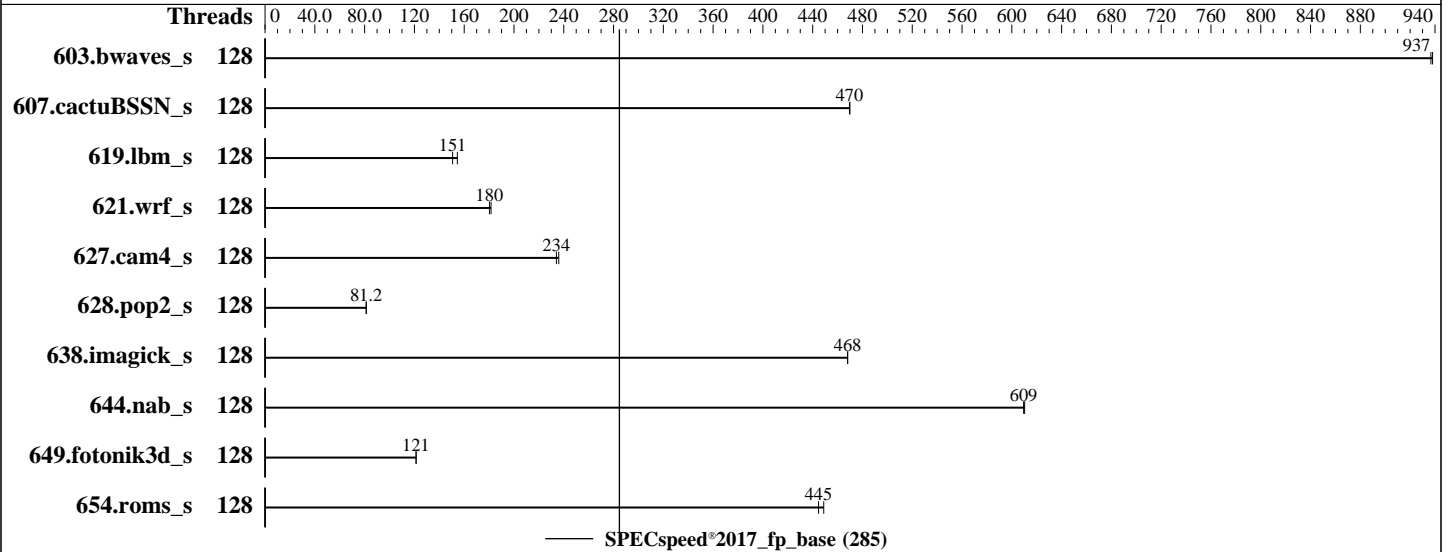

### Hardware

CPU Name: AMD EPYC 7773X  
 Max MHz: 3500  
 Nominal: 2200  
 Enabled: 128 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 768 MB I+D on chip per chip, 96 MB shared / 8 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4DRx4 PC4-3200AA-L)  
 Storage: 1 x 480GB SATA SSD  
 Other: None

### Software

OS: Ubuntu 20.04 LTS (x86\_64)  
 kernel 5.4.0-96-generic  
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 3C07.Q101 released Oct-2021  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Quanta Cloud Technology

(Test Sponsor: Quanta Computer Inc.)

QuantaGrid D43K-1U

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9050

Test Sponsor: Quanta Computer Inc.

Tested by: Quanta Computer Inc.

Test Date: Feb-2022

Hardware Availability: Mar-2021

Software Availability: Jan-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	128	62.9	938	<b><u>63.0</u></b>	<b><u>937</u></b>									
607.cactuBSSN_s	128	35.5	470	<b><u>35.5</u></b>	<b><u>470</u></b>									
619.lbm_s	128	33.9	154	<b><u>34.8</u></b>	<b><u>151</u></b>									
621.wrf_s	128	72.9	182	<b><u>73.4</u></b>	<b><u>180</u></b>									
627.cam4_s	128	<b><u>37.9</u></b>	<b><u>234</u></b>	37.6	236									
628.pop2_s	128	146	81.3	<b><u>146</u></b>	<b><u>81.2</u></b>									
638.imagick_s	128	<b><u>30.8</u></b>	<b><u>468</u></b>	30.8	468									
644.nab_s	128	<b><u>28.7</u></b>	<b><u>609</u></b>	28.6	610									
649.fotonik3d_s	128	75.1	121	<b><u>75.1</u></b>	<b><u>121</u></b>									
654.roms_s	128	<b><u>35.4</u></b>	<b><u>445</u></b>	35.1	449									

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid D43K-1U**

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2021

**Software Availability:** Jan-2022

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-127"

LD\_LIBRARY\_PATH =

```
"/root/56882_1.12/speccpu2017_rate_aocc320_A1/amd_speed_aocc320_milanx_A
_lib/lib;/root/56882_1.12/speccpu2017_rate_aocc320_A1/amd_speed_aocc320_
milanx_A_lib/lib32:"
```

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "128"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Submitted: Tue Mar 1 02:50:38 EST 2022

Submission: cpu2017-20220301-31140.sub



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid D43K-1U**

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2021

**Software Availability:** Jan-2022

## Platform Notes

### BIOS Configuration

SMT Control set to Disable  
 NUMA nodes per socket set to NPS1  
 Pwr and Perf Profile set to Performance  
 Determinism Control is Manual  
 Determinism Slider set to Power  
 cTDP Control set to Manual  
 cTDP set to 280  
 Package Power Limit Control is Manual  
 IOMMU is Enable  
 EDC set to 300  
 EDC Platform Limit set to 300

Sysinfo program /root/56882\_1.12/speccpu2017\_rate\_aocc320\_A1/bin/sysinfo  
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
 running on quanta Fri Feb 25 06:40:33 2022

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```

model name : AMD EPYC 7773X 64-Core Processor
 2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63

```

### From lscpu from util-linux 2.34:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:          48 bits physical, 48 bits virtual
CPU(s):                128
On-line CPU(s) list:   0-127
Thread(s) per core:    1
Core(s) per socket:    64
Socket(s):              2
NUMA node(s):          2

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid D43K-1U**

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2021

**Software Availability:** Jan-2022

## Platform Notes (Continued)

```

Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7773X 64-Core Processor
Stepping: 2
Frequency boost: enabled
CPU MHz: 1795.560
CPU max MHz: 2200.0000
CPU min MHz: 1500.0000
BogoMIPS: 4391.78
Virtualization: AMD-V
L1d cache: 4 MiB
L1i cache: 4 MiB
L2 cache: 64 MiB
L3 cache: 1.5 GiB
NUMA node0 CPU(s): 0-63
NUMA node1 CPU(s): 64-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpelgb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf pni pclmulqdq monitor sse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_omsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL
L1d	32K	4M	8	Data	1
L1i	32K	4M	8	Instruction	1
L2	512K	64M	8	Unified	2

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid D43K-1U**

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2021

**Software Availability:** Jan-2022

## Platform Notes (Continued)

L3 96M 1.5G 16 Unified 3

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware
```

```
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

```
available: 2 nodes (0-1)
```

```
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63
```

```
node 0 size: 1019920 MB
```

```
node 0 free: 1017968 MB
```

```
node 1 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88
89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112
113 114 115 116 117 118 119 120 121 122 123 124 125 126 127
```

```
node 1 size: 1032129 MB
```

```
node 1 free: 1030739 MB
```

```
node distances:
```

```
node 0 1
0: 10 32
1: 32 10
```

```
From /proc/meminfo
```

```
MemTotal: 2101299112 kB
```

```
HugePages_Total: 0
```

```
Hugepagesize: 2048 kB
```

```
/sbin/tuned-adm active
```

```
Current active profile: throughput-performance
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
/usr/bin/lsb_release -d
```

```
Ubuntu 20.04 LTS
```

```
From /etc/*release* /etc/*version*
```

```
debian_version: bullseye/sid
```

```
os-release:
```

```
NAME="Ubuntu"
```

```
VERSION="20.04 LTS (Focal Fossa)"
```

```
ID=ubuntu
```

```
ID_LIKE=debian
```

```
PRETTY_NAME="Ubuntu 20.04 LTS"
```

```
VERSION_ID="20.04"
```

```
HOME_URL="https://www.ubuntu.com/"
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid D43K-1U**

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2021

**Software Availability:** Jan-2022

## Platform Notes (Continued)

SUPPORT\_URL="https://help.ubuntu.com/"

uname -a:

```
Linux quanta 5.4.0-96-generic #109-Ubuntu SMP Wed Jan 12 16:49:16 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 5 Feb 25 05:24

SPEC is set to: /root/56882\_1.12/speccpu2017\_rate\_aocc320\_A1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	407G	25G	362G	7%	/

From /sys/devices/virtual/dmi/id

Vendor:	Quanta Cloud Technology Inc.
Product:	QuantaGrid D43K-1U

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron Technology 72ASS16G72LZ-3G2B3	128 GB	4 rank	3200
16x Unknown Unknown			

BIOS:

BIOS Vendor:	American Megatrends International, LLC.
BIOS Version:	3C07.Q101
BIOS Date:	10/26/2021
BIOS Revision:	5.22

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid D43K-1U**

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2021

**Software Availability:** Jan-2022

## Platform Notes (Continued)

Firmware Revision: 6.31

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid D43K-1U**

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2021

**Software Availability:** Jan-2022

## Compiler Version Notes (Continued)

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid D43K-1U**

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2021

**Software Availability:** Jan-2022

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

### Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

### Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid D43K-1U**

(AMD EPYC 7773X, 2.2 GHz)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2021

**Software Availability:** Jan-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```

-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -fltto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang

```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

[http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v7\\_AMD\\_MILAN.html](http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v7_AMD_MILAN.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

[http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v7\\_AMD\\_MILAN.xml](http://www.spec.org/cpu2017/flags/Quanta-Computer-Inc-amd-speccpu-setting-v7_AMD_MILAN.xml)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

**Quanta Cloud Technology**

(Test Sponsor: Quanta Computer Inc.)

**QuantaGrid D43K-1U**

(AMD EPYC 7773X, 2.2 GHz)

**SPECspeed®2017\_fp\_base = 285**

**SPECspeed®2017\_fp\_peak = Not Run**

**CPU2017 License:** 9050

**Test Sponsor:** Quanta Computer Inc.

**Tested by:** Quanta Computer Inc.

**Test Date:** Feb-2022

**Hardware Availability:** Mar-2021

**Software Availability:** Jan-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-24 17:40:32-0500.

Report generated on 2022-03-21 13:22:36 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-21.