



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176


Test Sponsor: Supermicro

Tested by: Supermicro

Test Date: Aug-2022

Hardware Availability: Mar-2021

Software Availability: Aug-2022

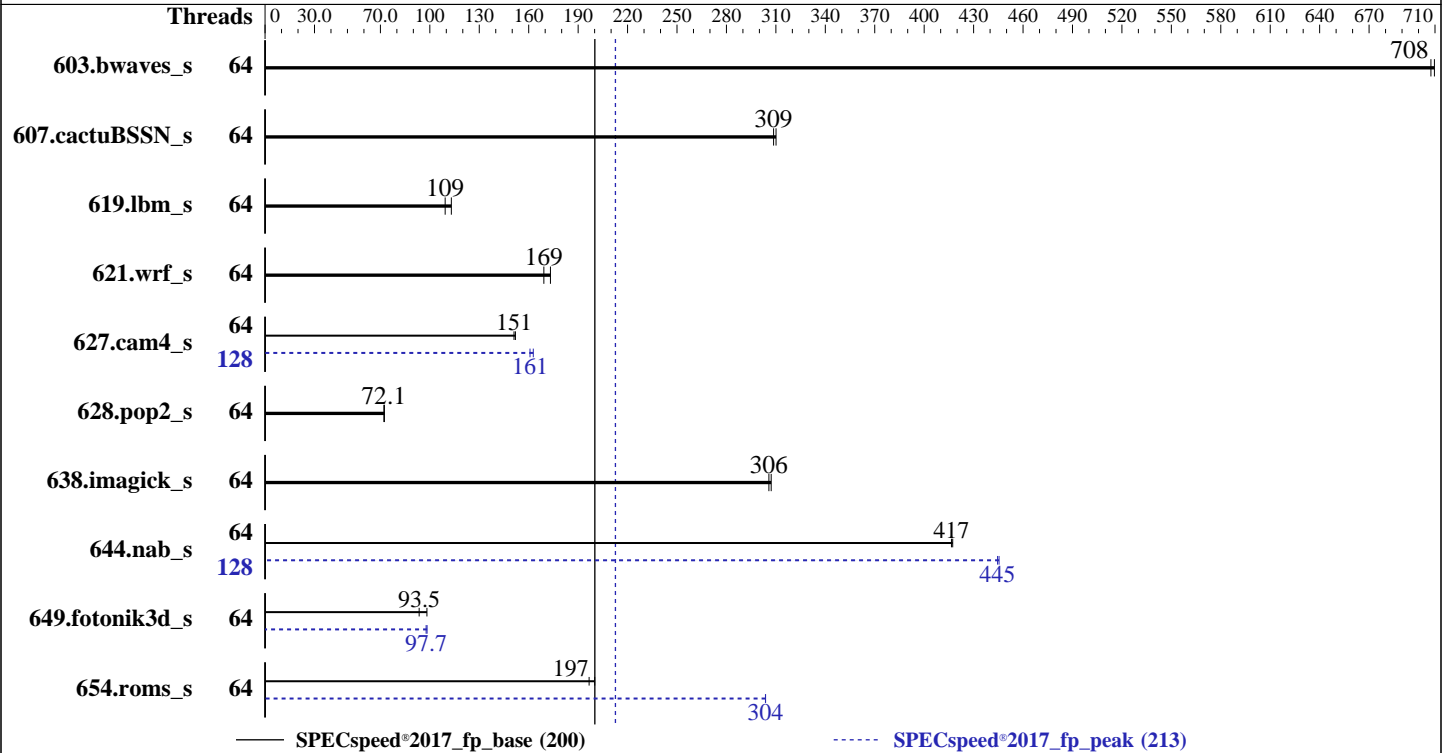

Hardware

CPU Name: AMD EPYC 7513
 Max MHz: 3650
 Nominal: 2600
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 200 GB SATA III SSD
 Other: None

Software

OS: Ubuntu 22.04.1 LTS
 Kernel 5.15.0-46-generic
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC
 Parallel: Yes
 Firmware: Version 2.4 released Apr-2022
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	83.1	710	<u>83.4</u>	<u>708</u>			64	83.1	710	<u>83.4</u>	<u>708</u>		
607.cactuBSSN_s	64	53.8	310	<u>54.0</u>	<u>309</u>			64	53.8	310	<u>54.0</u>	<u>309</u>		
619.lbm_s	64	46.3	113	<u>47.9</u>	<u>109</u>			64	46.3	113	<u>47.9</u>	<u>109</u>		
621.wrf_s	64	<u>78.2</u>	<u>169</u>	76.4	173			64	<u>78.2</u>	<u>169</u>	76.4	173		
627.cam4_s	64	58.3	152	<u>58.7</u>	<u>151</u>			128	54.4	163	<u>55.1</u>	<u>161</u>		
628.pop2_s	64	164	72.4	<u>165</u>	<u>72.1</u>			64	164	72.4	<u>165</u>	<u>72.1</u>		
638.imagick_s	64	<u>47.2</u>	<u>306</u>	47.0	307			64	<u>47.2</u>	<u>306</u>	47.0	307		
644.nab_s	64	41.9	417	<u>41.9</u>	<u>417</u>			128	<u>39.3</u>	<u>445</u>	39.2	445		
649.fotonik3d_s	64	92.8	98.2	<u>97.5</u>	<u>93.5</u>			64	<u>93.3</u>	<u>97.7</u>	92.7	98.3		
654.roms_s	64	78.7	200	<u>80.1</u>	<u>197</u>			64	51.8	304	<u>51.8</u>	<u>304</u>		

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.  
To enable THP only on request for peak runs of 628.pop2_s:  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.  
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,  
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
"/home/cpu2017/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_spee
d_aocc320_milanx_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-127"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-63"
PGHPPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-63"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

General Notes (Continued)

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Settings:

Determinism Control = Manual
Determinism Slider = Power
cTDP Control = Manual
cTDP = 200
Package Power Limit Control = Manual
Package Power Limit = 200
APBDIS = 1
NUMA Nodes Per Socket = NPS4

sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on hl2dsu-7513 Sat Aug 13 03:11:08 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7513 32-Core Processor
 2 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 48 bits physical, 48 bits virtual
Byte Order: Little Endian
CPU(s): 128
On-line CPU(s) list: 0-127
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Platform Notes (Continued)

```

Vendor ID: AuthenticAMD
Model name: AMD EPYC 7513 32-Core Processor
CPU family: 25
Model: 1
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU max MHz: 3681.6399
CPU min MHz: 1500.0000
BogoMIPS: 5199.85
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt
aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap
clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes
vpclmulqdq rdpid overflow_recov succor smca
Virtualization: AMD-V
L1d cache: 2 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 32 MiB (64 instances)
L3 cache: 256 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-7,64-71
NUMA node1 CPU(s): 8-15,72-79
NUMA node2 CPU(s): 16-23,80-87
NUMA node3 CPU(s): 24-31,88-95
NUMA node4 CPU(s): 32-39,96-103
NUMA node5 CPU(s): 40-47,104-111
NUMA node6 CPU(s): 48-55,112-119
NUMA node7 CPU(s): 56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Platform Notes (Continued)

Vulnerability Spectre v1: Mitigation; usercopy/swaggs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	512K	32M	8	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71

node 0 size: 128824 MB

node 0 free: 128019 MB

node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79

node 1 size: 129019 MB

node 1 free: 128195 MB

node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87

node 2 size: 128984 MB

node 2 free: 128187 MB

node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95

node 3 size: 129007 MB

node 3 free: 128424 MB

node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103

node 4 size: 129019 MB

node 4 free: 128560 MB

node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111

node 5 size: 129019 MB

node 5 free: 128544 MB

node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119

node 6 size: 129019 MB

node 6 free: 128500 MB

node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127

node 7 size: 129014 MB

node 7 free: 128495 MB

node distances:

node 0 1 2 3 4 5 6 7
0: 10 12 12 12 32 32 32 32

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Platform Notes (Continued)

1:	12	10	12	12	32	32	32	32
2:	12	12	10	12	32	32	32	32
3:	12	12	12	10	32	32	32	32
4:	32	32	32	32	10	12	12	12
5:	32	32	32	32	12	10	12	12
6:	32	32	32	32	12	12	10	12
7:	32	32	32	32	12	12	12	10

From /proc/meminfo

MemTotal: 1056674572 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/sbin/tuned-adm active
Current active profile: balanced

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

/usr/bin/lsb_release -d
Ubuntu 22.04.1 LTS

From /etc/*release* /etc/*version*

debian_version: bookworm/sid
os-release:
PRETTY_NAME="Ubuntu 22.04.1 LTS"
NAME="Ubuntu"
VERSION_ID="22.04"
VERSION="22.04.1 LTS (Jammy Jellyfish)"
VERSION_CODENAME=jammy
ID=ubuntu
ID_LIKE=debian
HOME_URL="https://www.ubuntu.com/"

uname -a:
Linux h12dsu-7513 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): Bypass disabled via prctl and seccomp
Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Aug 12 09:21

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	182G	20G	153G	12%	/

```
From /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Serial: 0123456789
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

- 16x NO DIMM Unknown
- 16x SK Hynix HMAA8GR7AJR4N-XN 64 GB 2 rank 3200

BIOS:

- BIOS Vendor: American Megatrends Inc.
- BIOS Version: 2.4
- BIOS Date: 04/19/2022
- BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
-----
```

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on LLVM Mirror.Version.13.0.0)

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: basepeak = yes

638.imagick_s: basepeak = yes

```
644.nab_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

603.bwaves_s: basepeak = yes

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

```
654.roms_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Peak Optimization Flags (Continued)

654.roms_s (continued):

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

621.wrf_s: basepeak = yes

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

628.pop2_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Supermicro

A+ Server 2124US-TNRP
(H12DSU-iN , AMD EPYC 7513)

SPECspeed®2017_fp_base = 200

SPECspeed®2017_fp_peak = 213

CPU2017 License: 0001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2022
Hardware Availability: Mar-2021
Software Availability: Aug-2022

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Milan-revG.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-08-12 23:11:07-0400.
Report generated on 2022-08-31 20:08:55 by CPU2017 PDF formatter v6442.
Originally published on 2022-08-30.