



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11


(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jan-2023  
Hardware Availability: Dec-2022  
Software Availability: Nov-2022

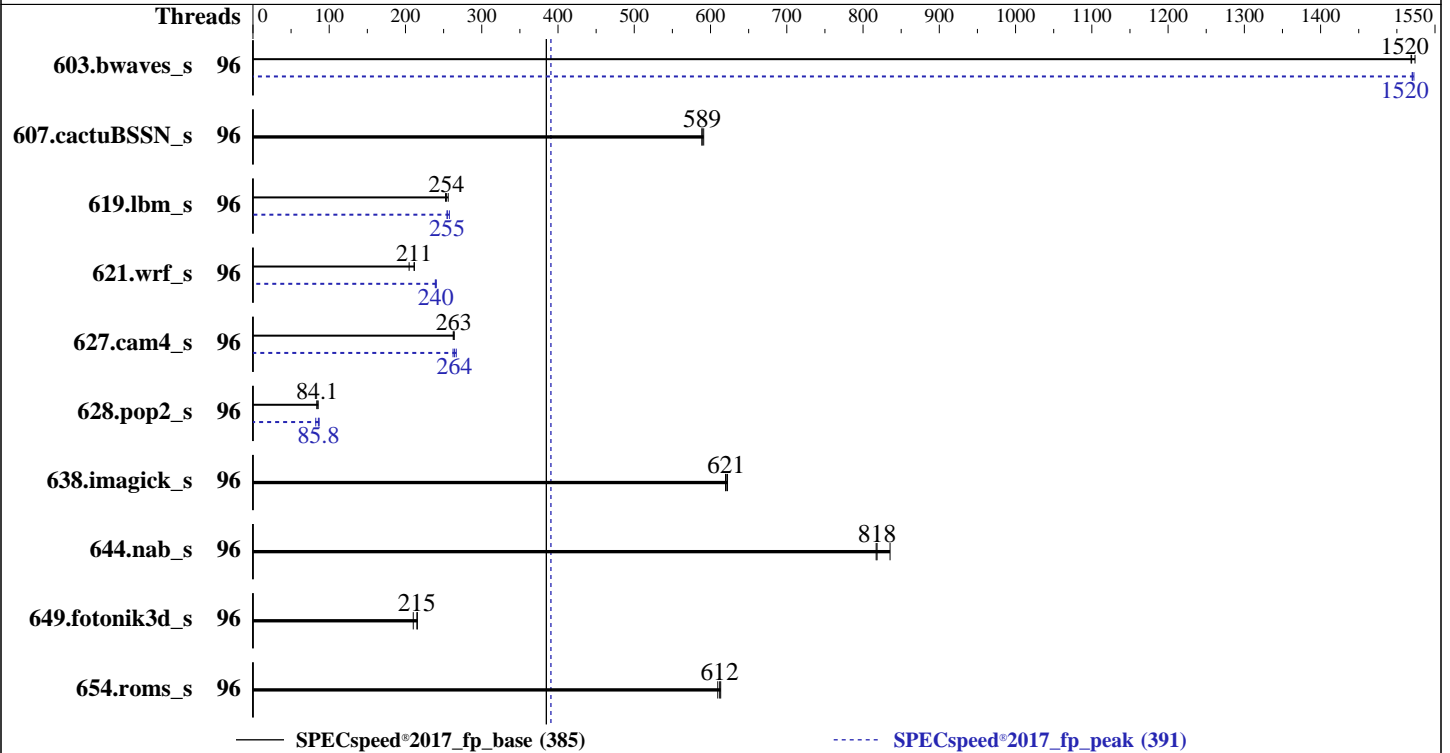

## Hardware

CPU Name: AMD EPYC 9474F  
Max MHz: 4100  
Nominal: 3600  
Enabled: 96 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 256 MB I+D on chip per chip,  
32 MB shared / 6 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 1 x 480 GB SATA SSD  
Other: None

## Software

OS: Ubuntu 22.04.1 LTS  
Kernel 5.15.0-50-generic  
Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
Parallel: Yes  
Firmware: HPE BIOS Version v1.12 11/24/2022 released  
Nov-2022  
File System: ext4  
System State: Run level 5 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: None  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jan-2023  
Hardware Availability: Dec-2022  
Software Availability: Nov-2022

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	38.7	1520	38.8	1520	<b><u>38.8</u></b>	<b><u>1520</u></b>	96	<b><u>38.8</u></b>	<b><u>1520</u></b>	38.8	1520	38.8	1520
607.cactuBSSN_s	96	<b><u>28.3</u></b>	<b><u>589</u></b>	28.3	589	28.2	591	96	<b><u>28.3</u></b>	<b><u>589</u></b>	28.3	589	28.2	591
619.lbm_s	96	<b><u>20.7</u></b>	<b><u>254</u></b>	20.7	253	20.5	256	96	20.3	258	20.6	255	<b><u>20.6</u></b>	<b><u>255</u></b>
621.wrf_s	96	64.6	205	<b><u>62.6</u></b>	<b><u>211</u></b>	62.5	212	96	55.3	239	<b><u>55.2</u></b>	<b><u>240</u></b>	55.0	240
627.cam4_s	96	<b><u>33.7</u></b>	<b><u>263</u></b>	33.6	264	33.8	263	96	33.8	262	33.2	267	<b><u>33.5</u></b>	<b><u>264</u></b>
628.pop2_s	96	139	85.5	<b><u>141</u></b>	<b><u>84.1</u></b>	142	83.8	96	137	86.8	144	82.4	<b><u>138</u></b>	<b><u>85.8</u></b>
638.imagick_s	96	23.2	622	<b><u>23.2</u></b>	<b><u>621</u></b>	23.3	620	96	23.2	622	<b><u>23.2</u></b>	<b><u>621</u></b>	23.3	620
644.nab_s	96	20.9	835	21.4	817	<b><u>21.3</u></b>	<b><u>818</u></b>	96	20.9	835	21.4	817	<b><u>21.3</u></b>	<b><u>818</u></b>
649.fotonik3d_s	96	43.4	210	42.3	216	<b><u>42.4</u></b>	<b><u>215</u></b>	96	43.4	210	42.3	216	<b><u>42.4</u></b>	<b><u>215</u></b>
654.roms_s	96	25.7	613	<b><u>25.7</u></b>	<b><u>612</u></b>	25.8	609	96	25.7	613	<b><u>25.7</u></b>	<b><u>612</u></b>	25.8	609

SPECspeed®2017\_fp\_base = **385**

SPECspeed®2017\_fp\_peak = **391**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

To always enable THP for peak runs of:

```
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
```

```
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

To disable THP for peak runs of 621.wrf\_s:

```
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

To enable THP only on request for peak runs of 654.roms\_s:

```
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-95"
```

```
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_genoa_B_lib/lib:"
```

```
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
```

```
MALLOC_CONF = "oversize_threshold:0,retain:true"
```

```
OMP_DYNAMIC = "false"
```

```
OMP_SCHEDULE = "static"
```

```
OMP_STACKSIZE = "128M"
```

```
OMP_THREAD_LIMIT = "96"
```

Environment variables set by runcpu during the 603.bwaves\_s peak run:

```
GOMP_CPU_AFFINITY = "0-95"
```

Environment variables set by runcpu during the 619.lbm\_s peak run:

```
GOMP_CPU_AFFINITY = "0-95"
```

Environment variables set by runcpu during the 621.wrf\_s peak run:

```
GOMP_CPU_AFFINITY = "0-95"
```

Environment variables set by runcpu during the 627.cam4\_s peak run:

```
GOMP_CPU_AFFINITY = "0-95"
```

Environment variables set by runcpu during the 628.pop2\_s peak run:

```
GOMP_CPU_AFFINITY = "0-95"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD SMT Option set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

Memory PStates set to Disabled

Thermal Configuration set to Maximum Cooling

The system ROM used for this result contains microcode version 0xa10110e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoaPI 1.0.0.1-L6

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on admin1 Tue Jun 28 00:38:24 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 9474F 48-Core Processor

2 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 48

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

32 33 34 35 36 37 40 41 42 43 44 45 48 49 50 51 52 53 56 57 58 59 60 61

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

32 33 34 35 36 37 40 41 42 43 44 45 48 49 50 51 52 53 56 57 58 59 60 61

From lscpu from util-linux 2.37.2:

Architecture: x86\_64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Dec-2022  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

```

CPU op-mode(s):          32-bit, 64-bit
Address sizes:           52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                  96
On-line CPU(s) list:    0-95
Vendor ID:                AuthenticAMD
Model name:              AMD EPYC 9474F 48-Core Processor
CPU family:              25
Model:                    17
Thread(s) per core:     1
Core(s) per socket:     48
Socket(s):                2
Stepping:                 1
Frequency boost:        enabled
CPU max MHz:             4114.0000
CPU min MHz:            400.0000
BogoMIPS:                7188.96
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat
npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq
la57 rdpid overflow_recov succor smca fsrm flush_lld
Virtualization:          AMD-V
L1d cache:               3 MiB (96 instances)
L1i cache:               3 MiB (96 instances)
L2 cache:                96 MiB (96 instances)
L3 cache:                512 MiB (16 instances)
NUMA node(s):           16
NUMA node0 CPU(s):      0-5
NUMA node1 CPU(s):      24-29
NUMA node2 CPU(s):      12-17
NUMA node3 CPU(s):      36-41
NUMA node4 CPU(s):      18-23
NUMA node5 CPU(s):      42-47
NUMA node6 CPU(s):      6-11
NUMA node7 CPU(s):      30-35
NUMA node8 CPU(s):      48-53

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

```

NUMA node9 CPU(s):          72-77
NUMA node10 CPU(s):         60-65
NUMA node11 CPU(s):         84-89
NUMA node12 CPU(s):         66-71
NUMA node13 CPU(s):         90-95
NUMA node14 CPU(s):         54-59
NUMA node15 CPU(s):         78-83
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	3M	8	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	1M	96M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 96456 MB
node 0 free: 96251 MB
node 1 cpus: 24 25 26 27 28 29
node 1 size: 96766 MB
node 1 free: 96545 MB
node 2 cpus: 12 13 14 15 16 17
node 2 size: 96766 MB
node 2 free: 96584 MB
node 3 cpus: 36 37 38 39 40 41
node 3 size: 96766 MB
node 3 free: 96612 MB

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL365 Gen11**

(3.60 GHz, AMD EPYC 9474F)

**SPECspeed®2017\_fp\_base = 385**

**SPECspeed®2017\_fp\_peak = 391**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Platform Notes (Continued)

```

node 4 cpus: 18 19 20 21 22 23
node 4 size: 96730 MB
node 4 free: 96551 MB
node 5 cpus: 42 43 44 45 46 47
node 5 size: 96766 MB
node 5 free: 96578 MB
node 6 cpus: 6 7 8 9 10 11
node 6 size: 96766 MB
node 6 free: 96537 MB
node 7 cpus: 30 31 32 33 34 35
node 7 size: 96766 MB
node 7 free: 96643 MB
node 8 cpus: 48 49 50 51 52 53
node 8 size: 96766 MB
node 8 free: 96669 MB
node 9 cpus: 72 73 74 75 76 77
node 9 size: 96766 MB
node 9 free: 96667 MB
node 10 cpus: 60 61 62 63 64 65
node 10 size: 96766 MB
node 10 free: 96673 MB
node 11 cpus: 84 85 86 87 88 89
node 11 size: 96766 MB
node 11 free: 96659 MB
node 12 cpus: 66 67 68 69 70 71
node 12 size: 96766 MB
node 12 free: 96666 MB
node 13 cpus: 90 91 92 93 94 95
node 13 size: 96716 MB
node 13 free: 96622 MB
node 14 cpus: 54 55 56 57 58 59
node 14 size: 96766 MB
node 14 free: 96670 MB
node 15 cpus: 78 79 80 81 82 83
node 15 size: 96766 MB
node 15 free: 96666 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
  0: 10 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32
  1: 11 10 11 11 11 11 11 11 11 32 32 32 32 32 32 32
  2: 11 11 10 11 11 11 11 11 11 32 32 32 32 32 32 32
  3: 11 11 11 10 11 11 11 11 11 32 32 32 32 32 32 32
  4: 11 11 11 11 10 11 11 11 11 32 32 32 32 32 32 32
  5: 11 11 11 11 11 10 11 11 11 32 32 32 32 32 32 32
  6: 11 11 11 11 11 11 10 11 11 32 32 32 32 32 32 32
  7: 11 11 11 11 11 11 11 10 32 32 32 32 32 32 32 32
  8: 32 32 32 32 32 32 32 32 10 11 11 11 11 11 11 11

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Dec-2022  
**Software Availability:** Nov-2022

## Platform Notes (Continued)

9:	32	32	32	32	32	32	32	32	32	11	10	11	11	11	11	11	11
10:	32	32	32	32	32	32	32	32	32	11	11	10	11	11	11	11	11
11:	32	32	32	32	32	32	32	32	32	11	11	11	10	11	11	11	11
12:	32	32	32	32	32	32	32	32	32	11	11	11	11	10	11	11	11
13:	32	32	32	32	32	32	32	32	32	11	11	11	11	11	10	11	11
14:	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	10	11
15:	32	32	32	32	32	32	32	32	32	11	11	11	11	11	11	11	10

From /proc/meminfo

MemTotal: 1585015520 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: balanced

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

/usr/bin/lsb\_release -d

Ubuntu 22.04.1 LTS

From /etc/\*release\* /etc/\*version\*

debian\_version: bookworm/sid  
os-release:  
PRETTY\_NAME="Ubuntu 22.04.1 LTS"  
NAME="Ubuntu"  
VERSION\_ID="22.04"  
VERSION="22.04.1 LTS (Jammy Jellyfish)"  
VERSION\_CODENAME=jammy  
ID=ubuntu  
ID\_LIKE=debian  
HOME\_URL="https://www.ubuntu.com/"

uname -a:

Linux admin1 5.15.0-50-generic #56-Ubuntu SMP Tue Sep 20 13:23:26 UTC 2022 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
mmio_stale_data:	Not affected
retbleed:	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): Bypass disabled via prctl and seccomp  
Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Retpolines, IBPB: conditional, IBRS\_FW, STIBP: disabled, RSB filling, PBRSE-eIBRS: Not affected

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Jun 28 00:00

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	437G	20G	399G	5%	/

```
From /sys/devices/virtual/dmi/id
Vendor:          HPE
Product:         ProLiant DL365 Gen11
Product Family: ProLiant
Serial:          DL365G11-001
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
24x Hynix HMC94AEBRA103N 64 GB 2 rank 4800

```
BIOS:
  BIOS Vendor:      HPE
  BIOS Version:     1.12
  BIOS Date:        11/24/2022
  BIOS Revision:    1.12
  Firmware Revision: 1.10
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Dec-2022  
**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4

-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7

-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Dec-2022  
**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2023

Hardware Availability: Dec-2022

Software Availability: Nov-2022

## Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2023  
**Hardware Availability:** Dec-2022  
**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP  
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math  
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3  
-fvector-transform -fscalar-transform -fopenmp=libomp  
-lomp -lamdlibm -lamdalloc -lflang

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

627.cam4\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

628.pop2\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL365 Gen11

(3.60 GHz, AMD EPYC 9474F)

SPECspeed®2017\_fp\_base = 385

SPECspeed®2017\_fp\_peak = 391

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2023

**Hardware Availability:** Dec-2022

**Software Availability:** Nov-2022

## Peak Optimization Flags (Continued)

628.pop2\_s (continued):

```
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-06-27 15:08:23-0400.

Report generated on 2023-02-15 10:36:33 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-14.