



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_base = 165

SPECspeed®2017\_fp\_peak = 171

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

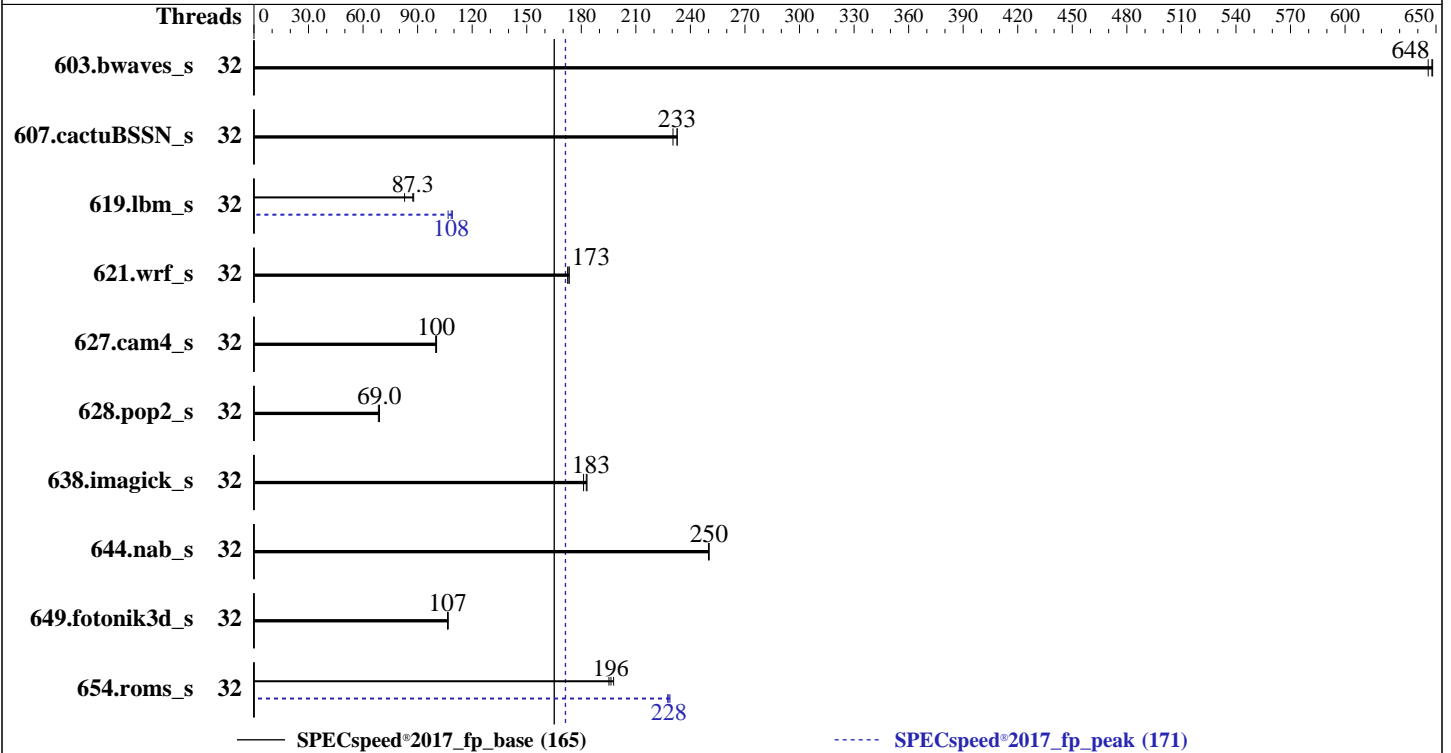

### Hardware

CPU Name: AMD EPYC 7303  
 Max MHz: 3400  
 Nominal: 2400  
 Enabled: 32 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip,  
 16 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5 (x86\_64)  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version D8E131D 3.10 released Jun-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECSpeed®2017\_fp\_base = 165

SPECSpeed®2017\_fp\_peak = 171

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jul-2023  
Hardware Availability: Oct-2023  
Software Availability: Jun-2023

## Results Table

| Benchmark       | Base    |                    |                    |                    |                   |                    |                    | Peak    |                    |                    |                    |                   |                    |                   |
|-----------------|---------|--------------------|--------------------|--------------------|-------------------|--------------------|--------------------|---------|--------------------|--------------------|--------------------|-------------------|--------------------|-------------------|
|                 | Threads | Seconds            | Ratio              | Seconds            | Ratio             | Seconds            | Ratio              | Threads | Seconds            | Ratio              | Seconds            | Ratio             | Seconds            | Ratio             |
| 603.bwaves_s    | 32      | 91.0               | 648                | <b><u>91.1</u></b> | <b><u>648</u></b> | 91.4               | 646                | 32      | 91.0               | 648                | <b><u>91.1</u></b> | <b><u>648</u></b> | 91.4               | 646               |
| 607.cactuBSSN_s | 32      | 71.6               | 233                | <b><u>71.6</u></b> | <b><u>233</u></b> | 72.3               | 230                | 32      | 71.6               | 233                | <b><u>71.6</u></b> | <b><u>233</u></b> | 72.3               | 230               |
| 619.lbm_s       | 32      | 59.6               | 87.8               | 63.2               | 82.8              | <b><u>60.0</u></b> | <b><u>87.3</u></b> | 32      | <b><u>48.3</u></b> | <b><u>108</u></b>  | 49.1               | 107               | 48.0               | 109               |
| 621.wrf_s       | 32      | <b><u>76.3</u></b> | <b><u>173</u></b>  | 76.3               | 173               | 76.7               | 172                | 32      | <b><u>76.3</u></b> | <b><u>173</u></b>  | 76.3               | 173               | 76.7               | 172               |
| 627.cam4_s      | 32      | <b><u>88.5</u></b> | <b><u>100</u></b>  | 88.7               | 100               | 88.3               | 100                | 32      | <b><u>88.5</u></b> | <b><u>100</u></b>  | 88.7               | 100               | 88.3               | 100               |
| 628.pop2_s      | 32      | <b><u>172</u></b>  | <b><u>69.0</u></b> | 174                | 68.4              | 172                | 69.0               | 32      | <b><u>172</u></b>  | <b><u>69.0</u></b> | 174                | 68.4              | 172                | 69.0              |
| 638.imagick_s   | 32      | 79.6               | 181                | <b><u>78.9</u></b> | <b><u>183</u></b> | 78.8               | 183                | 32      | 79.6               | 181                | <b><u>78.9</u></b> | <b><u>183</u></b> | 78.8               | 183               |
| 644.nab_s       | 32      | 69.8               | 250                | <b><u>69.8</u></b> | <b><u>250</u></b> | 69.9               | 250                | 32      | 69.8               | 250                | <b><u>69.8</u></b> | <b><u>250</u></b> | 69.9               | 250               |
| 649.fotonik3d_s | 32      | 85.6               | 106                | <b><u>85.6</u></b> | <b><u>107</u></b> | 85.3               | 107                | 32      | 85.6               | 106                | <b><u>85.6</u></b> | <b><u>107</u></b> | 85.3               | 107               |
| 654.roms_s      | 32      | 79.6               | 198                | 80.7               | 195               | <b><u>80.2</u></b> | <b><u>196</u></b>  | 32      | 69.2               | 227                | 68.8               | 229               | <b><u>69.0</u></b> | <b><u>228</u></b> |

SPECSpeed®2017\_fp\_base = **165**

SPECSpeed®2017\_fp\_peak = **171**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.  
To enable THP only on request for peak runs of 628.pop2\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To disable THP for peak runs of 627.cam4\_s, 649.fotonik3d\_s, and 654.roms\_s,  
'echo never > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_base = 165

SPECspeed®2017\_fp\_peak = 171

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2023  
**Hardware Availability:** Oct-2023  
**Software Availability:** Jun-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-31"
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-milanx-aocc320-A1/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017-1.1.9-amd-
milanx-aocc320-A1/amd_speed_aocc320_milanx_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "32"
```

Environment variables set by runcpu during the 619.lbm\_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

Environment variables set by runcpu during the 654.roms\_s peak run:

```
GOMP_CPU_AFFINITY = "0-31"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using opensUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS configuration:  
Operating Mode set to Maximum Performance and then set it to Custom Mode  
SMT Mode set to Disabled  
DLWM Support set to Disabled

```
Sysinfo program /home/cpu2017-1.1.9-amd-milanx-aocc320-A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Feb 28 20:18:42 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 165

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_peak = 171

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2023

**Hardware Availability:** Oct-2023

**Software Availability:** Jun-2023

### Platform Notes (Continued)

```

8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

-----
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

```

```

-----
2. w
20:18:42 up 18 min,  1 user,  load average: 0.00, 0.00, 0.00
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1    -                20:01   15.00s  1.26s  0.05s /bin/bash ./amd_speed_aocc320_milanx_A1.sh

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4127374
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4127374
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 34
login -- root
-bash
/bin/bash ./run_SR645_milanx.sh
/bin/bash ./Run036-compliant-amd-speedfp.sh
python3 ./run_amd_speed_aocc320_milanx_A1.py
/bin/bash ./amd_speed_aocc320_milanx_A1.sh

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 165

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_peak = 171

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

### Platform Notes (Continued)

```

runcpu --config amd_speed_aocc320_milanx_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc320_milanx_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.032/templogs/preenv.fpspeed.032.0.log --lognum 032.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-milanx-aocc320-A1

```

#### 6. /proc/cpuinfo

```

model name      : AMD EPYC 7303 16-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 1
stepping       : 1
microcode      : 0xa0011ce
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 2560 4K pages
cpu cores      : 16
siblings       : 16
2 physical ids (chips)
32 processors (hardware threads)
physical id 0: core ids 0-15
physical id 1: core ids 0-15
physical id 0: apicids 0-15
physical id 1: apicids 16-31

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          48 bits physical, 48 bits virtual
Byte Order:             Little Endian
CPU(s):                 32
On-line CPU(s) list:   0-31
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 7303 16-Core Processor
CPU family:            25
Model:                  1
Thread(s) per core:    1
Core(s) per socket:    16
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU max MHz:           3435.9370
CPU min MHz:           1500.0000
BogoMIPS:               4790.98
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes
                        xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
                        misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core
                        perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single
                        hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
                        erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_base = 165

SPECspeed®2017\_fp\_peak = 171

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2023  
**Hardware Availability:** Oct-2023  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

```
clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin brs arat npt lbrv
svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold v_vmsave_vmload vgif v_spec_ctrl umip pku ospke
vaes vpclmulqdq rdpid overflow_recov succor smca fsrm
```

```
Virtualization: AMD-V
L1d cache: 1 MiB (32 instances)
L1i cache: 1 MiB (32 instances)
L2 cache: 16 MiB (32 instances)
L3 cache: 128 MiB (8 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-15
NUMA node1 CPU(s): 16-31
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 32K      | 1M       | 8    | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 1M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 512K     | 16M      | 8    | Unified     | 2     | 1024  | 1        | 64             |
| L3   | 16M      | 128M     | 16   | Unified     | 3     | 16384 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-15
node 0 size: 515793 MB
node 0 free: 515103 MB
node 1 cpus: 16-31
node 1 size: 516079 MB
node 1 free: 515259 MB
node distances:
node  0  1
 0:  10  32
 1:  32  10
```

9. /proc/meminfo

MemTotal: 1056638520 kB

10. who -r

run-level 3 Feb 28 20:00

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```
Default Target Status
multi-user      running
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_base = 165

SPECspeed®2017\_fp\_peak = 171

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2023  
**Hardware Availability:** Oct-2023  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

```
-----
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
                kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
                systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime  systemd-remount-fs
disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                firewallld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
                kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
                serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                systemd-network-generator systemd-sysexit systemd-time-wait-sync systemd-timesyncd

indirect        wickedd
-----
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=59deb039-e3ef-428e-922f-f701bb617ac1
splash=silent
mitigations=auto
quiet
security=apparmor
-----
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.40 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
-----
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
-----
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag      always defer defer+madvice [madvice] never
enabled     always [madvice] never
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_base = 165

SPECspeed®2017\_fp\_peak = 171

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2023  
**Hardware Availability:** Oct-2023  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5

-----  
19. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-amd-milanx-aocc320-A1  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 xfs 893G 25G 868G 3% /

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: Lenovo  
Product: ThinkSystem SR645 MB  
Product Family: ThinkSystem  
Serial: 1234567890

-----  
21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Lenovo  
BIOS Version: D8E131D-3.10  
BIOS Date: 06/27/2023  
BIOS Revision: 3.10  
Firmware Revision: 5.0

### Compiler Version Notes

-----  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
-----

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_base = 165

SPECspeed®2017\_fp\_peak = 171

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2023  
**Hardware Availability:** Oct-2023  
**Software Availability:** Jun-2023

### Compiler Version Notes (Continued)

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

### Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_fp\_base = 165

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_peak = 171

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

### Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_base = 165

SPECspeed®2017\_fp\_peak = 171

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-fininline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_fp\_base = 165

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_peak = 171

CPU2017 License: 9017

Test Date: Jul-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Oct-2023

Tested by: Lenovo Global Technology

Software Availability: Jun-2023

## Base Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

638.imagick\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_base = 165

SPECspeed®2017\_fp\_peak = 171

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2023

Hardware Availability: Oct-2023

Software Availability: Jun-2023

## Peak Optimization Flags (Continued)

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp  
-Mrecursive -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp  
-DSPEC\_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645  
(2.40 GHz,AMD EPYC 7303)

SPECspeed®2017\_fp\_base = 165

SPECspeed®2017\_fp\_peak = 171

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jul-2023

**Hardware Availability:** Oct-2023

**Software Availability:** Jun-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-S.html>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-S.xml>

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-28 07:18:41-0500.

Report generated on 2023-08-16 14:18:26 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-15.