



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jun-2023

Software Availability: Jan-2024

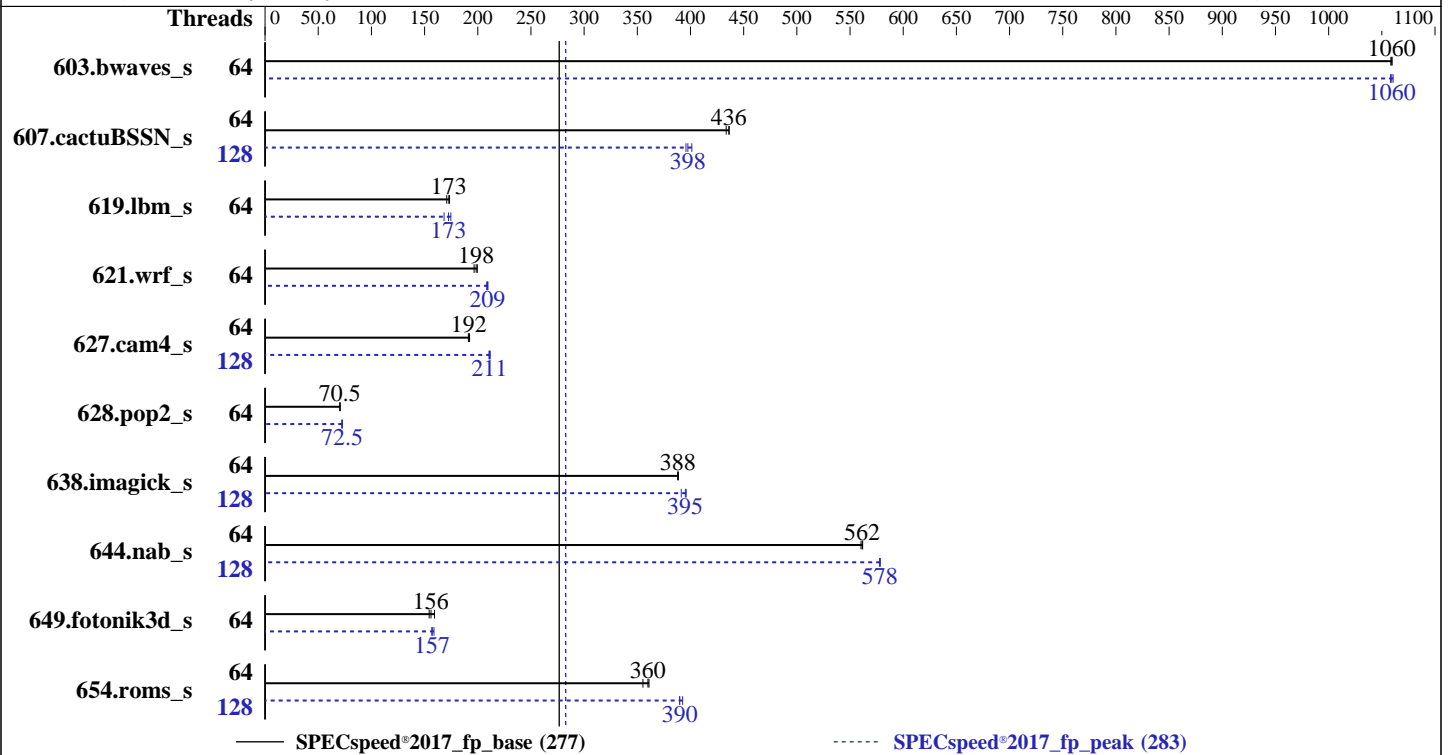

Hardware

CPU Name: AMD EPYC 9334
 Max MHz: 3900
 Nominal: 2700
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 1 TB NVMe
 Other: None

Software

OS: Ubuntu 20.04.4 LTS
 kernel version 5.15.0-92-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.6 released Nov-2023
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECSpeed®2017_fp_base = 277
SPECSpeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	55.7	1060	55.7	1060	<u>55.7</u>	<u>1060</u>	64	<u>55.7</u>	<u>1060</u>	55.8	1060	55.6	1060
607.cactuBSSN_s	64	<u>38.2</u>	<u>436</u>	38.4	434	38.2	436	128	41.5	401	42.1	396	<u>41.9</u>	<u>398</u>
619.lbm_s	64	<u>30.3</u>	<u>173</u>	30.7	171	30.2	173	64	30.0	175	31.1	168	<u>30.4</u>	<u>173</u>
621.wrf_s	64	66.3	200	<u>66.6</u>	<u>198</u>	67.3	197	64	<u>63.3</u>	<u>209</u>	63.1	210	63.5	208
627.cam4_s	64	46.4	191	<u>46.2</u>	<u>192</u>	46.1	192	128	42.1	211	<u>42.0</u>	<u>211</u>	41.9	212
628.pop2_s	64	168	70.5	169	70.3	<u>169</u>	<u>70.5</u>	64	<u>164</u>	<u>72.5</u>	164	72.6	165	72.2
638.imagick_s	64	<u>37.2</u>	<u>388</u>	37.1	389	37.2	388	128	36.4	396	36.9	391	<u>36.5</u>	<u>395</u>
644.nab_s	64	31.2	560	31.1	562	<u>31.1</u>	<u>562</u>	128	<u>30.2</u>	<u>578</u>	30.2	578	30.2	578
649.fotonik3d_s	64	<u>58.4</u>	<u>156</u>	59.1	154	57.2	159	64	58.1	157	<u>58.0</u>	<u>157</u>	57.4	159
654.roms_s	64	<u>43.7</u>	<u>360</u>	44.3	355	43.6	361	128	40.1	393	<u>40.4</u>	<u>390</u>	40.4	390

SPECSpeed®2017_fp_base = 277

SPECSpeed®2017_fp_peak = 283

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
```

Environment variables set by runcpu during the 619.lbm_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 621.wrf_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 627.cam4_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
```

Environment variables set by runcpu during the 628.pop2_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
```

Environment variables set by runcpu during the 638.imagick_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
```

Environment variables set by runcpu during the 644.nab_s peak run:

```
GOMP_CPU_AFFINITY = "0-127"
```

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

```
GOMP_CPU_AFFINITY = "0-63"
PGHPF_ZMEM = "yes"
```

Environment variables set by runcpu during the 654.roms_s peak run:

```
GOMP_CPU_AFFINITY = "0 64 1 65 2 66 3 67 4 68 5 69 6 70 7 71 8 72 9 73 10 74 11 75 12 76 13 77 14 78 15 79
16 80 17 81 18 82 19 83 20 84 21 85 22 86 23 87 24 88 25 89 26 90 27 91 28 92 29 93 30 94 31 95 32 96
33 97 34 98 35 99 36 100 37 101 38 102 39 103 40 104 41 105 42 106 43 107 44 108 45 109 46 110 47 111
48 112 49 113 50 114 51 115 52 116 53 117 54 118 55 119 56 120 57 121 58 122 59 123 60 124 61 125 62
126 63 127"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Platform Notes

BIOS Settings:
NUMA Nodes Per Socket = NPS4
Determinism Control = Manual
Determinism Enable = Disable Performance Determinism
cTDP Control = Manual
cTDP = 240
Package Power Limit Control = Manual
Package Power Limit = 240

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd2-Super-Server Wed Jan 31 16:04:39 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

1. uname -a
Linux amd2-Super-Server 5.15.0-92-generic #102~20.04.1-Ubuntu SMP Mon Jan 15 13:09:14 UTC 2024 x86_64
x86_64 x86_64 GNU/Linux

```

```

2. w
16:04:39 up 23:57,  1 user,  load average: 6.08, 6.17, 3.71
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU WHAT
amd2      tty1    -                Tue16    3:15m  1.78s  0.02s -bash

```

```

3. Username
From environment variable $USER:  amd2

```

```

4. ulimit -a
time(seconds)          unlimited

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Platform Notes (Continued)

file(blocks)	unlimited
data(kbytes)	unlimited
stack(kbytes)	unlimited
coredump(blocks)	0
memory(kbytes)	unlimited
locked memory(kbytes)	2097152
process	4126728
nofiles	1024
vmemory(kbytes)	unlimited
locks	unlimited
rtprio	0

```
-----
5. sysinfo process ancestry
/sbin/init splash
/bin/login -p --
-bash
su
bash
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9334 32-Core Processor
vendor_id      : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa10113e
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
TLB size       : 3584 4K pages
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-31
physical id 1:  core ids 0-31
physical id 0:  apicids 0-63
physical id 1:  apicids 64-127
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----
7. lscpu

From lscpu from util-linux 2.34:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          52 bits physical, 57 bits virtual
CPU(s):                 128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Platform Notes (Continued)

```

Core(s) per socket:          32
Socket(s):                  2
NUMA node(s):              2
Vendor ID:                  AuthenticAMD
CPU family:                 25
Model:                      17
Model name:                 AMD EPYC 9334 32-Core Processor
Stepping:                   1
Frequency boost:            enabled
CPU MHz:                    1500.000
CPU max MHz:                3910.2529
CPU min MHz:                1500.0000
BogoMIPS:                   5399.92
Virtualization:             AMD-V
L1d cache:                  2 MiB
L1i cache:                  2 MiB
L2 cache:                   64 MiB
L3 cache:                   256 MiB
NUMA node0 CPU(s):         0-31,64-95
NUMA node1 CPU(s):         32-63,96-127
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:        Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:   Not affected
Vulnerability Spec rstack overflow: Mitigation; safe RET
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:  Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                             filling, PBRSE-eIBRS Not affected
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected
Flags:                      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                             clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                             lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                             rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                             movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                             cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                             topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                             cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                             fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                             rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                             avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                             cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                             wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                             vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                             v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                             gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                             rdpid overflow_recov succor smca fsrm flush_l1d

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL
L1d 32K 2M 8 Data 1
L1i 32K 2M 8 Instruction 1
L2 1M 64M 8 Unified 2
L3 32M 256M 16 Unified 3

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-31,64-95
node 0 size: 515770 MB
node 0 free: 514032 MB
node 1 cpus: 32-63,96-127
node 1 size: 515986 MB
node 1 free: 514229 MB
node distances:
node  0  1
  0: 10 32
  1: 32 10
```

9. /proc/meminfo

```
MemTotal:      1056519592 kB
```

10. who -r

```
run-level 3 Jan 30 16:07
```

11. Systemd service manager version: systemd 245 (245.4-4ubuntu3.20)

```
Default Target Status
multi-user      degraded
```

12. Failed units, from systemctl list-units --state=failed

```
UNIT                                LOAD    ACTIVE SUB    DESCRIPTION
* fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
```

13. Services, from systemctl list-unit-files

```
STATE      UNIT FILES
enabled    ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
accounts-daemon anacron apparmor autovt@ avahi-daemon bluetooth console-setup cron cups
cups-browsed dmesg e2scrub_reap getty@ gpu-manager grub-common grub-initrd-fallback
irqbalance kerneloops keyboard-setup network-manager networkd-dispatcher ondemand openvpn
pppd-dns rsync rsyslog secureboot-db setvtrgb snapd ssh sshd switcheroo-control syslog
systemd-pstore systemd-resolved systemd-timesyncd thermald ua-reboot-cmds udisks2 ufw
unattended-upgrades whoopsie wpa_supplicant
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled   acpid brltty console-getty debug-shell ipmievd openvpn-client@ openvpn-server@ openvpn@
rtkit-daemon serial-getty@ speech-dispatcher speech-dispatcherd
systemd-boot-check-no-failures systemd-network-generator systemd-networkd
systemd-networkd-wait-online systemd-time-wait-sync upower wpa_supplicant-nl80211@
wpa_supplicant-wired@ wpa_supplicant@
generated  apport ipmidrv openipmi
indirect   display-manager lightdm saned@ spice-vdagent spice-vdagentd uidd
masked    alsactl cryptdisks cryptdisks-early hwclock pulseaudio-enable-autospawn rc rcS saned
sudo x11-common
```

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.15.0-92-generic
root=UUID=1ae71a13-cac0-48f6-b6e6-e15e5e687f57
ro
quiet
splash
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Platform Notes (Continued)

vt.handoff=7

15. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	1

16. /sys/kernel/mm/transparent_hugepage

defrag	[always]	defer	defer+madvise	madvise	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

17. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

18. OS release

From /etc/*-release /etc/*-version
os-release Ubuntu 20.04.4 LTS

19. Disk information

SPEC is set to: /home/cpu2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4 938G 20G 870G 3% /

20. /sys/devices/virtual/dmi/id

Vendor: Tyrone Systems
Product: Tyrone Camarero SDA200A2N-212
Product Family: SMC H13
Serial: A509935X3C01325

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECSpeed®2017_fp_base = 277
SPECSpeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Platform Notes (Continued)

21. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x NO DIMM NO DIMM
16x Samsung M321R8GA0BB0-CQKZJ 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.6
BIOS Date: 11/16/2023
BIOS Revision: 5.27

Compiler Version Notes

=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
=====

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
=====

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277
SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Compiler Version Notes (Continued)

Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jun-2023

Software Availability: Jan-2024

Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277

SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Jan-2024

Hardware Availability: Jun-2023

Software Availability: Jan-2024

Peak Optimization Flags (Continued)

638.imagick_s: Same as 619.lbm_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECSpeed®2017_fp_base = 277

SPECSpeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

Peak Optimization Flags (Continued)

627.cam4_s (continued):

```
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9
-mllvm -unroll-threshold=50 -freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Tyrone Systems
(Test Sponsor: Netweb Pte Ltd)
(Tyrone Camarero SDA200A2N-18)
(2.70 GHz, AMD EPYC 9334)

SPECspeed®2017_fp_base = 277
SPECspeed®2017_fp_peak = 283

CPU2017 License: 6042
Test Sponsor: Netweb Pte Ltd
Tested by: Tyrone Systems

Test Date: Jan-2024
Hardware Availability: Jun-2023
Software Availability: Jan-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>
<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-Genoa-revC.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-31 05:34:38-0500.
Report generated on 2024-02-28 19:10:23 by CPU2017 PDF formatter v6716.
Originally published on 2024-02-27.