



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_fp_peak = 337

CPU2017 License: 6573


Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

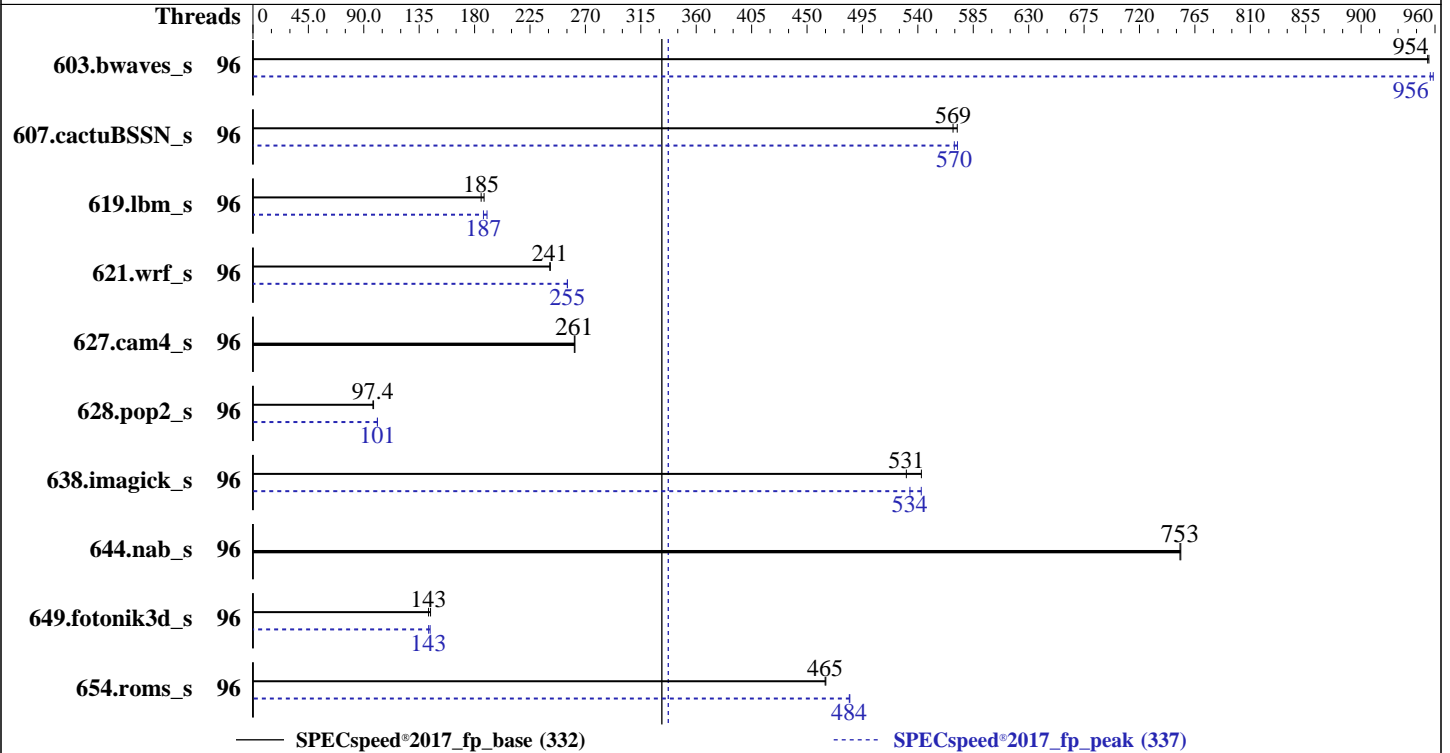

Hardware

CPU Name: AMD EPYC 9684X
 Max MHz: 3700
 Nominal: 2550
 Enabled: 96 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 1152 MB I+D on chip per chip, 96 MB shared / 8 cores
 Other: None
 Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 70 GB on tmpfs
 Other: None

Software

OS: Ubuntu 22.04.3 LTS
 5.15.0-84-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.4.6 released Jul-2023
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_fp_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECSpeed®2017_fp_peak = 337

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2023
Hardware Availability: May-2023
Software Availability: Sep-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	96	61.8	955	61.8	954			96	61.7	956	61.5	959		
607.cactuBSSN_s	96	29.3	569	29.1	572			96	29.1	572	29.3	570		
619.lbm_s	96	28.3	185	27.9	188			96	28.0	187	27.6	190		
621.wrf_s	96	54.8	242	54.9	241			96	51.8	255	51.8	255		
627.cam4_s	96	34.0	261	33.9	262			96	34.0	261	33.9	262		
628.pop2_s	96	122	97.4	121	98.0			96	117	101	117	101		
638.imagick_s	96	27.2	531	26.6	543			96	26.6	543	27.0	534		
644.nab_s	96	23.2	754	23.2	753			96	23.2	754	23.2	753		
649.fotonik3d_s	96	63.2	144	63.9	143			96	63.9	143	63.4	144		
654.roms_s	96	33.9	465	33.8	465			96	32.5	485	32.5	484		

SPECSpeed®2017_fp_base = 332

SPECSpeed®2017_fp_peak = 337

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To always enable THP for peak runs of:
603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_fp_peak = 337

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

Operating System Notes (Continued)

```
run as root.
To disable THP for peak runs of 621.wrf_s:
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
To enable THP only on request for peak runs of 654.roms_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-95"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "96"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-95"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:
GOMP_CPU_AFFINITY = "0-95"
PGHPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0 48 1 49 2 50 3 51 4 52 5 53 6 54 7 55 8 56 9 57 10 58 11 59 12 60 13 61 14 62 15 63
16 64 17 65 18 66 19 67 20 68 21 69 22 70 23 71 24 72 25 73 26 74 27 75 28 76 29 77 30 78 31 79 32 80
33 81 34 82 35 83 36 84 37 85 38 86 39 87 40 88 41 89 42 90 43 91 44 92 45 93 46 94 47 95"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_fp_peak = 337

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

General Notes (Continued)

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

DRAM Refresh Delay : Performance
DIMM Self Healing on
Uncorrectable Memory Error : Disabled

Logical Processor : Disabled
Virtualization Technology : Disabled
NUMA Nodes per Socket : 1

System Profile : Custom
C-States : Disabled
Memory Patrol Scrub : Disabled
PCI ASPM L1 Link
Power Management : Disabled
Determinism Slider : Power Determinism
Algorithm Performance
Boost Disable (ApbDis) : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on amd-spa Mon Dec 11 01:31:06 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. tuned-adm active
 16. sysctl
 17. /sys/kernel/mm/transparent_hugepage
 18. /sys/kernel/mm/transparent_hugepage/khugepaged
 19. OS release
 20. Disk information
 21. /sys/devices/virtual/dmi/id
 22. dmidecode
 23. BIOS
-

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_fp_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017_fp_peak = 337

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

Platform Notes (Continued)

- ```

1. uname -a
 Linux amd-spa 5.15.0-84-generic #93-Ubuntu SMP Tue Sep 5 17:16:10 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
 01:31:06 up 2:17, 1 user, load average: 5.55, 5.36, 3.20
 USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
 root tty1 - 23:14 2:16m 1.95s 0.39s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

3. Username
 From environment variable $USER: root

4. ulimit -a
 time(seconds) unlimited
 file(blocks) unlimited
 data(kbytes) unlimited
 stack(kbytes) unlimited
 coredump(blocks) 0
 memory(kbytes) unlimited
 locked memory(kbytes) 2097152
 process 3092298
 nofiles 1024
 vmemory(kbytes) unlimited
 locks unlimited
 rtprio 0

5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 /bin/bash ./DELL_speed.sh
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-main.sh speed
 /bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
 --define DL-VERS=v4.8.1 --output_format html,pdf,txt
 python3 ./run_amd_speed_aocc400_znver4_A1.py
 /bin/bash ./amd_speed_aocc400_znver4_A1.sh
 runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
 DL-BIOS-NPS=1 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1
 --output_format html,pdf,txt fpspeed
 runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
 DL-BIOS-NPS=1 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.1
 --output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size test:train:refspeed fpspeed
 --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0
 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
 $SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1

6. /proc/cpuinfo
 model name : AMD EPYC 9684X 96-Core Processor
 vendor_id : AuthenticAMD
 cpu family : 25
 model : 17
 stepping : 2
 microcode : 0xa10123e

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017\_fp\_peak = 337

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Dec-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Sep-2023

### Platform Notes (Continued)

bugs : sysret\_ss\_attrs spectre\_v1 spectre\_v2 spec\_store\_bypass  
TLB size : 3584 4K pages  
cpu cores : 96  
siblings : 96  
1 physical ids (chips)  
96 processors (hardware threads)  
physical id 0: core ids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183  
physical id 0: apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119,128-135,144-151,160-167,176-183  
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 96
On-line CPU(s) list: 0-95
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9684X 96-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 1
Core(s) per socket: 96
Socket(s): 1
Stepping: 2
BogoMIPS: 5101.70
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_l1d

Virtualization: AMD-V
L1d cache: 3 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 96 MiB (96 instances)
L3 cache: 1.1 GiB (12 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECSpeed®2017\_fp\_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECSpeed®2017\_fp\_peak = 337

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Dec-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Sep-2023

### Platform Notes (Continued)

|                                  |                                                                                                          |
|----------------------------------|----------------------------------------------------------------------------------------------------------|
| Vulnerability Retbleed:          | Not affected                                                                                             |
| Vulnerability Spec store bypass: | Mitigation; Speculative Store Bypass disabled via prctl and seccomp                                      |
| Vulnerability Spectre v1:        | Mitigation; usercopy/swaps barriers and __user pointer sanitization                                      |
| Vulnerability Spectre v2:        | Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling, PBRSE-eIBRS Not affected |
| Vulnerability Srbds:             | Not affected                                                                                             |
| Vulnerability Tsx async abort:   | Not affected                                                                                             |

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 32K      | 3M       | 8    | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 3M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 96M      | 8    | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 96M      | 1.1G     | 16   | Unified     | 3     | 98304 | 1        | 64             |

8. numactl --hardware

```
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-95
node 0 size: 773187 MB
node 0 free: 767498 MB
node distances:
node 0
0: 10
```

9. /proc/meminfo

MemTotal: 791744504 kB

10. who -r

run-level 5 Dec 10 23:13

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)

|                |         |
|----------------|---------|
| Default Target | Status  |
| graphical      | running |

12. Services, from systemctl list-unit-files

| STATE           | UNIT FILES                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled         | ModemManager apparmor blk-availability console-setup cron dmesg e2scrub_reap finalrd<br>getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors<br>lvm2-monitor lxd-agent multipathd networkd-dispatcher open-vm-tools pollinate rsyslog<br>secureboot-db setvtrgb ssh systemd-networkd systemd-pstore systemd-resolved<br>systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth |
| enabled-runtime | netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs                                                                                                                                                                                                                                                                                                                                                                                        |
| disabled        | console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@<br>systemd-boot-check-no-failures systemd-network-generator systemd-sysext<br>systemd-time-wait-sync upower                                                                                                                                                                                                                                                            |
| generated       | apport                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| indirect        | uuuid                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| masked          | cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo<br>systemd-networkd-wait-online x11-common                                                                                                                                                                                                                                                                                                             |

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/vmlinuz-5.15.0-84-generic  
root=/dev/mapper/ubuntu--vg-ubuntu--lv

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017\_fp\_peak = 337

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Platform Notes (Continued)

ro

```

14. cpupower frequency-info
analyzing CPU 0:
 Unable to determine current policy
 boost state support:
 Supported: yes
 Active: yes
 Boost States: 0
 Total States: 3
 Pstate-P0: 2550MHz

```

```

15. tuned-adm active
 Current active profile: latency-performance

```

```

16. sysctl
kernel.numa_balancing 0
kernel.randomize_va_space 0
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 3
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 8
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 1
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 1

```

```

17. /sys/kernel/mm/transparent_hugepage
defrag [always] defer defer+madvise madvise never
enabled [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

```

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

```

```

19. OS release
 From /etc/*-release /etc/*-version
 os-release Ubuntu 22.04.3 LTS

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017\_fp\_peak = 337

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: May-2023  
Software Availability: Sep-2023

## Platform Notes (Continued)

20. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 70G 3.4G 67G 5% /mnt/ramdisk

21. /sys/devices/virtual/dmi/id  
Vendor: Dell Inc.  
Product: PowerEdge R6615  
Product Family: PowerEdge  
Serial: GLM4018

22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
12x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 1.4.6  
BIOS Date: 07/06/2023  
BIOS Revision: 1.4

## Compiler Version Notes

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017\_fp\_peak = 337

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Compiler Version Notes (Continued)

-----  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

-----  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECSpeed®2017\_fp\_peak = 337

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

## Base Portability Flags (Continued)

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017\_fp\_peak = 337

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-lflang

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017\_fp\_peak = 337

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

638.imagick\_s: Same as 619.lbm\_s

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang
```

654.roms\_s: Same as 603.bwaves\_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017\_fp\_peak = 337

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Peak Optimization Flags (Continued)

621.wrf\_s (continued):

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

627.cam4\_s: basepeak = yes

628.pop2\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast

-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp

-flto -fstruct-layout=9 -mllvm -unroll-threshold=50

-fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000

-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt

-Mrecursive -fvector-transform -fscalar-transform

-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Benchmarks using Fortran, C, and C++:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3

-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4

-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9

-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining

-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3

-DSPEC\_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100

-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.html](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.html>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 332

PowerEdge R6615 (AMD EPYC 9684X 96-Core Processor)

SPECspeed®2017\_fp\_peak = 337

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Dec-2023

**Hardware Availability:** May-2023

**Software Availability:** Sep-2023

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.xml](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-10 20:31:05-0500.

Report generated on 2024-02-29 17:30:56 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-29.