



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573


Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

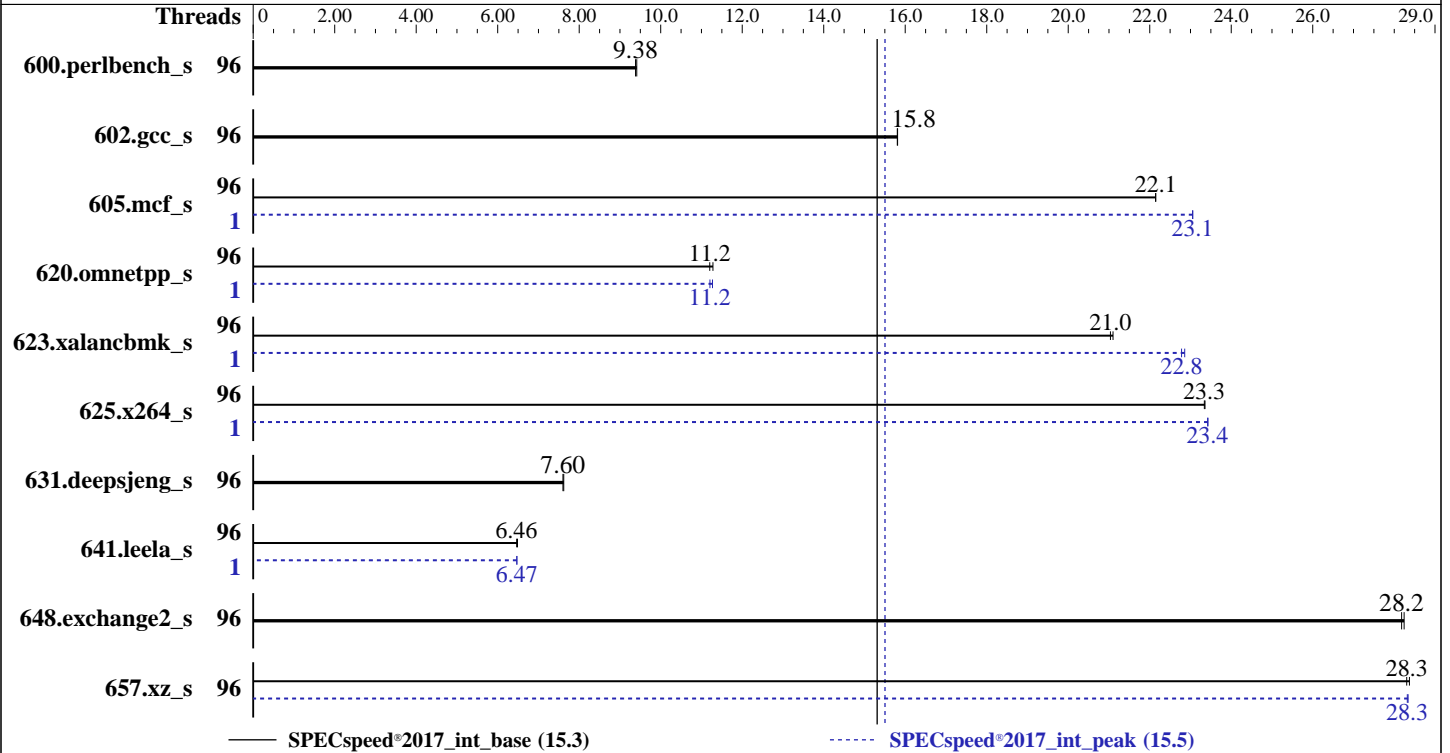

### Hardware

CPU Name: AMD EPYC 9474F  
 Max MHz: 4100  
 Nominal: 3600  
 Enabled: 96 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 6 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 70 GB on tmpfs  
 Other: None

### Software

OS: Ubuntu 22.04.3 LTS  
 5.15.0-84-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.4.6 released Jul-2023  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: May-2023  
Software Availability: Sep-2023

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	189	9.41	<b><u>189</u></b>	<b><u>9.38</u></b>			96	189	9.41	<b><u>189</u></b>	<b><u>9.38</u></b>		
602.gcc_s	96	<b><u>252</u></b>	<b><u>15.8</u></b>	252	15.8			96	<b><u>252</u></b>	<b><u>15.8</u></b>	252	15.8		
605.mcf_s	96	<b><u>213</u></b>	<b><u>22.1</u></b>	213	22.1			1	<b><u>205</u></b>	<b><u>23.1</u></b>	205	23.1		
620.omnetpp_s	96	145	11.3	<b><u>146</u></b>	<b><u>11.2</u></b>			1	145	11.3	<b><u>146</u></b>	<b><u>11.2</u></b>		
623.xalancbmk_s	96	<b><u>67.4</u></b>	<b><u>21.0</u></b>	67.2	21.1			1	62.0	22.9	<b><u>62.2</u></b>	<b><u>22.8</u></b>		
625.x264_s	96	<b><u>75.6</u></b>	<b><u>23.3</u></b>	75.5	23.4			1	<b><u>75.3</u></b>	<b><u>23.4</u></b>	75.3	23.4		
631.deepsjeng_s	96	188	7.62	<b><u>189</u></b>	<b><u>7.60</u></b>			96	188	7.62	<b><u>189</u></b>	<b><u>7.60</u></b>		
641.leela_s	96	263	6.49	<b><u>264</u></b>	<b><u>6.46</u></b>			1	<b><u>264</u></b>	<b><u>6.47</u></b>	264	6.47		
648.exchange2_s	96	<b><u>104</u></b>	<b><u>28.2</u></b>	104	28.2			96	<b><u>104</u></b>	<b><u>28.2</u></b>	104	28.2		
657.xz_s	96	<b><u>218</u></b>	<b><u>28.3</u></b>	218	28.4			96	218	28.3	<b><u>218</u></b>	<b><u>28.3</u></b>		

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-95"
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "96"
```

Environment variables set by runcpu during the 605.mcf\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 625.x264\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 641.leela\_s peak run:

```
GOMP_CPU_AFFINITY = "15"
```

Environment variables set by runcpu during the 657.xz\_s peak run:

```
GOMP_CPU_AFFINITY = "0-95"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 70 GB ramdisk created with the cmd: "mount -t tmpfs -o size=70G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
DRAM Refresh Delay : Performance
DIMM Self Healing on
Uncorrectable Memory Error : Disabled
```

```
Logical Processor : Disabled
Virtualization Technology : Disabled
NUMA Nodes per Socket : 2
```

```
System Profile : Custom
C-States : Disabled
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Platform Notes (Continued)

Memory Patrol Scrub : Disabled  
 PCI ASPM L1 Link  
 Power Management : Disabled  
 Determinism Slider : Power Determinism  
 Algorithm Performance  
 Boost Disable (ApbDis) : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on amd-spa Tue Dec 12 02:42:26 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux amd-spa 5.15.0-84-generic #93-Ubuntu SMP Tue Sep 5 17:16:10 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
02:42:26 up 4 min, 1 user, load average: 0.24, 0.09, 0.02
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      ttyl    -             02:41   34.00s 1.64s  0.30s /bin/bash ./amd_speed_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: May-2023  
Software Availability: Sep-2023

## Platform Notes (Continued)

```

stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)        unlimited
locked memory(kbytes) 2097152
process               6190392
nofiles               1024
vmemory(kbytes)       unlimited
locks                 unlimited
rtprio                0

```

### 5. sysinfo process ancestry

```

/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-addcd=1
--define DL-VERS=v4.8.1 --output_format html, pdf, txt
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=2 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-addcd=1
--define DL-VERS=v4.8.1 --output_format html, pdf, txt
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=2 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-addcd=1
--define DL-VERS=v4.8.1 --output_format html, pdf, txt --nopower --runmode speed --tune base:peak --size
test:train:refspeed intspeer --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeer.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1

```

### 6. /proc/cpuinfo

```

model name      : AMD EPYC 9474F 48-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa10113e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 48
siblings       : 48
2 physical ids (chips)
96 processors (hardware threads)
physical id 0: core ids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
physical id 1: core ids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
physical id 0: apicids 0-5,16-21,32-37,48-53,64-69,80-85,96-101,112-117
physical id 1: apicids 128-133,144-149,160-165,176-181,192-197,208-213,224-229,240-245
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

### 7. lscpu

```

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Dec-2023  
**Hardware Availability:** May-2023  
**Software Availability:** Sep-2023

### Platform Notes (Continued)

```

Address sizes:                52 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                        96
On-line CPU(s) list:         0-95
Vendor ID:                     AuthenticAMD
Model name:                   AMD EPYC 9474F 48-Core Processor
CPU family:                   25
Model:                         17
Thread(s) per core:          1
Core(s) per socket:          48
Socket(s):                    2
Stepping:                    1
BogoMIPS:                    7202.34
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                cflflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                                lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                                rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                                movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                                cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                                topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                                cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                                fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                                rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                                avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                                cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                                wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                                vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                                v_omsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                                gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopsntdq la57
                                rdpid overflow_recov succor smca fsrm flush_l1d

Virtualization:               AMD-V
L1d cache:                   3 MiB (96 instances)
L1i cache:                   3 MiB (96 instances)
L2 cache:                    96 MiB (96 instances)
L3 cache:                    512 MiB (16 instances)
NUMA node(s):                8
NUMA node0 CPU(s):           0-11
NUMA node1 CPU(s):           12-23
NUMA node2 CPU(s):           24-35
NUMA node3 CPU(s):           36-47
NUMA node4 CPU(s):           48-59
NUMA node5 CPU(s):           60-71
NUMA node6 CPU(s):           72-83
NUMA node7 CPU(s):           84-95
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:   Not affected
Vulnerability L1tf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:       Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:      Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:      Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB
                                filling, PBRBS-eIBRS Not affected

Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:  
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

### Platform Notes (Continued)

L1d	32K	3M	8 Data	1	64	1	64
L1i	32K	3M	8 Instruction	1	64	1	64
L2	1M	96M	8 Unified	2	2048	1	64
L3	32M	512M	16 Unified	3	32768	1	64

#### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-11
node 0 size: 193078 MB
node 0 free: 192635 MB
node 1 cpus: 12-23
node 1 size: 193531 MB
node 1 free: 193191 MB
node 2 cpus: 24-35
node 2 size: 193531 MB
node 2 free: 193207 MB
node 3 cpus: 36-47
node 3 size: 193515 MB
node 3 free: 193231 MB
node 4 cpus: 48-59
node 4 size: 193531 MB
node 4 free: 193219 MB
node 5 cpus: 60-71
node 5 size: 193531 MB
node 5 free: 189721 MB
node 6 cpus: 72-83
node 6 size: 193484 MB
node 6 free: 193075 MB
node 7 cpus: 84-95
node 7 size: 193505 MB
node 7 free: 193053 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

#### 9. /proc/meminfo

MemTotal: 1584856588 kB

#### 10. who -r

run-level 5 Dec 12 02:38

#### 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)

Default Target	Status
graphical	running

#### 12. Services, from systemctl list-unit-files

STATE	UNIT FILES
-------	------------

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573

Test Date: Dec-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

### Platform Notes (Continued)

```

enabled      ModemManager apparmor blk-availability console-setup cron dmesg e2scrub_reap finalrd
             getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors
             lvm2-monitor lxd-agent multipathd networkd-dispatcher open-vm-tools pollinate rsyslog
             secureboot-db setvtrgb ssh systemd-networkd systemd-pstore systemd-resolved
             systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled      console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@
             systemd-boot-check-no-failures systemd-network-generator systemd-sysext
             systemd-time-wait-sync upower
generated     apport
indirect      uuidd
masked        cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
             systemd-networkd-wait-online x11-common

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/vmlinuz-5.15.0-84-generic
    root=/dev/mapper/ubuntu--vg-ubuntu--lv
    ro

```

```

-----
14. cpupower frequency-info
    analyzing CPU 0:
    Unable to determine current policy
    boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 3600MHz

```

```

-----
15. tuned-adm active
    Current active profile: latency-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 15.3

SPECspeed®2017\_int\_peak = 15.5

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

### Platform Notes (Continued)

```

enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS

```

```

-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
Filesystem  Type  Size  Used Avail Use% Mounted on
tmpfs       tmpfs  70G   3.4G   67G   5% /mnt/ramdisk

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge R6625
Product Family: PowerEdge
Serial:      BGP4016

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  22x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
  2x 80AD000080AD HMC94MEBRA109N 64 GB 2 rank 4800

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.4.6
BIOS Date:        07/06/2023
BIOS Revision:    1.4

```

### Compiler Version Notes

```

=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
=====

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Dec-2023  
Hardware Availability: May-2023  
Software Availability: Sep-2023

## Compiler Version Notes (Continued)

Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak)  
| 641.leela\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#434 2022\_10\_28) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

Fortran benchmarks:  
flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264\_s: Same as 605.mcf\_s

657.xz\_s: Same as 605.mcf\_s

C++ benchmarks:

620.omnetpp\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Peak Optimization Flags (Continued)

620.omnetpp\_s (continued):

-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.html](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.html>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 15.3

PowerEdge R6625 (AMD EPYC 9474F 48-Core Processor)

SPECspeed®2017\_int\_peak = 15.5

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Dec-2023

**Hardware Availability:** May-2023

**Software Availability:** Sep-2023

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.xml](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-11 21:42:25-0500.

Report generated on 2024-02-29 17:30:55 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-29.