



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573


Test Date: Nov-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

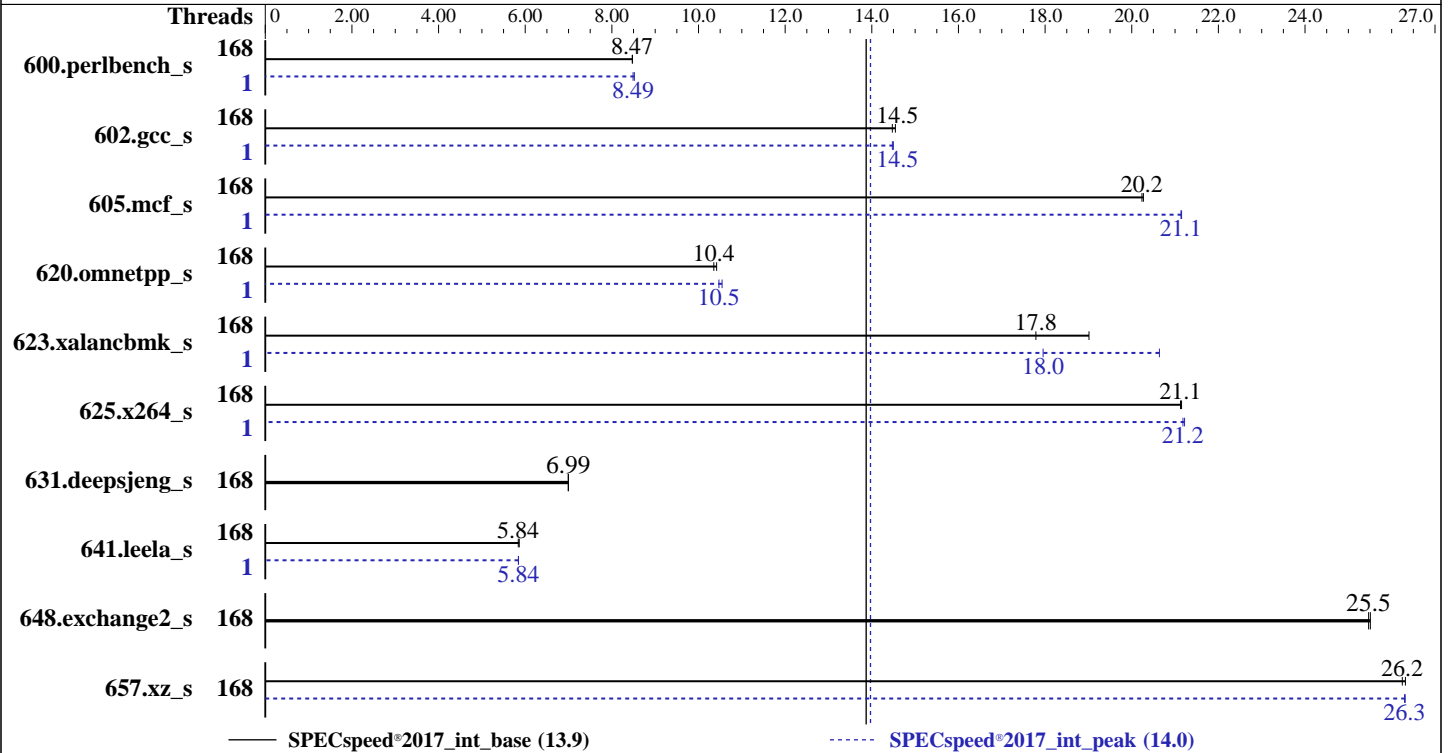

### Hardware

CPU Name: AMD EPYC 9634  
 Max MHz: 3700  
 Nominal: 2250  
 Enabled: 168 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip, 32 MB shared / 7 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 100 GB on tmpfs  
 Other: None

### Software

OS: Ubuntu 22.04.3 LTS  
 5.15.0-84-generic  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 1.4.6 released Jul-2023  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECSpeed®2017\_int\_peak = 14.0

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2023  
Hardware Availability: May-2023  
Software Availability: Sep-2023

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	168	209	8.48	<b>210</b>	<b>8.47</b>			1	208	8.52	<b>209</b>	<b>8.49</b>		
602.gcc_s	168	274	14.5	<b>275</b>	<b>14.5</b>			1	<b>275</b>	<b>14.5</b>	275	14.5		
605.mcf_s	168	233	20.3	<b>233</b>	<b>20.2</b>			1	<b>223</b>	<b>21.1</b>	223	21.2		
620.omnetpp_s	168	<b>158</b>	<b>10.4</b>	157	10.4			1	<b>156</b>	<b>10.5</b>	155	10.5		
623.xalancbmk_s	168	<b>79.7</b>	<b>17.8</b>	74.5	19.0			1	68.7	20.6	<b>78.9</b>	<b>18.0</b>		
625.x264_s	168	83.4	21.1	<b>83.5</b>	<b>21.1</b>			1	<b>83.3</b>	<b>21.2</b>	83.1	21.2		
631.deepsjeng_s	168	<b>205</b>	<b>6.99</b>	205	6.99			168	<b>205</b>	<b>6.99</b>	205	6.99		
641.leela_s	168	291	5.86	<b>292</b>	<b>5.84</b>			1	<b>292</b>	<b>5.84</b>	292	5.85		
648.exchange2_s	168	115	25.5	<b>115</b>	<b>25.5</b>			168	115	25.5	<b>115</b>	<b>25.5</b>		
657.xz_s	168	235	26.3	<b>236</b>	<b>26.2</b>			168	<b>235</b>	<b>26.3</b>	235	26.3		

SPECSpeed®2017\_int\_base = **13.9**

SPECSpeed®2017\_int\_peak = **14.0**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-167"  
LD\_LIBRARY\_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/amd\_speed\_aocc400\_znver4\_A\_lib/lib:"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"  
MALLOC\_CONF = "oversize\_threshold:0,retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "168"

Environment variables set by runcpu during the 600.perlbench\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 602.gcc\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 641.leela\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-167"  
LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "8"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 100 GB ramdisk created with the cmd: "mount -t tmpfs -o size=100G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

DRAM Refresh Delay : Performance  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Platform Notes (Continued)

Logical Processor : Disabled  
Virtualization Technology : Disabled  
NUMA Nodes per Socket : 2

System Profile : Custom  
C-States : Disabled  
Memory Patrol Scrub : Disabled  
PCI ASPM L1 Link  
Power Management : Disabled  
Determinism Slider : Power Determinism  
Algorithm Performance  
Boost Disable (ApbDis) : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on amd-spa Sun Nov 5 17:24:41 2023

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a  
Linux amd-spa 5.15.0-84-generic #93-Ubuntu SMP Tue Sep 5 17:16:10 UTC 2023 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
17:24:41 up 2 min, 1 user, load average: 0.27, 0.12, 0.04  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 17:23 40.00s 1.76s 0.37s /bin/bash ./amd\_speed\_aocc400\_znver4\_A1.sh

3. Username  
From environment variable \$USER: root

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Platform Notes (Continued)

```

-----
4. ulimit -a
time(seconds)          unlimited
file(blocks)           unlimited
data(kbytes)           unlimited
stack(kbytes)          unlimited
coredump(blocks)      0
memory(kbytes)         unlimited
locked memory(kbytes) 2097152
process                6190306
nofiles                1024
vmemory(kbytes)        unlimited
locks                  unlimited
rtprio                 0

-----
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-speccpu.sh speed --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.1 --output_format html,pdf,txt
python3 ./run_amd_speed_aocc400_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=2 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.1 --output_format html,pdf,txt intspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 2 --define
DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=2 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-adddcD=1
--define DL-VERS=v4.8.1 --output_format html,pdf,txt --nopower --runmode speed --tune base:peak --size
test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9634 84-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 17
stepping       : 1
microcode      : 0xa10113e
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 84
siblings       : 84
2 physical ids (chips)
168 processors (hardware threads)
physical id 0: core ids 0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182
physical id 1: core ids 0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182
physical id 0: apicids 0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182
physical id 1: apicids
256-262,272-278,288-294,304-310,320-326,336-342,352-358,368-374,384-390,400-406,416-422,432-438
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2023  
Hardware Availability: May-2023  
Software Availability: Sep-2023

## Platform Notes (Continued)

-----  
7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                168
On-line CPU(s) list:   0-167
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9634 84-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    1
Core(s) per socket:    84
Socket(s):             2
Stepping:              1
BogoMIPS:              4501.42
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
                        lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf
                        rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic
                        movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic
                        cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce
                        topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3
                        cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall
                        fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq
                        rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
                        avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc
                        cqm_mbm_total cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru
                        wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale
                        vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic
                        v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2
                        gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
                        rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:        AMD-V
L1d cache:             5.3 MiB (168 instances)
L1i cache:             5.3 MiB (168 instances)
L2 cache:              168 MiB (168 instances)
L3 cache:              768 MiB (24 instances)
NUMA node(s):          8
NUMA node0 CPU(s):    0-20
NUMA node1 CPU(s):    21-41
NUMA node2 CPU(s):    42-62
NUMA node3 CPU(s):    63-83
NUMA node4 CPU(s):    84-104
NUMA node5 CPU(s):    105-125
NUMA node6 CPU(s):    126-146
NUMA node7 CPU(s):    147-167
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:       Not affected
Vulnerability L1tf:                Not affected
Vulnerability Mds:                 Not affected
Vulnerability Meltdown:            Not affected
Vulnerability Mmio stale data:     Not affected
Vulnerability Retbleed:            Not affected
Vulnerability Spec store bypass:    Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:          Mitigation; usercopy/swapgs barriers and __user pointer sanitization

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Date: Nov-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

### Platform Notes (Continued)

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP disabled, RSB filling, PBRSE-eIBRS Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	5.3M	8	Data	1	64	1	64
L1i	32K	5.3M	8	Instruction	1	64	1	64
L2	1M	168M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-20
node 0 size: 193075 MB
node 0 free: 192480 MB
node 1 cpus: 21-41
node 1 size: 193481 MB
node 1 free: 189433 MB
node 2 cpus: 42-62
node 2 size: 193529 MB
node 2 free: 192936 MB
node 3 cpus: 63-83
node 3 size: 193513 MB
node 3 free: 193007 MB
node 4 cpus: 84-104
node 4 size: 193529 MB
node 4 free: 193199 MB
node 5 cpus: 105-125
node 5 size: 193529 MB
node 5 free: 193184 MB
node 6 cpus: 126-146
node 6 size: 193529 MB
node 6 free: 193197 MB
node 7 cpus: 147-167
node 7 size: 193502 MB
node 7 free: 193053 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10

```

9. /proc/meminfo

MemTotal: 1584834436 kB

10. who -r

run-level 5 Nov 5 17:22

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Date: Nov-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Sep-2023

## Platform Notes (Continued)

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.10)

```
Default Target Status
graphical          running
```

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager apparmor blk-availability console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor lxd-agent multipathd networkd-dispatcher open-vm-tools pollinate rsyslog secureboot-db setvtrgb ssh systemd-networkd systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
enabled-runtime	netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled	console-getty debug-shell iscsid nftables open-iscsi rsync serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync upower
generated	apport
indirect	uuid
masked	cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo systemd-networkd-wait-online x11-common

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/vmlinuz-5.15.0-84-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
```

14. cpupower frequency-info

```
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2250MHz
```

15. tuned-adm active

```
Current active profile: latency-performance
```

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	3
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	8
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	1

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

### Platform Notes (Continued)

```

vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size  2097152
shmem_enabled always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS

```

```

-----
20. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-znver4-A1.1
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs 100G  3.4G  97G   4% /mnt/ramdisk

```

```

-----
21. /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R6625
Product Family: PowerEdge
Serial:          BGP4016

```

```

-----
22. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.

```

```

Memory:
22x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
2x 80AD000080AD HMC94MEBRA109N 64 GB 2 rank 4800

```

```

-----
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:      Dell Inc.
BIOS Version:     1.4.6
BIOS Date:        07/06/2023
BIOS Revision:    1.4

```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Compiler Version Notes

```

-----
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

```

-----
C++   | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

```

-----
Fortran | 648.exchange2_s(base, peak)
-----

```

```

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----

```

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Base Portability Flags (Continued)

641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang  
-lamdalloc

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

```
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

605.mcf\_s: Same as 600.perlbench\_s

625.x264\_s: Same as 600.perlbench\_s

657.xz\_s: Same as 600.perlbench\_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng\_s: basepeak = yes

```
641.leela_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Fortran benchmarks:

648.exchange2\_s: basepeak = yes



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 13.9

PowerEdge R6625 (AMD EPYC 9634 84-Core Processor)

SPECspeed®2017\_int\_peak = 14.0

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: May-2023

Software Availability: Sep-2023

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.html](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/aocc400-flags\\_A1.1.xml](http://www.spec.org/cpu2017/flags/aocc400-flags_A1.1.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-05 12:24:41-0500.

Report generated on 2024-02-29 17:33:56 by CPU2017 PDF formatter v6716.

Originally published on 2024-02-29.