



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Jun-2023

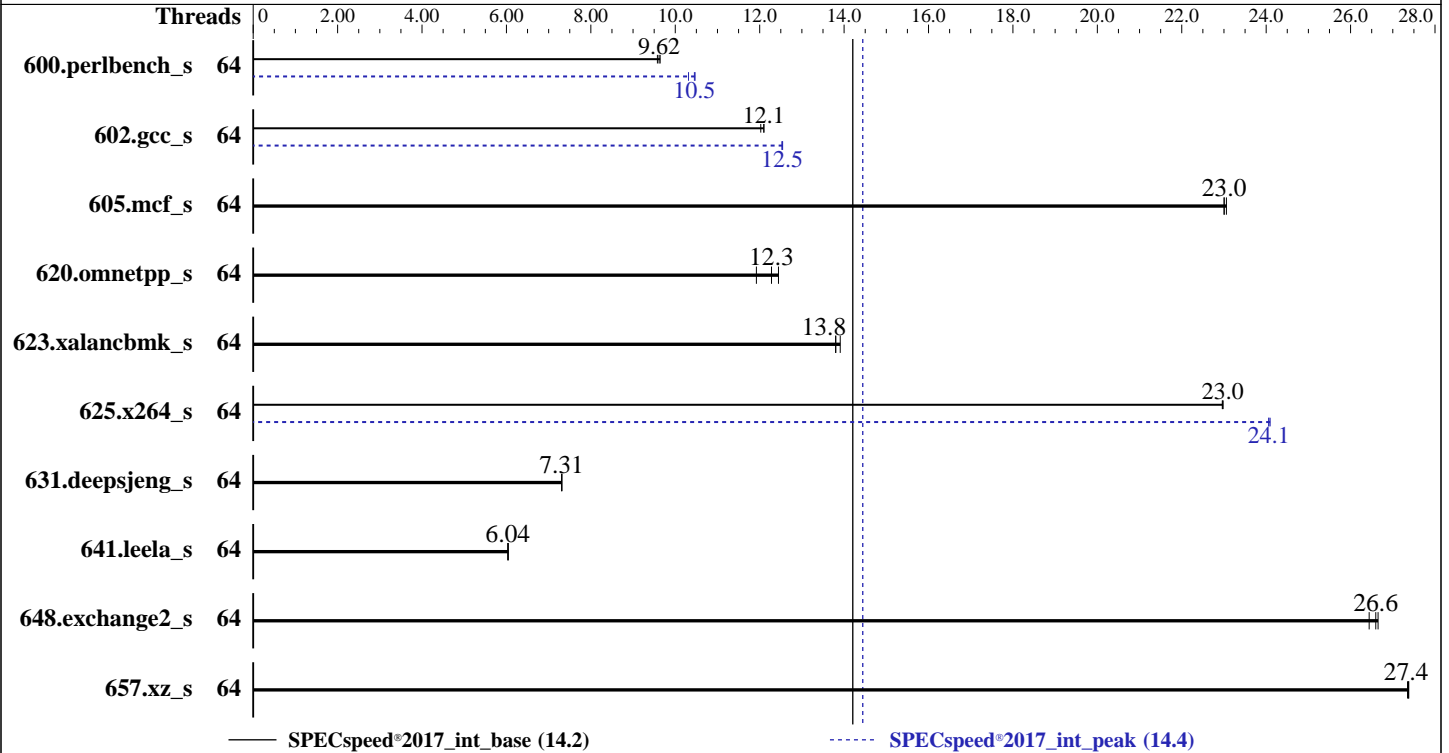

### Hardware

CPU Name: Intel Xeon Gold 6530  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 64 cores, 2 chips  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 160 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 4.3.3a released Jan-2024  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer power save with minimal impact on performance



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Jun-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	184	9.64	<b>185</b>	<b>9.62</b>	185	9.58	64	<b>170</b>	<b>10.5</b>	172	10.3	170	10.5
602.gcc_s	64	<b>329</b>	<b>12.1</b>	329	12.1	331	12.0	64	317	12.5	<b>318</b>	<b>12.5</b>	318	12.5
605.mcf_s	64	205	23.1	<b>205</b>	<b>23.0</b>	205	23.0	64	205	23.1	<b>205</b>	<b>23.0</b>	205	23.0
620.omnetpp_s	64	131	12.4	137	11.9	<b>133</b>	<b>12.3</b>	64	131	12.4	137	11.9	<b>133</b>	<b>12.3</b>
623.xalancbmk_s	64	102	13.9	<b>103</b>	<b>13.8</b>	103	13.8	64	102	13.9	<b>103</b>	<b>13.8</b>	103	13.8
625.x264_s	64	<b>76.8</b>	<b>23.0</b>	76.8	23.0	76.8	23.0	64	<b>73.3</b>	<b>24.1</b>	73.3	24.1	73.2	24.1
631.deepsjeng_s	64	<b>196</b>	<b>7.31</b>	196	7.31	196	7.31	64	<b>196</b>	<b>7.31</b>	196	7.31	196	7.31
641.leela_s	64	282	6.04	<b>283</b>	<b>6.04</b>	283	6.03	64	282	6.04	<b>283</b>	<b>6.04</b>	283	6.03
648.exchange2_s	64	111	26.4	<b>111</b>	<b>26.6</b>	110	26.7	64	111	26.4	<b>111</b>	<b>26.6</b>	110	26.7
657.xz_s	64	226	27.4	<b>226</b>	<b>27.4</b>	226	27.3	64	226	27.4	<b>226</b>	<b>27.4</b>	226	27.3

SPECspeed®2017\_int\_base = **14.2**

SPECspeed®2017\_int\_peak = **14.4**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-64"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Jun-2023

## Platform Notes

### BIOS Settings:

Intel Hyper-Threading Technology set to Disabled  
Sub NUMA Clustering set to Disabled  
LLC Dead Line set to Disabled  
ADDDC Sparing set to Disabled  
Processor C6 Report set to Enabled  
UPI Power Management set to Enabled  
Enhanced CPU performance set to Auto

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Sat Feb 24 22:41:48 2024

SUT (System Under Test) info as seen by some common utilities.

### ----- Table of contents -----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
22:41:48 up 2 min, 1 user, load average: 1.54, 1.69, 0.73  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 22:40 12.00s 2.40s 0.18s -bash  
-----

3. Username  
From environment variable \$USER: root  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

```
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority     (-e) 0
  file size               (blocks, -f) unlimited
  pending signals        (-i) 4126945
  max locked memory      (kbytes, -l) 64
  max memory size        (kbytes, -m) unlimited
  open files              (-n) 1024
  pipe size               (512 bytes, -p) 8
  POSIX message queues   (bytes, -q) 819200
  real-time priority     (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time                (seconds, -t) unlimited
  max user processes     (-u) 4126945
  virtual memory         (kbytes, -v) unlimited
  file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --define default-platform-flags -c ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=64
--tune all -o all --define drop_caches intspeerd
runcpu --define default-platform-flags --configfile ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg
--define cores=64 --tune all --output_format all --define drop_caches --nopower --runmode speed --tune
base:peak --size refspeerd --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.027/templogs/preenv.intspeerd.027.0.log --lognum 027.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6530
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 32
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu
From lscpu from util-linux 2.37.4:
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:                46 bits physical, 57 bits virtual
Byte Order:                   Little Endian
CPU(s):                       64
On-line CPU(s) list:         0-63
Vendor ID:                    GenuineIntel
Model name:                   INTEL(R) XEON(R) GOLD 6530
CPU family:                   6
Model:                        207
Thread(s) per core:          1
Core(s) per socket:          32
Socket(s):                    2
Stepping:                     2
CPU max MHz:                  4000.0000
CPU min MHz:                  800.0000
BogoMIPS:                     4200.00
Flags:                         fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bml hle
                                avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
                                hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg
                                avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
                                avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                amx_tile flush_lld arch_capabilities

L1d cache:                    3 MiB (64 instances)
L1i cache:                    2 MiB (64 instances)
L2 cache:                     128 MiB (64 instances)
L3 cache:                     320 MiB (2 instances)
NUMA node(s):                 2
NUMA node0 CPU(s):           0-31
NUMA node1 CPU(s):           32-63
Vulnerability Itlb multihit:  Not affected
Vulnerability Lltf:           Not affected
Vulnerability Mds:            Not affected
Vulnerability Meltdown:      Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed:       Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:     Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW
                                sequence
Vulnerability Srbds:          Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	160M	320M	20	Unified	3	131072	1	64

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0-31
node 0 size: 515734 MB
node 0 free: 508850 MB
node 1 cpus: 32-63
node 1 size: 516032 MB
node 1 free: 515153 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

9. /proc/meminfo

```
MemTotal: 1056529700 kB
```

10. who -r

```
run-level 3 Feb 24 22:39
```

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```
Default Target Status
multi-user degraded
```

12. Failed units, from systemctl list-units --state=failed

```
UNIT LOAD ACTIVE SUB DESCRIPTION
* smartd.service loaded failed failed Self Monitoring and Reporting Technology (SMART) Daemon
```

13. Services, from systemctl list-unit-files

```
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2
vncserver@

indirect wickedd
```

14. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=c651e0e8-e427-466f-8daf-c51164b1b96c
splash=silent
mitigations=auto
quiet
security=apparmor
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Feb-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Jun-2023

### Platform Notes (Continued)

15. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 4.00 GHz.  
The governor "powersave" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 1  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag [always] defer defer+madvise madvise never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5

-----  
20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 btrfs 222G 17G 203G 8% /home

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Jun-2023

### Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id

Vendor: Cisco Systems Inc  
Product: UCSC-C240-M7SX  
Serial: WZP27100DJE

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 0xCE00 M321R8GA0PB0-CWMCH 64 GB 2 rank 5600, configured at 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Cisco Systems, Inc.  
BIOS Version: C240M7.4.3.3a.0.0118241337  
BIOS Date: 01/18/2024  
BIOS Revision: 5.32

### Compiler Version Notes

C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base, peak) 625.x264\_s(base, peak) 657.xz\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak) 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 648.exchange2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Jun-2023

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Jun-2023

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

602.gcc_s: -w -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast(pass 1) -xCORE-AVX512 -O3 -ffast-math
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-fiopenmp -DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc

605.mcf_s: basepeak = yes

625.x264_s: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

657.xz_s: basepeak = yes

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M7 (Intel Xeon Gold 6530, 2.10GHz)

SPECspeed®2017\_int\_base = 14.2

SPECspeed®2017\_int\_peak = 14.4

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Feb-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Jun-2023

## Peak Optimization Flags (Continued)

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-EMR-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-EMR-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-02-25 01:41:47-0500.

Report generated on 2024-03-14 11:00:28 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-13.