



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.30 GHz, Intel Xeon Platinum 8568Y+)

SPECspeed®2017_int_base = 14.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

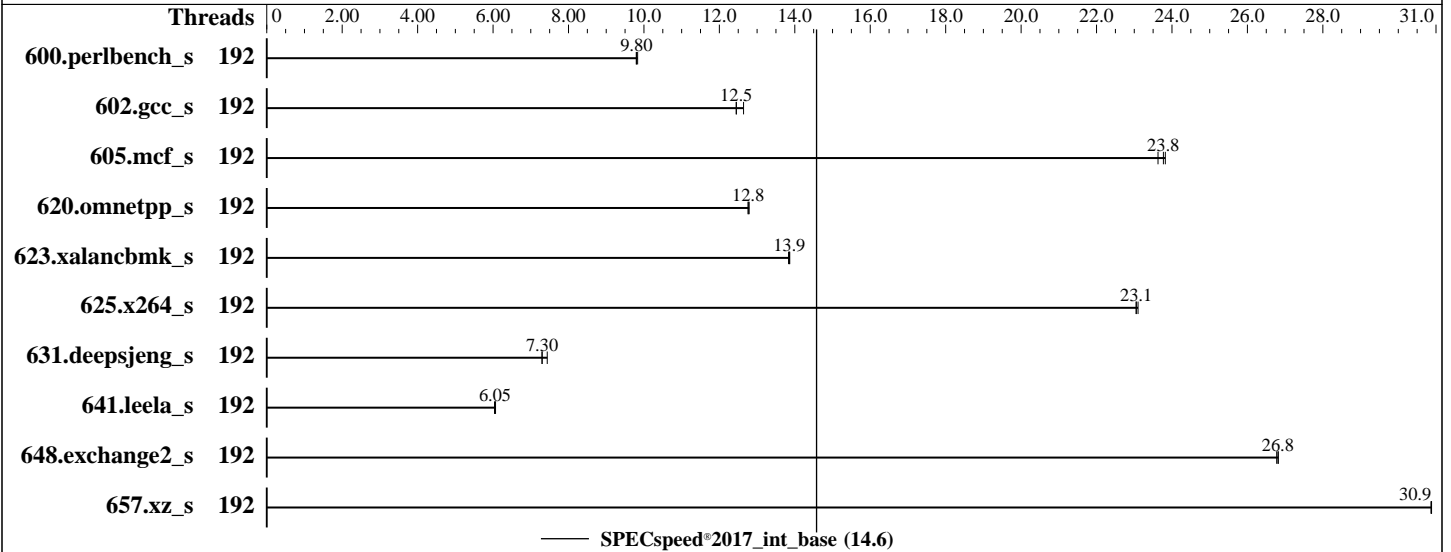

Hardware

CPU Name: Intel Xeon Platinum 8568Y+
 Max MHz: 4000
 Nominal: 2300
 Enabled: 96 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 300 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP4
 Kernel 5.14.21-150400.22-default
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version ESE121V 3.10 released Jan-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.6

ThinkSystem SR650 V3
(2.30 GHz, Intel Xeon Platinum 8568Y+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	181	9.80	<u>181</u>	<u>9.80</u>	181	9.83							
602.gcc_s	192	320	12.4	315	12.6	<u>320</u>	<u>12.5</u>							
605.mcf_s	192	198	23.8	200	23.6	<u>199</u>	<u>23.8</u>							
620.omnetpp_s	192	128	12.8	128	12.8	<u>128</u>	<u>12.8</u>							
623.xalancbmk_s	192	<u>102</u>	<u>13.9</u>	102	13.9	102	13.8							
625.x264_s	192	76.5	23.0	<u>76.5</u>	<u>23.1</u>	76.4	23.1							
631.deepsjeng_s	192	<u>196</u>	<u>7.30</u>	196	7.30	193	7.44							
641.leela_s	192	<u>282</u>	<u>6.05</u>	283	6.04	281	6.07							
648.exchange2_s	192	<u>110</u>	<u>26.8</u>	110	26.8	110	26.8							
657.xz_s	192	<u>200</u>	<u>30.9</u>	200	30.9	200	30.9							

SPECspeed®2017_int_base = 14.6

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/home/cpu2017-1.1.9-ic2023.2.3/lib/intel164:/home/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/home/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM

memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.6

ThinkSystem SR650 V3
(2.30 GHz, Intel Xeon Platinum 8568Y+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes

BIOS configuration:

Choose Operating Mode set to Custom Mode
CPU P-state Control set to Legacy
SNC set to SNC2

Sysinfo program /home/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Wed Mar 6 17:14:57 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
17:14:57 up 1 min, 1 user, load average: 0.19, 0.13, 0.05
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      tty1     -              17:14       7.00s      0.84s    0.00s    -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.6

ThinkSystem SR650 V3
(2.30 GHz, Intel Xeon Platinum 8568Y+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```

pending signals                (-i) 4126807
max locked memory              (kbytes, -l) 64
max memory size                (kbytes, -m) unlimited
open files                     (-n) 1024
pipe size                      (512 bytes, -p) 8
POSIX message queues          (bytes, -q) 819200
real-time priority            (-r) 0
stack size                    (kbytes, -s) unlimited
cpu time                      (seconds, -t) unlimited
max user processes            (-u) 4126807
virtual memory                 (kbytes, -v) unlimited
file locks                    (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=96 --tune base -o all --define
  intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-sapphirerapids-speed-20231121.cfg --define cores=96 --tune base --output_format all
  --define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base
  --size refspeed intspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.224/temlogs/preenv.intspeed.224.0.log --lognum 224.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.2.3

```

6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) PLATINUM 8568Y+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping      : 2
microcode     : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 48
siblings      : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

7. lscpu

```

From lscpu from util-linux 2.37.2:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.6

ThinkSystem SR650 V3
(2.30 GHz, Intel Xeon Platinum 8568Y+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```

Vendor ID: GenuineIntel
Model name: INTEL(R) XEON(R) PLATINUM 8568Y+
CPU family: 6
Model: 207
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s): 2
Stepping: 2
Frequency boost: enabled
CPU max MHz: 2301.0000
CPU min MHz: 800.0000
BogoMIPS: 4600.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vmmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsavesopt xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 4.5 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 192 MiB (96 instances)
L3 cache: 600 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-23,96-119
NUMA node1 CPU(s): 24-47,120-143
NUMA node2 CPU(s): 48-71,144-167
NUMA node3 CPU(s): 72-95,168-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	300M	600M	20	Unified	3	245760	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.6

ThinkSystem SR650 V3
(2.30 GHz, Intel Xeon Platinum 8568Y+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

```

node 0 cpus: 0-23,96-119
node 0 size: 257699 MB
node 0 free: 256157 MB
node 1 cpus: 24-47,120-143
node 1 size: 258035 MB
node 1 free: 256796 MB
node 2 cpus: 48-71,144-167
node 2 size: 258001 MB
node 2 free: 257491 MB
node 3 cpus: 72-95,168-191
node 3 size: 257989 MB
node 3 free: 257418 MB
node distances:
node  0  1  2  3
  0: 10 12 21 21
  1: 12 10 21 21
  2: 21 21 10 12
  3: 21 21 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      1056487224 kB

```

```

-----
10. who -r
run-level 3 Mar 6 17:13

```

```

-----
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd chronyd cron getty@ haveged irqbalance
iscsi issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback
rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info firewallld gpm
grub2-once haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiuiio issue-add-ssh-keys
kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap nmb ntp-wait ntpd
rdisc rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts smb snmpd snmptrapd
svnserve systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync systemd-timesyncd tuned udisks2
indirect wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
root=UUID=d68daf13-caf1-4614-b0e5-f766f243d7c8
splash=silent
mitigations=auto
quiet
security=apparmor

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.6

ThinkSystem SR650 V3
(2.30 GHz, Intel Xeon Platinum 8568Y+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Platform Notes (Continued)

current policy: frequency should be within 800 MHz and 2.30 GHz.
The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	60
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

20. Disk information

SPEC is set to: /home/cpu2017-1.1.9-ic2023.2.3
Filesystem Type Size Used Avail Use% Mounted on

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.30 GHz, Intel Xeon Platinum 8568Y+)

SPECspeed®2017_int_base = 14.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Mar-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

/dev/sda2 xfs 892G 84G 808G 10% /

21. /sys/devices/virtual/dmi/id
Vendor: Lenovo
Product: ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
Product Family: ThinkSystem
Serial: 1234567890

22. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
 8x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600
 8x Samsung M321R8GA0PB0-CWMMX 64 GB 2 rank 5600

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: Lenovo
BIOS Version: ESE121V-3.10
BIOS Date: 01/09/2024
BIOS Revision: 3.10
Firmware Revision: 3.90

Compiler Version Notes

C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 648.exchange2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_int_base = 14.6

ThinkSystem SR650 V3
(2.30 GHz, Intel Xeon Platinum 8568Y+)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Mar-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2024

Tested by: Lenovo Global Technology

Software Availability: Dec-2023

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(2.30 GHz, Intel Xeon Platinum 8568Y+)

SPECspeed®2017_int_base = 14.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-06 04:14:57-0500.

Report generated on 2024-03-27 20:21:36 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.